



Connecting A Changing World



PRODUCT  
**CATALOG**  
VOL:1025

[www.interstatepneumatics.com](http://www.interstatepneumatics.com)




**INTERSTATE PNEUMATICS**, a manufacturer of professional grade quality pneumatic air fittings and other pneumatic related products, is dedicated to serving the industrial hardware stores, construction supply houses, automotive distributors, tool stores, tool repair stores, and various OEMs with quality products and value.

We strive to:

- ▶ Become our customer's first choice for quality products by meeting or exceeding their expectations.
- ▶ Present exceptional product value by offering quality products, fair pricing, superb fill rates and on-time delivery while providing the best customer service and constantly improving product quality.
- ▶ Operate with integrity to achieve our mission in an ethical manner while continually improving our performance.



**Products****Page #**

<b>Quick Disconnect Couplers &amp; Plugs Interchange Chart</b>	5
<b>Couplers and Plugs</b>	6
1/4" Body Brass & Steel Industrial Interchange Couplers and Plugs	7 - 8
3/8" Body Brass & Steel Industrial Interchange Couplers and Plugs	9
1/4" Body Brass & Steel Automotive Standard Couplers and Plugs	10 - 11
1/4" & 3/8" Body Automotive & Industrial Couplers and Plugs Kits	12
3/8" Body Steel Automotive Couplers and Plugs	13 - 14
3/8" Body Steel Industrial Plugs	15
1/4" Body Brass & Steel Universal Couplers	16
3/8" Body Steel Universal Couplers	17
Easy Lock Fittings - Brass	18
1/4" & 3/8" Body Steel Automotive & Industrial Interchange Swivel Plugs	19
1/2" Body Automotive & Industrial Interchange Couplers and Plugs	20
1/2" & 3/8" Body Automotive & Industrial Interchange Couplers and Plugs	21
1/4" Body ARO Series Couplers and Plugs	22
1/4" Body Lincoln Series Couplers and Plugs	23
Jack Hammer Universal Twist-Lock Fittings	24
1/4", 3/8", and 1/2" Body Straight Through Couplers and Plugs	25
1/4" Body Diamond "U" Series Couplers and Plugs	26
<b>Fittings</b>	
Hose Barb Splicer / Solid (Male / Female)	27 - 28
Hose Barb Swivel (Male / Female)	28
Specialty Barb Fitting	28
Countersink / Hex Plugs (Brass / Steel)	29
Brass Pipe Fittings (Hex Adapter, Bushings, Reducers, Nipples)	29
Brass Pipe Fittings (Couplings, Face Bushing)	30
Street Pipe Fittings (Elbow, Tees)	30
Red Brass Pipe Fittings (Elbow, Couplings, Cap, Nipples, Bushings)	31
Brass Compression Fittings (Adapters, Caps, Inserts, Elbows, Nuts, Unions, Sleeves)	31 - 32
Brass / Aluminum Manifolds (Dome, Round, Rectangle, Cross, Tee)	33
Brass / Steel Manifold Kits	34 - 36
Swivel Fittings	37
 <b>AQUAGEN</b>	
Nozzles	38
<b>FIRE SAFE</b>	
Fire Prevention Equipment	39
<b>Blowguns and Tips</b>	
Blowgun Air Flow Data	40
Safety Blowguns	41
Heavy Duty Blowguns; Standard & Specialty Blowguns	42 - 43
Standard & Specialty Blowguns; Inflators / Air Nozzles	44 - 45
Tips and Accessories	46 - 47
<b>Straight Hoses</b>	
PVC Hoses	48
Garden / Water Hoses	49
Garden / Water Hose Fittings	50
Polyurethane Hoses	51
<b>Recoil Hoses</b>	
Polyurethane Recoil Hoses	52 - 53
Hybrid Polymer Hoses	54
Rhino Rubber Hoses	55
Rubber Hose Whips	55
Jack Hammer Hoses & Fittings	56
<b>Retractable Hose Reels</b>	
Professional Grade Hose Reel	57
Heavy Duty Hose Reel	57
Hose Reel Parts & Accessories	58
Gas Welding Hoses & Hose Reels	59
Hose Accessory & Repair Parts	60
<b>Hose Repair</b>	
Reusable Brass Fittings	61



## Products

## Page #

### Hose Crimpers

Crimping Tools (Straight Hammer, V-Grip)	62 - 63
Hydraulic Crimper	64
Boot Clamp Crimper	64
Ratchet Style Center Punch Crimper	64
Strapping & Bending Tool	64
Brass Ferrules	65
Crimper / Ferrules / Hose Repair Kits	66 - 67
Hose Clamps / Double Ear Clamps / Band Clamps	68 - 69

### Valves

Pressure Relief Valves, Ball Valves, In-Line Bleed Valves, Auto Drain Valves, Air Tank Drain Valves	70
Mini Ball Valve / 2-Way Lever Valves / Drain-Cock Valves	71
Mini Drain / Button Valves / In-Line Needle Valves / Tank Valves	72
Bleeder Valves / Check Valves / Slide Valve	73
Foot Pedal Valves	74

### Pressure Gauges

All Purpose Dry Pressure Gauges	75
Oil Filled Pressure Gauges	76
Water Pressure Gauges, Digital Tire Pressure Gauge	76
CO <sub>2</sub> Pressure Gauges, Gas Test Pressure Gauge	76

### Tire Pressure Gauges

Tire Chucks	77 - 78
Air Vending Machine Accessories	79
Tire Inflator Gauges	80 - 81
Digital Tire inflator & Pressure Gauge	82
Tire Chucks with Dial Pressure Gauges	83

### Tire Repair Tools

Tire Valve Stem Core Tools	84
Tire Thread Depth Gauge	84

### Air Tool Accessory Kits

16 Pcs & 17 Pcs Accessory Kits (Professional Grade)	85
16 Pcs & 17 Pcs Accessory Kits (Economy Line)	86

### Filter, Regulator, and Lubricator

Filter, Regulator, Lubricator Technical Data	87
Filters	88 - 89
Regulators	90 - 92
Lubricators	93 - 94
Filter, Regulator, Lubricator Combo Unit	95 - 97
Filter, Regulator, Lubricator Replacement Parts	98 - 101
CO <sub>2</sub> Regulator / Kits / Accessories	102 - 103
CO <sub>2</sub> Fittings	104

### Air Tools & Compressors Oil / Thread Locker

Air Tool Oil / Winter Grade Air Tool Oil	105
Compressor Oil (20 Wt. / 30 Wt.)	106
Synthetic, Pressure Washer Oil	107
Thread Lockers	108

### Compressor Parts & Components

Replacement Compressor Pressure Switches	109
Compressors Air Intake Filters	110 - 111
Starting & Running Capacitors	112
Air Compressor Spare Parts (Rubber Feets, Dipstick, Tubes, Valves and Strainer)	113 - 116

### Pressure Washer

Pressure Washer Spray Guns	117
Gasoline Engine, Axial / Triplex Pump	118
Hoses, Hose Reels	119
Nozzles, Nozzle Tip Set	120 - 121
Surface Cleaners, Sand Blasters	122
Couplers, Plugs, Filters, Valves, Gauges, Adapters, Switch and Accessories	123 - 126

### PTFE Sealing Tapes

127

### Commercial Grade Rags & Towels

128



## COUPLERS

INTERSTATE	AMFLO	ARO	CAMEL	COILHOSE	FOSTER	HANSEN	MILTON	PARKER	SCHRADER	TRU-FLATE
CA440B	C2B	TFCF22	61-523	160*	TF3003	B21QS-25F	785	B13	3504	13-134
CA441B	C1B	TFCM22	61-524	162*	TF3103	B21QS-25M	786	B12	2503	13-124
CA443B	C2-42B		61-522	163*	TF3603	B21QS-25H	786-4	B10-3B		
CA445B	C2-42L*			163L*	TF1513	B21QS-25HP	1786-4	B103BP		
CA460B	C2-23B			161*	TF3203	B21QS-37F		B13-E		
CA461B	C1-03B			165*	TF3303	B21QS-27M		B12-E		
CA463B	C2-44B	TFCH23	61-525	166*	TF3703	B21QS-37H	485-6	B10-5B		
CA465B	C2-44L*			166L*	TF1713	B21DS-37HP	1765-6	B10-5BP		
CA640Z	C8		61-476	592	TF4004		1803	15C	3521	13-610
CA641Z	C7		61-478	593	TF4104			14C	3516	13-602
CA660Z	C6		61-553	590	TF4204		1805	15	3515	13-612
CA661Z	C5		61-554	591	TF4304		1806	14		13-604
CA663Z	C6-44			598	TF4804		1806-6	14-5B		
CA665Z	C6-44L			598L	TF1714		1746-6	14-5BP		
CG440B	C60*			150U		23AS-25F		UC304F-4		
CG441B	C61*			152U		23AS-25M		UC304M-4		
CH440B	C20B	23102-220	61-573	150	3003*	B22QS-25F	715	B23	5142-12	13-234
CH441B	C21B	23102-212	61-574	152	3103*	B22QS-25M	716	B22	5141-12	13-224
CH443B	C20-42B	23102-22	61-575	153	3603*	B22QS-25H	717	B20-3B		
CH445B	C20-42L*			153L	1513*	B22QS-25HP	1717-4	B20-3BP		
CH460B	C20-23B	23102-3	61-103	151	3203*	B22QS-37F	718	B23E	5363-12	
CH461B	C21-03B	23102-213	61-101	155	3303*	B22QS-97M	719	B22E	5140-12	
CH463B	C20-44B			156	3703*	B22QS-37H	717-5	820-5B		
CH465B	C20-44L*			156L	1713*	B22QS-37HP	1717-6*	B20-5BP		
CH640	C26-22	23103-002	61-112	582	4004*	400	1833	25C		
CH641	C25-02	23102-210	61-110	583	4104*	410		24C		
CH660	C26	23103-300	61-482	580	4204*	420	1835	25	3541	13-356
CH661	C25	23103-313	61-483	581	4304*	430	1836	24		13-526
CH663	C26-44	23103-324		586	4804*	4006	1836-6	24-5B		
CH665	C26-44L				1714*	520	1795-6	24-5BP		
CH880	C10		61-563	120	5205*	530	1815	17	3512	13-712
CH881	C9	23104-014	61-564	121	5303*		1816	16	3511	13-704
CL440B	C28*		61-548	170	LN3003*		790*	B73		13-434
CL441B	C27*		61-486	172	LN3103*			B72		13-424
CNV440B	CST4B		61-306					BST-2		
C0440B	C38B	210	61-526	140	210-3003*	20AS-25F	775*	B53	3526	13-334
C0441B	C37B		61-527	142	210-3103*	20AS-25M		B52	3525	13-324

\* Indicates coupler is not for all brass construction

## PLUGS

CPA440	CP2	TFPF22	61-539	1602	TF11	21AP-25F	764	3C	3507	12-134
CPA441	CP1	TFFM22	61-538	1601	TF10	21AP-25M	783	2C	3506	12-124
CPA443	CP1-42	THPH22	61-540	1606	TF16	21AP-25H	783-4	8C		12-164
CPA445	CP1-42L			1606L	TF51		1783-4	8CP		
CPA460	CP2-23	TFPF23	61-150	1605	TF15	21AP-37F		3C-E		
CPA461	CP1-03	TFPH23	61-541	1603	TF14	21AP-37M		2C-E		
CPA463	CP1-44			1608	TF17	21AP-97H	783-6	9C		
CPA465	CP1-44L		61-481	1608L	TF71		1783-6	9CP		
CPA640	CP8		61-541	5904	TF41		1810	1E	3520	12-610
CPA641	CP7		61-559	5903	TF40		1809	0E	3519	12-602
CPA660	CP6		61-558	5902	TF43		1808	3E	3518	12-612
CPA680	CP6-24									
CPA661	CP5			5901	TF42		1807	2E	3517	12-604
CPA563	CP5-44			5906	TF48		1807-6	5E		
CPA665	CP5-44L			5906L			1747-6	5EP		
CPH440	CP20	23902-200	61-579	1502	11-3	11	728	H3C	5139-11	12-234
CPH441	CP21	23902-210	61-578	1501	10-3	10	727	H2C	5138-11	12-224
CPH443	CP21-42	23902-220		1506	16-3	16	736	H8C		12-225
CPH445	CP21-42L			1506L	51-3		1735-4	H8CP		
CPH460	CP20-23	23902-3	61-107	1505	15-3	15	732	H3C-E	5263-11	
CPH461	CP21-03	23902-310	61-535	1503	14-3	14	733	H2C-E		
CPH463	CP21-44			1508	17-3	17	736-6	H9C		
CPH465	CP21-44L			1508L	71-3		1736-6	H9CP		
CPH640	CP26-22	23903-002	61-119	5804	41-3	41	1840	H1E		
CPH641	CP25-02	23902-210	61-117	5803	40-4	40	1839	H0E		
CPH660	CP26	23903-300	61-485	5802	43-4	43	1838	H3E	3543	12-536
CPH661	CP25	23903-310	61-484	5801	42-4	42	1837	H2E	3542	12-526
CPH663	CP25-44	23903-420		5806	48-4	406	1837-6	H5E		
CPH665	CP25-44L			5806L	71-4		1797-6	H5EP		
CPH880	CP18	23904-400	61-137	1202	55-5	55	1858	H3F		12-762
CPH881	CP17	23904-410	31-134	1201	54-5	54	1857	H2F		12-752
CPL440	CP28	LNPF22	61-551	1702	LN11		792	L3C	3532	12-434
CPL441	CPA27	LNP22	61-550	1701	LN10		791	L2C	3531	12-424
CPNV440	CPST4		61-307					ST-N2		
CP0440	CP38	2609	61-529	1402	210-11	20AP-25F	778	A3C	3530	12-334
CP0441	CP37	2608	61-528	1401	210-10	20AP-25M	777	A2C	3529	12-324



## STANDARD SLEEVE QUICK DISCONNECT COUPLERS


**COUPLER DESIGN:** Sleeve couplers are the most reliable means of joining pneumatic and fluid transfer lines. They have a compact design that uses a ball-locking mechanism consisting of captive steel balls that engage the locking groove on the mating plug. The sliding spring loaded sleeve on the coupler must be manually retracted in order to connect or disconnect the plug.

**INTERCHANGEABILITY:** Sleeve couplers are manufactured to ensure interchangeability with other manufacturer's couplers and plugs (see comparison charts on page 5). The following standard interchanges are available: Industrial interchange (Hansen®) series, Automotive (Tru-Flate®) series, ARO® series, Lincoln® series, Diamond-U®, and the Straight through (No-valve) series.

**VARIABLE SIZES:** Available body sizes range from 1/4" through 1/2". The 1/4" couplers are machined from steel or brass bar stock. The 3/8" and 1/2" couplers are machined from steel bar stock. End terminations are available in both male and female pipe threads, standard and easy-lock hose barb connections. Usually for 1/4", 3/8" and 1/2" couplers each have 4, 6 and 8 locking balls respectively. The model number ending in letter the "B" features Brass construction, while others are made of Capital Steel.

## FEATURES:

## TYPICAL CUTAWAYS FOR COUPLER AND PLUG

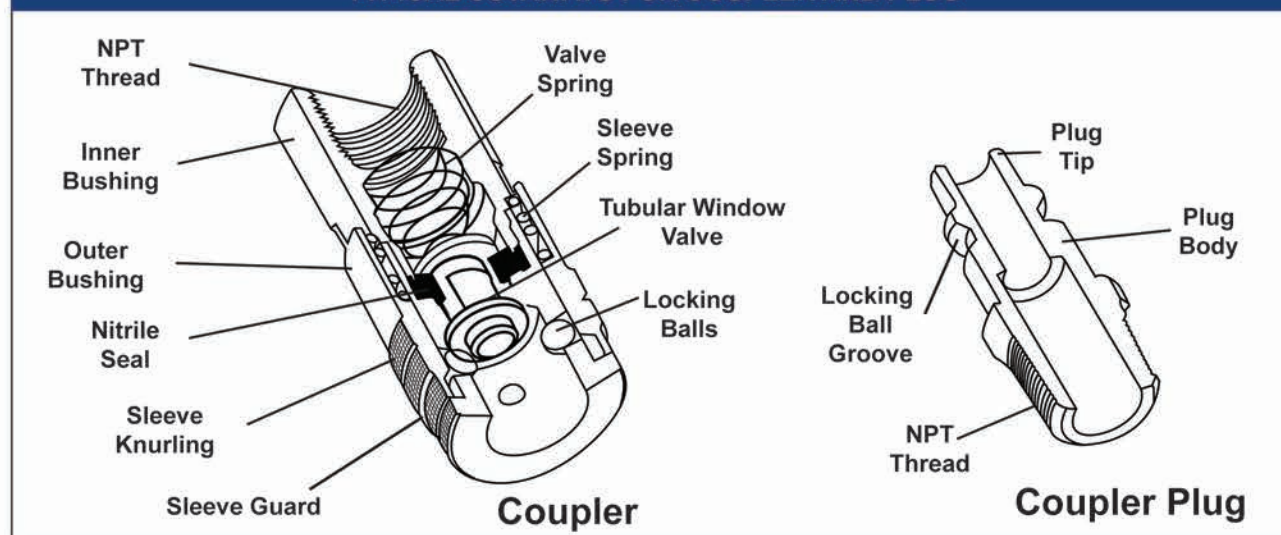

- 1) Plugs are plated non-capitalized steel with hardened wear points. Precision-machined bar stock construction provides resistance to the effects of mechanical shock in rugged applications.
- 2) The tubular valve design with large window flow passages delivers high flow with minimal pressure drop. This valve design provides 360-degree support to both the valve seal and the mating nipple.
- 3) Seals, molded from Buna-N (Nitrile), form a "Bubble Tight" seal for reliable operation within rated working pressure.
- 4) The locking ball mechanism is a proven design with hardened steel balls for long wear and accurate alignment of the coupler and plug. The 1/4" couplers have 4 locking balls and 3/8" and 1/2" couplers have 8 locking balls evenly spaced to distribute the load and reduce wear.
- 5) The sleeve guard is machined into the body to protect the sleeve and resist accidental disconnects.
- 6) The sleeve knurling and grooves provide a gripping surface for ease of operation.
- 7) The low-tolerance machining of the locking ball cage allows the precise placement of locking balls inside the groove of the plug.

Quick Disconnect Couplers and Plugs are the fastest, easiest, and most reliable means of connecting air and low-pressure fluid lines.

Common applications include compressed air, water, grease, paint, limited vacuum, and limited compressed gas applications.

**WARNING:** The quick disconnect couplers and plugs in this catalog are intended for use on compressed air and fluid transfer lines and have a maximum working pressure of 300 PSI.



**1/4" BRASS & STEEL BODY INDUSTRIAL INTERCHANGE (HANSEN®) COUPLER PLUGS**

**Interstate Pneumatics** Industrial Interchange series Quick Disconnect Couplers and Plugs are manufactured to conform with MIL-C41 09 and ANSI/(NFPA) T3.20.1 4-1990 requirements and are interchangeable with Industrial Interchange Couplers and Plugs produced by other manufacturers. Precision machined construction provides resistance to the effects of mechanical shock in rugged applications. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Yellow Zinc plated	Brass/Steel Zinc plated	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

Following is the list of available models along with the thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CH420B</b> Brass	1/8"		<b>CH421B</b> Brass	1/8"
	<b>CH440</b> Steel	1/4"		<b>CH441</b> Steel	1/4"
	<b>CH440B</b> Brass	1/4"		<b>CH441B</b> Brass	1/4"
	<b>CH440BS</b> Narrow profile 6 bearing design Brass	1/4"		<b>CH441BS</b> Narrow profile 6 bearing design Brass	1/4"
	<b>CH440BP</b> Low profile 3 bearing design Brass	1/4"		<b>CH441BP</b> Low profile 3 bearing design Brass	1/4"
	<b>CH460B</b> Brass	3/8"		<b>CH461B</b> Brass	3/8"
END FITTING (BARB)	MODEL	BARB SIZE	END FITTING (EASY-LOCK)	MODEL	BARB SIZE
	<b>CH443B</b> Brass	1/4"		<b>CH445B</b> Brass	1/4"
	<b>CH463B</b> Brass	3/8"		<b>CH465B</b> Brass	3/8"
				<b>CH465</b> Steel	3/8"
REUSABLE REPAIR COUPLER	MODEL	SIZE			
	<b>CHZ44-0</b> Brass	1/4" x 1/4"			

All of the coupler plugs pictured on the next page have the same body plug size and configuration, designed to precision fit all of the above couplers. The 1/4" body size Industrial Interchange series Coupler Plugs can be used with the **Interstate Pneumatic** Universal Couplers.



### 1/4" BRASS & STEEL BODY YELLOW ZINC PLATED INDUSTRIAL INTERCHANGE (HANSEN®) COUPLER PLUGS

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CPH420</b> Steel	1/8"		<b>CPH421</b> Steel	1/8"
	<b>CPH440</b> Steel	1/4"		<b>CPH441</b> Steel	1/4"
	<b>CPH440B</b> Brass	1/4"		<b>CPH441B</b> Brass	1/4"
	<b>CPH460</b> Steel	3/8"		<b>CPH461</b> Steel	3/8"
END FITTING (EASY-LOCK)	MODEL	BARB SIZE	END FITTING (BARB)	MODEL	BARB SIZE
	<b>CPH445</b> Steel	1/4"		<b>CPH443</b> Steel	1/4"
	<b>CPH465</b> Steel	3/8"		<b>CPH463</b> Steel	3/8"
SWIVEL PLUGS	MODEL	NPT SIZE	REUSABLE REPAIR PLUG	MODEL	SIZE
	<b>CPHS441</b> Steel	1/4" MPT		<b>CPHZ44-0</b> Brass	1/4" x 1/4"
	<b>CPHS461</b> Steel	3/8" MPT			



**3/8" BODY STEEL INDUSTRIAL INTERCHANGE (HANSEN®) COUPLERS & PLUGS**

Interstate Pneumatic industrial interchange series quick disconnect couplers and plugs are manufactured to conform with MIL-C4109 and ANSI/(NFPA) T3.20.14-1990 requirements, and are interchangeable with industrial interchange couplers and plugs produced by other manufacturers. These couplers are identified by 2 narrow grooves on sleeve. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Yellow Zinc plated	Steel Zinc plated	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

Following is the list of available models along with thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CH640</b> Steel	1/4"		<b>CH641</b> Steel	1/4"
	<b>CH660</b> Steel	3/8"		<b>CH661</b> Steel	3/8"
	<b>CH680</b> Steel	1/2"		<b>CH681</b> Steel	1/2"
END FITTING (BARB)	MODEL	BARB SIZE	END FITTING (EASY-LOCK)	MODEL	BARB SIZE
	<b>CH663</b> Steel	3/8"		<b>CH665</b> Steel	3/8"
	<b>CH683</b> Yellow Steel	1/2"			

All of the coupler plugs pictured below have the same body size and configuration, designed to precision fit all of the above couplers.

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CPH640</b> Steel	1/4"		<b>CPH641</b> Steel	1/4"
	<b>CPH660</b> Steel	3/8"		<b>CPH661</b> Steel	3/8"
	<b>CPH680</b> Steel	1/2"		<b>CPH661</b> Steel	1/2"
END FITTING (BARB)	MODEL	BARB SIZE	SWIVEL PLUGS	MODEL	NPT SIZE
	<b>CPH663</b> Steel	3/8"		<b>CPHS641</b> Steel	1/4" MPT
END FITTING (EASY-LOCK)	MODEL	BARB SIZE		<b>CPHS661</b> Steel	3/8" MPT
	<b>CPH665</b> Steel	3/8"			



### 1/4" BODY BRASS & STEEL (SILVER ZINC) AUTOMOTIVE STANDARD (TRU-FLATE) COUPLERS & PLUGS

**Interstate Pneumatics** Automotive Standard series Quick Disconnect Couplers and Plugs are interchangeable with the Automotive Standard series Couplers and Plugs produced by other manufacturers. Precision machined bar stock construction provides resistance to the effects of mechanical shock in rugged applications. Usually, for this series, Brass Couplers are identified having 1 wide groove, whereas steel having 1 wide & 1 narrow groove on the sleeve. Maximum working pressure 300 PSI.

#### SALIENT FEATURES:

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Black Zinc plated	Brass/Steel Black Zinc plated	Steel Hardened & Black Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

Following is the list of available models along with thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CA440B</b> Brass	1/4"		<b>CA441B</b> Brass	1/4"
	<b>CA440Z</b> Steel (Silver)	1/4"		<b>CA441Z</b> Steel (Silver)	1/4"
	<b>CA460B</b> Brass	3/8"		<b>CA461B</b> Brass	3/8"
END FITTING (BARB)	MODEL	BARB SIZE	END FITTING (EASY-LOCK)	MODEL	BARB SIZE
	<b>CA443B</b> Brass	1/4"		<b>CA445B</b> Brass	1/4"
	<b>CA463B</b> Brass	3/8"		<b>CA465B</b> Brass	3/8"

All of the coupler plugs pictured below have the same body plug size and configuration, designed to precision fit all of the above couplers. The 1/4" body size Automotive Standard series Coupler Plugs can be used with the **Interstate Pneumatics** Universal Couplers shown on page 15 of this catalog.



END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPA420Z**  
Steel (Silver)

1/8"



**CPA440Z**  
Steel (Silver)

1/4"



**CPA460Z**  
Steel (Silver)

3/8"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPA421Z**  
Steel (Silver)

1/8"



**CPA441Z**  
Steel (Silver)

1/4"



**CPA461Z**  
Steel (Silver)

3/8"

END FITTING (BARB)	MODEL	BARB SIZE
--------------------	-------	-----------



**CPA443**  
Steel

1/4"



**CPA463Z**  
Steel (Silver)

3/8"

END FITTING (EASY-LOCK)	MODEL	BARB SIZE
-------------------------	-------	-----------



**CPA445**  
Steel

1/4"



**CPA465Z**  
Steel (Silver)

3/8"



**1/4" & 3/8" BODY STEEL AUTOMOTIVE SERIES SWIVEL PLUGS****1/4" BODY SWIVEL PLUG    MODEL    NPT SIZE****CPAS441****1/4" MPT****3/8" BODY SWIVEL PLUG    MODEL    NPT SIZE****CPAS641****1/4" MPT****RECAPPER PLUG    MODEL    NPT SIZE****CPA4VT2****1/4" FPT****1/4" BODY SWIVEL PLUG    MODEL    NPT SIZE****CPAS461****3/8" MPT****RECAPPER PLUG    MODEL    NPT SIZE****CPA4VT2L**  
Longer Version  
50mm Length**1/4" FPT****1/4" & 3/8" BODY AUTOMOTIVE COUPLER & PLUG KITS****MODEL    DESCRIPTION****CKA4**

1/4" Automotive Coupler &amp; Plug (Installed CPA441 &amp; CA440)

**CKA6**

3/8" Automotive Coupler &amp; Plug (Installed CPA641 &amp; CA640)

**CA466-D**3/8" Automotive Steel Body x 1/4" FNPT Plug - CPA640 (1)  
3/8" Automotive Steel Body x 1/4" MNPT Plugs - CPA641 (2)  
3/8" Automotive Steel Body x 1/4" FNPT Coupler - CA640 (1)**C466**3/8" Automotive Brass Body x 1/4" FNPT Coupler - (1)  
1/4" Automotive Steel Body x 1/4" MNPT Plugs - (2)  
1/4" Automotive Steel Body x 1/4" FNPT Plug - (1)**1/4" & 3/8" BODY INDUSTRIAL COUPLER & PLUG KITS****MODEL    DESCRIPTION****CKH4**

1/4" Industrial Coupler &amp; Plug (Installed CPH441 &amp; CH440)

**CKH6**

3/8" Industrial Coupler &amp; Plug (Installed CPH641 &amp; CH640)

**CH466-D**3/8" Industrial Steel Body x 1/4" FNPT Plug - CPH640 (1)  
3/8" Industrial Steel Body x 1/4" MNPT Plugs - CPH641 (2)  
3/8" Industrial Steel Body x 1/4" FNPT Coupler - CH640 (1)**C344**1/4" Industrial Brass Body Coupler x 1/4" FNPT - CH440B (1)  
1/4" Industrial Steel Body Male x 1/4" NPT - CPH441 (1)  
1/4" Industrial Steel Body Female x 1/4" NPT - CPH440 (1)**C744**1/4" Industrial Steel Body Coupler Male x 1/4" NPT - CH441 (1)  
1/4" Industrial Steel Body Coupler Female x 1/4" NPT - CH440 (1)  
1/4" Industrial Steel Body Male x 1/4" NPT - CPH441 (2)  
1/4" Industrial Steel Body Female x 1/4" NPT - CPH440 (2)  
1/4" Steel Hex Nipple - FA414S (1)



### 3/8" BODY BRASS & STEEL (SILVER ZINC) AUTOMOTIVE STANDARD (TRU-FLATE) COUPLERS & PLUGS

**Interstate Pneumatics** Automotive Standard series Quick Disconnect Couplers and Plugs are interchangeable with Automotive and Industrial Standard series couplers and plugs produced by other manufacturers. These couplers are identified by 1 wide groove on the sleeve regardless of end fitting. Almost all couplers & plugs in this series are machined from steel. Maximum working pressure 300 PSI.

#### SALIENT FEATURES:

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Black plated	Steel Black plated	Steel Hardened & Black plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	65 - 67	-40°F to +212°F

Following is the list of available models along with thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------	-------------------	-------	----------



**CA640Z**  
Steel (Silver)

1/4"



**CA641Z**  
Steel (Silver)

1/4"



**CA660Z**  
Steel (Silver)

3/8"



**CA661Z**  
Steel (Silver)

3/8"

END FITTING (BARB)	MODEL	BARB SIZE	END FITTING (EASY-LOCK)	MODEL	BARB SIZE
--------------------	-------	-----------	-------------------------	-------	-----------



**CA663Z**  
Steel (Silver)

3/8"



**CA665Z**  
Steel (Silver)

3/8"


All of the coupler plugs pictured below have the same body size and designed to precision fit all of the above couplers. **Interstate Pneumatics** Automotive series Quick Disconnect Couplers are interchangeable with both Automotive and Industrial Plugs.




END FITTING (FPT)	MODEL	NPT SIZE
	<b>CPA640Z</b> Steel (Silver)	1/4"
	<b>CPA660Z</b> Steel (Silver)	3/8"
	<b>CPA680</b> Steel (Silver)	1/2"

END FITTING (MPT)	MODEL	NPT SIZE
	<b>CPA641Z</b> Steel (Silver)	1/4"
	<b>CPA661Z</b> Steel (Silver)	3/8"
	<b>CPA681</b> Steel (Silver)	1/2"

END FITTING (BARB)	MODEL	BARB SIZE
	<b>CPA643</b> Steel (Silver)	1/4"
	<b>CPA663</b> Steel (Silver)	3/8"


END FITTING (EASY-LOCK)	MODEL	BARB SIZE
	<b>CPA665Z</b> Steel (Silver)	3/8"

SWIVEL PLUGS	MODEL	NPT SIZE
	<b>CPAS641</b>	1/4" MPT



**3/8" YELLOW ZINC PLATED STEEL BODY INDUSTRIAL COUPLER PLUGS**

**Interstate Pneumatics** Industrial series Quick Disconnect Coupler Plugs are interchangeable with couplers from other manufacturers.

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CPH640</b> Steel	1/4"		<b>CPH641</b> Steel	1/4"
	<b>CPH660</b> Steel	3/8"		<b>CPH661</b> Steel	3/8"
	<b>CPH680</b> Steel	1/2"		<b>CPH681</b> Steel	1/2"
END FITTING (BARB)	MODEL	BARB SIZE	END FITTING (EASY-LOCK)	MODEL	BARB SIZE
	<b>CPH663</b> Steel	3/8"		<b>CPH665</b> Steel	3/8"
SWIVEL PLUGS	MODEL	NPT SIZE			
	<b>CPHS641</b> Steel	1/4" MPT			
	<b>CPHS661</b> Steel	3/8" MPT			








**1/4" BODY AUTOMATIC 3-IN-1 UNIVERSAL COUPLERS (BRASS/STEEL)**

**Interstate Pneumatics** Universal Couplers accept 1/4" body Industrial Interchange (Hansen®), Automotive Standard (Tru-Flate®), & ARO® series Coupler Plugs. The 1/4" Universal Coupler is precision machined from bar stock and is available both in brass & steel. The design of this coupler incorporates push-to-connect operation, a machined High-Flow "Window Valve" and a sleeve guard which prevents accidental disconnects and protects the sleeve from damage. **Interstate Pneumatics** Universal Couplers are available with 1/4" NPT male or female connections. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Zinc plated	Brass/Steel Zinc plated	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

To extend service life, keep couplers clean & lubricated. Interstate Pneumatics Air Tool Oil a 10 weight non-detergent part # YL#12-004 is ideal for this purpose.

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CG440</b> Steel	1/4"		<b>CG441</b> Steel	1/4"
	<b>CG440B</b> Brass	1/4"		<b>CG441B</b> Brass	1/4"
	<b>CG440PB</b> Body: Aluminum Sleeve: Plastic	1/4"		<b>CG441PB</b> Body: Aluminum Sleeve: Plastic	1/4"
	<b>CG440BP</b> Brass	1/4"			

**SAFETY EXHAUST COUPLERS**

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (FPT)	MODEL	NPT SIZE
	<b>CG440-5B</b> Steel (Blue)	1/4"		<b>CG440-5O</b> Steel (Orange)	1/4"

UNIVERSAL COUPLERS ACCEPT INDUSTRIAL, AUTOMOTIVE AND ARO SERIES PLUGS SHOWN BELOW.

  
1/4" Industrial Series (Hansen)



  
1/4" ARO Series



  
1/4" Automotive Series Tru-Flate





**3/8" BODY AUTOMATIC 3-IN-1 UNIVERSAL COUPLERS (STEEL)**

**Interstate Pneumatics** Universal Couplers accept 3/8" body Industrial Interchange (Hansen®), Automotive Standard (Tru-Flate®), and ARO® series Coupler Plugs. The 3/8" Universal Coupler is precision machined from bar stock. The design of this coupler incorporates push-to-connect operation, a machined High-Flow "Window Valve" and a sleeve guard which prevents accidental disconnects and protects the sleeve from damage. **Interstate Pneumatics** Universal Couplers are available with 3/8" NPT male or female connections. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Zinc plated	Steel Zinc plated	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	65 - 67	-40°F to +212°F

To extend service life, keep couplers clean & lubricated. **Interstate Pneumatics** Air Tool Oil a 10 weight non-detergent part # YL#12-004 is ideal for this purpose.

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CG660</b> Steel	3/8"		<b>CG661</b> Steel	3/8"

**ACCEPTS INDUSTRIAL, AUTOMOTIVE AND ARO SERIES PLUGS**  
Universal Couplers shown above accept all of the plugs shown below.



**3/8" Industrial Series  
(Hansen-Interchange)**



**3/8" Automotive Series  
Tru-Flate**





**INTERSTATE PNEUMATICS** Easy-Lock Fittings are designed for use with Easy-Lock Hose. The special design of the barb allows it to be secured to Easy-Lock or equivalent hose without using ferrules or hose clamps.

### SOLID FEMALE BARB CONNECTOR



Model #	Sizes
<b>FL044</b>	1/4" FPT X 1/4" Barb
<b>FL046</b>	1/4" FPT X 3/8" Barb
<b>FL066</b>	3/8" FPT X 3/8" Barb

### SWIVEL FEMALE BARB CONNECTOR



Model #	Sizes
<b>FL244</b>	1/4" FPT X 1/4" Barb
<b>FL266</b>	3/8" FPT X 3/8" Barb

### SOLID MALE BARB CONNECTOR



Model #	Sizes
<b>FL144</b>	1/4" MPT X 1/4" Barb
<b>FL146</b>	1/4" MPT X 3/8" Barb
<b>FL166</b>	3/8" MPT X 3/8" Barb
<b>FL188</b>	1/2" MPT X 1/2" Barb

### HOSE BARB SPLICER



Model #	Barb Sizes
<b>FL344</b>	1/4"
<b>FL366</b>	3/8"

### INDUSTRIAL EASY LOCK COUPLERS AND PLUGS

#### END FITTING (EASY-LOCK)

#### MODEL

#### SIZE



<b>CPH445</b>	1/4" Plug
Steel	1/4" Barb
<b>CPH465</b>	1/4" Plug
Steel	3/8" Barb
<b>CPH665</b>	3/8" Plug
Steel	3/8" Barb

#### END FITTING (EASY-LOCK)

#### MODEL

#### SIZE



<b>CH445B</b>	1/4" Coupler
Brass	1/4" Barb
<b>CH465B</b>	1/4" Coupler
Brass	3/8" Barb
<b>CH465</b>	1/4" Coupler
Steel	3/8" Barb
<b>CH665</b>	3/8" Coupler
Steel	3/8" Barb

### AUTOMOTIVE EASY LOCK COUPLERS AND PLUGS

#### END FITTING (EASY-LOCK)

#### MODEL

#### SIZE



<b>CA445B</b>	1/4" Coupler
Brass	1/4" Barb
<b>CA465B</b>	1/4" Coupler
Brass	3/8" Barb
<b>CA665B</b>	3/8" Coupler
Brass	3/8" Barb

**WARNING:** Easy-Lock Fittings are designed to be used only with Easy-Lock hose (or equivalent "Lock-On" type hose).



### 1/4" & 3/8" BODY STEEL INDUSTRIAL INTERCHANGE (HANSEN) SERIES SWIVEL PLUGS

Interstate Pneumatics offers a full line of Industrial Swivel Plugs that fit all Industry Standard, Industrial and Universal Couplers. These plugs are precision machined and use a rubber O-ring seal.

#### 1/4" BODY SWIVEL PLUG MODEL NPT SIZE



**CPHS441**  
Steel 1/4" MPT

#### 1/4" BODY SWIVEL PLUG MODEL NPT SIZE



**CPHS461**  
Steel 3/8" MPT

#### 3/8" BODY SWIVEL PLUG MODEL NPT SIZE



**CPHS641**  
Steel 1/4" MPT

#### 3/8" BODY SWIVEL PLUG MODEL NPT SIZE



**CPHS661**  
Steel 3/8" MPT

### 1/4" & 3/8" BODY STEEL AUTOMOTIVE SERIES SWIVEL PLUGS

#### 1/4" BODY SWIVEL PLUG MODEL NPT SIZE



**CPAS441** 1/4" MPT

#### 1/4" BODY SWIVEL PLUG MODEL NPT SIZE



**CPAS461** 3/8" MPT

#### 3/8" BODY SWIVEL PLUG MODEL NPT SIZE



**CPAS641** 1/4" MPT



### 1/2" YELLOW ZINC PLATED BODY AUTOMOTIVE & INDUSTRIAL INTERCHANGE COUPLERS & PLUGS

**INTERSTATE PNEUMATICS** Automotive & Industrial interchange series quick disconnect couplers and plugs are manufactured to conform with MIL-C4109 and ANSI/(NFPA) T3.20.14-1990 requirements, and are interchangeable with Automotive & Industrial interchange couplers and plugs produced by other manufacturers. These couplers are identified by 2 narrow grooves on sleeve. Maximum working pressure 250 PSI.

#### SALIENT FEATURES:

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Zinc plated	Steel Zinc plated	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	170 - 185	-40°F to +212°F

Following is the list of available models along with the thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CA880Z**  
Silver

1/2"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CA881Z**  
Silver

1/2"

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CH860**  
Industrial  
Steel

3/8"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CH861**  
Industrial  
Steel

3/8"

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CH880**  
Industrial  
Steel

1/2"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CH881**  
Industrial  
Steel

1/2"

END FITTING (BARB)	MODEL	BARB SIZE
--------------------	-------	-----------



**CH883**  
Industrial  
Yellow  
Steel

1/2"

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPH880**  
Industrial  
Steel

1/2"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPH881**  
Industrial  
Steel

1/2"

END FITTING (BARB)	MODEL	BARB SIZE
--------------------	-------	-----------



**CPH883**  
Industrial  
Yellow  
Steel

1/2"



**1/2" & 3/8" AUTOMOTIVE & INDUSTRIAL INTERCHANGE PLUGS**

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPA880Z**  
Automotive  
Steel (Silver)

1/2"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPA881Z**  
Automotive  
Steel (Silver)

1/2"

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPH860**  
Industrial  
Steel

3/8"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPH861**  
Industrial  
Steel

3/8"



**1/4" BODY ARO® SERIES COUPLERS & PLUGS**

**Interstate Pneumatics** ARO® series Quick Disconnect Couplers and Plugs are interchangeable with ARO® series Couplers and Plugs produced by other manufacturers. Precision machined bar stock construction provides resistance to the effects of mechanical shock in rugged applications. The 1/4" ARO® series Coupler Plugs can be used with **Interstate Pneumatics** Universal Couplers shown on page 15 of this catalog. 1/4" ARO® Couplers are identified by 3 narrow grooves on coupler's sleeve. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Zinc plated	Brass	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

Following is the list of available models along with thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CO440B</b> Brass	1/4"		<b>CO441B</b> Brass	1/4"
	<b>CPO440</b> Steel	1/4"		<b>CPO441</b> Steel	1/4"



**1/4" BODY LINCOLN® SERIES COUPLERS & PLUGS**

Interstate Pneumatics Lincoln® series Quick Disconnect Couplers and Plugs are interchangeable with Lincoln® series Couplers and Plugs produced by other manufacturers. Plugs are Zinc plated with hardened wear points. Precision machined bar stock construction provides resistance to the effects of mechanical shock in rugged applications. This Coupler series has unique identification with 1 wide & 2 narrow grooves on coupler sleeves. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Zinc plated	Brass	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

Following is the list of available models along with thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CL440B**  
Brass

1/4"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CL441B**  
Brass

1/4"

END FITTING (FPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPL440**  
Steel

1/4"

END FITTING (MPT)	MODEL	NPT SIZE
-------------------	-------	----------



**CPL441**  
Steel

1/4"



### JACK HAMMER UNIVERSAL TWIST LOCK FITTINGS

Cast carbon steel-zinc coated twist-lock fittings are normally threaded onto a pipe, threaded hose end or manifold which joins to a rubber hose assembly which is connected and disconnected regularly. Maximum working pressure 250 PSI.

#### STRAIGHT THROUGH FEMALE THREADED JACK HAMMER COUPLER



Model #	Sizes
<b>CU-800</b>	1/2" FPT
<b>CU-850</b>	3/4" FPT
<b>CU-900</b>	1" FPT

#### STRAIGHT THROUGH MALE THREADED JACK HAMMER COUPLER



Model #	Sizes
<b>CU-801</b>	1/2" MPT
<b>CU-851</b>	3/4" MPT
<b>CU-901</b>	1" MPT

#### STRAIGHT THROUGH HOSE BARB JACK HAMMER COUPLER



Model #	Sizes
<b>CU-803</b>	1/2" Hose Barb
<b>CU-853</b>	3/4" Hose Barb
<b>CU-903</b>	1" Hose Barb

#### JACK HAMMER UNIVERSAL COUPLING WITH TRIPPLE CONNECTIONS



Model #	Sizes
<b>CU-905</b>	1/2" NPT

### JACK HAMMER HOSE SAFETY CABLE



Model #	Sizes
<b>CU-SC2014</b>	1/2" to 1-1/4" Hose ID, 1/8" Steel Double Loop Cable 20" length
<b>CU-SC2414</b>	1-1/2" to 3" Hose ID, 1/4" Steel Double Loop Cable 24" length
<b>CU-SC3814</b>	1-1/2" to 3" Hose ID, 1/4" Steel Double Loop Cable 38" length

### JACK HAMMER HOSE CU COUPLER SAFETY PIN & RUBBER GASKET



Model #	Description
<b>CU-P</b>	Jack Hammer Hose Coupler Safety Pin



Model #	Description
<b>CU-R</b>	Jack Hammer Hose Coupler Rubber Gasket

### MISCELLANEOUS ACCESSORIES



Model#	Description
<b>Y90KR</b>	Quick Coupler Key Chain



## 1/4", 3/8", 1/2" BODY STRAIGHT THROUGH (NO VALVE) COUPLERS & PLUGS

**Interstate Pneumatics** Straight Through (No Valve) series Couplers and Plugs are designed for use in high flow applications. Smooth, straight through bore gives maximum flow with minimum pressure drop. Brass plugs are precision machined from solid brass bar stock.











Couplers are identified by 2 wide grooves on each end of couplers sleeve regardless of body size & end fitting. Applications include carpet cleaners, vacuum services & pressure washers.

### SALIENT FEATURES:

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	Temperature
Brass, Steel & Stainless Steel	Brass & Stainless Steel	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	-40°F to +212°F

**Note:** The SCFM for 1/4", 3/8" and 1/2" coupler body sizes are 35, 67, and 185 respectively

Following is the list of available models along with thread sizes:

END FITTING (FPT) MODEL	MAX PRESSURE	NPT SIZE	END FITTING (MPT) MODEL	MAX PRESSURE	NPT SIZE
<b>1/4" Body</b>					
	<b>CNV440B</b> (Brass)	2700 PSI		<b>CNV441B</b> (Brass)	2700 PSI
	<b>PW7135</b> (Stainless Steel)	5200 PSI		<b>PW7136</b> (Stainless Steel)	5200 PSI
	<b>CPNV440B</b> (Brass)	2700 PSI		<b>CPNV441B</b> (Brass)	2700 PSI
	<b>PW7132</b> (Steel)	5200 PSI		<b>PW7133</b> (Steel)	5200 PSI
	<b>PW7134</b> (Stainless Steel)	5200 PSI		<b>PW7137</b> (Stainless Steel)	5200 PSI
<b>3/8" Body</b>					
	<b>CNV660B</b> (Brass)	2700 PSI		<b>PW7152</b> (Brass)	2700 PSI
	<b>PW7144</b> (Stainless Steel)	5200 PSI		<b>PW7147</b> (Stainless Steel)	5200 PSI
	<b>CPNV660B</b> (Brass)	2700 PSI		<b>CPNV661B</b> (Brass)	2700 PSI
	<b>PW7142</b> (Steel)	5200 PSI		<b>PW7143</b> (Steel)	5200 PSI
	<b>PW7145</b> (Stainless Steel)	5200 PSI		<b>PW7146</b> (Stainless Steel)	5200 PSI
<b>1/2" Body</b>					
	<b>CNV880B</b>	2200 PSI			
	<b>CPNV880B</b>	2200 PSI			

**WARNING:** Straight Through Couplers and Plugs should not be connected or disconnected with pressure on the line.







**1/4" BODY DIAMOND "U"® SERIES COUPLERS & PLUGS**

**Interstate Pneumatics** Diamond "U"® series Couplers & Plugs are interchangeable with the Diamond "U" series Couplers & Plugs produced by other manufacturers. Precision machined bar stock construction provides resistance to the effect of mechanical shock in rugged applications. **Interstate Pneumatics** Diamond "U" series Plugs are Zinc plated with hardened wear points. Diamond series Couplers are identified by 1 wide and 2 narrow grooves placed equidistant on coupler's sleeve. Diamond "U" series Couplers and Plugs are mainly used in vacuum applications. Maximum working pressure 300 PSI.

**SALIENT FEATURES:**

Plug Body	Coupler Body	Sleeve	Springs	Locking Balls	Seals	SCFM @ 100 PSI	Temperature
Steel Hardened & Zinc plated	Steel Zinc plated	Steel Hardened & Zinc plated	AISI-301 Stainless Steel	AISI-E52100 Stainless Steel	Buna-N (Nitrile)	30 - 35	-40°F to +212°F

Following is the list of available models along with thread sizes:

END FITTING (FPT)	MODEL	NPT SIZE	END FITTING (MPT)	MODEL	NPT SIZE
	<b>CD440</b> Steel	1/4"		<b>CD441</b> Steel	1/4"
	<b>CPD440</b> Steel	1/4"		<b>CPD441</b> Steel	1/4"

**COUPLER REPAIR KIT**  
**FOR STANDARD SERIES 1/4" INDUSTRIAL & AUTOMOTIVE COUPLERS**
**C4RK****Includes:**

- Window-Port Check Valve
- Stainless Steel Valve Spring
- Valve Seat
- 4x Stainless Steel Ball Bearings



## HOSE BARB SPLICER



<b>FBS33</b>	3/16"
<b>FBS44</b>	1/4"
<b>FBS55</b>	5/16"
<b>FBS66</b>	3/8"
<b>FBS88</b>	1/2"
<b>7028156</b>	5/8"
<b>7028157</b>	3/4"

## HOSE BARB TEE, WYE, &amp; CROSS



**FBT44**  
Brass Tee Fitting  
1/4" Hose Barb Fitting



**FBY44**  
Brass Y Fitting  
1/4" Hose Barb Fitting



**FBX44**  
Brass Cross Fitting  
1/4" Hose Barb Fitting

## HOSE BARB X MALE (BRASS) - SOLID



## SOLID MALE

<b>FM22</b>	1/8" Barb x 1/8" MPT
<b>FM23</b>	3/16" Barb x 1/8" MPT
<b>FM24</b>	1/4" Barb x 1/8" MPT
<b>FM42</b>	1/8" Barb x 1/4" MPT
<b>FM43</b>	3/16" Barb x 1/4" MPT
<b>FM44</b>	1/4" Barb x 1/4" MPT
<b>FM45</b>	5/16" Barb x 1/4" MPT
<b>FM46</b>	3/8" Barb x 1/4" MPT
<b>FM48</b>	1/2" Barb x 1/4" MPT
<b>FM64</b>	1/4" Barb x 3/8" MPT
<b>FM65</b>	5/16" Barb x 3/8" MPT
<b>FM66</b>	3/8" Barb x 3/8" MPT
<b>FM68</b>	1/2" Barb x 3/8" MPT
<b>FM68-5</b>	5/8" Barb x 3/8" MPT
<b>FM84</b>	1/4" Barb x 1/2" MPT



## SOLID MALE

<b>FM86</b>	3/8" Barb x 1/2" MPT
<b>FM88</b>	1/2" Barb x 1/2" MPT
<b>FM88-5</b>	5/8" Barb x 1/2" MPT
<b>FM89</b>	3/4" Barb x 1/2" MPT
<b>FM98</b>	1/2" Barb x 3/4" MPT
<b>FM98-5</b>	5/8" Barb x 3/4" MPT
<b>FM99</b>	3/4" Barb x 3/4" MPT
<b>FM99-7</b>	1" Barb x 3/4" MPT
<b>FM99-9</b>	1" Barb x 1" MPT
<b>7028108</b>	5/16" Barb x 1/8" MPT
<b>7028111</b>	3/8" Barb x 1/8" MPT



## HOSE BARB X FEMALE (BRASS) - SOLID



<b>7028134</b>	1/4" Barb x 1/8" F.I.P. Brass
<b>FF44</b>	1/4" Barb x 1/4" F.I.P. Brass
<b>FF45</b>	1/4" Barb x 5/16" F.I.P. Brass
<b>7028136</b>	1/4" Barb x 3/8" F.I.P. Brass
<b>7028140</b>	3/8" Barb x 1/8" F.I.P. Brass
<b>FF46</b>	3/8" Barb x 1/4" F.I.P. Brass

<b>FF66</b>	3/8" Barb x 3/8" F.I.P. Brass
<b>7028143</b>	3/8" Barb x 1/2" F.I.P. Brass
<b>7028144</b>	1/2" Barb x 1/4" F.I.P. Brass
<b>FF68</b>	1/2" Barb x 3/8" F.I.P. Brass
<b>FF88</b>	1/2" Barb x 1/2" F.I.P. Brass

## HOSE BARB (MALE / FEMALE) - SWIVEL (BRASS/STEEL)

FEMALE HOSE BARB  
SWIVEL (1-PC) - Brass

<b>FFS144</b>	1/4" FPT x 1/4" Barb
<b>FFS145</b>	1/4" FPT x 5/16" Barb
<b>FFS146</b>	1/4" FPT x 3/8" Barb
<b>FFS166</b>	3/8" FPT x 3/8" Barb

FEMALE HOSE BARB  
SWIVEL (2-PC) - Brass

<b>FFS244</b>	1/4" FPT x 1/4" Barb
<b>FFS245</b>	1/4" FPT x 5/16" Barb
<b>FFS246</b>	1/4" FPT x 3/8" Barb
<b>FFS266</b>	3/8" FPT x 3/8" Barb

MALE HOSE  
BARB SWIVEL - Brass

<b>FMS144</b>	1/4" MPT x 1/4" Barb
<b>FMS145</b>	1/4" MPT x 5/16" Barb
<b>FMS146</b>	1/4" MPT x 3/8" Barb
<b>FMS166</b>	3/8" MPT x 3/8" Barb
<b>FMS188</b>	1/2" MPT x 1/2" Barb

MALE HOSE  
BARB SWIVEL - Steel

<b>FMS144S</b>	1/4" MPT x 1/4" Barb
----------------	----------------------

MALE HOSE  
BARB BALL SWIVEL - Steel

<b>FMBS44</b>	1/4" MPT x 1/4" Barb
<b>FMBS46</b>	1/4" MPT x 3/8" Barb

## BRASS ADAPTER FOR GAS REGULATOR

**FA615G**  
5/8" - 18 UNF  
Flared x M16 x 1.5  
Brass Adapter for Gas  
Regulator

## HOSE BARB FOR INFLATOR WHIPS

**FMS64T**  
3/8" - 24 UNF Male x 1/4"  
Hose Barb

## SPECIALTY STEEL BARB

**FM44RL**  
1/4" MPT Specialty  
Steel Barb



## HEADLESS COUNTER SINK PLUG



BRASS

**FPP22B** 1/8" MPT  
**FPP42B** 1/4" MPT  
**FPP62B** 3/8" MPT  
**FPP82B** 1/2" MPT  
**5318119** 3/4" MPT



STEEL

**FPP22S** 1/8" MPT  
**FPP42S** 1/4" MPT  
**FPP62S** 3/8" MPT  
**FPP82S** 1/2" MPT

## HEX PLUG



BRASS

**FPP21B** 1/8" MPT Brass Hex Plug  
**FPP41B** 1/4" MPT Brass Hex Plug  
**FPP61B** 3/8" MPT Brass Hex Plug  
**FPP81B** 1/2" MPT Brass Hex Plug



STEEL

**FPP41S** 1/4" MPT Steel Hex Plug  
**FPP61S** 3/8" MPT Steel Hex Plug

## BRASS PIPE FITTINGS

## BRASS HEX ADAPTERS (EXTENDER)



**FB202** 1/8" MPT x 1/8" FPT  
**FB204** 1/8" MPT x 1/4" FPT  
**FB404** 1/4" MPT x 1/4" FPT  
**FB406** 1/4" MPT x 3/8" FPT  
**FB408** 1/4" MPT x 1/2" FPT  
**FB606** 3/8" MPT x 3/8" FPT

## HEX NIPPLES



**FA212** 1/8" MPT  
**FA414** 1/4" MPT  
**FA616** 3/8" MPT  
**FA818** 1/2" MPT  
**FA919** 3/4" MPT  
**FA919-9** 1" MPT

## BRASS HEX BUSHING



**FB402** 1/4" MPT x 1/8" FPT  
**FB604** 3/8" MPT x 1/4" FPT  
**FB804** 1/2" MPT x 1/4" FPT  
**FB806** 1/2" MPT x 3/8" FPT  
**FB809** 1/2" MPT x 3/4" FPT  
**FB904** 3/4" MPT x 1/4" FPT  
**FB906** 3/4" MPT x 3/8" FPT  
**FB908** 3/4" MPT x 1/2" FPT  
**FB909-7** 1" MPT x 3/4" FPT

## HEX REDUCERS



**FA214** 1/8" x 1/4" MPT  
**FA416** 1/4" x 3/8" MPT  
**FA418** 1/4" x 1/2" MPT  
**FA618** 3/8" x 1/2" MPT  
**FA819** 1/2" x 3/4" MPT

## BALL SEAT BRASS ADAPTER



**FA212B** 1/8" MPSM x 1/8" NPTF  
**FA412B** 1/4" MPSM x 1/8" NPTF  
**FA414B** 1/4" MPSM x 1/4" NPTF  
**FA614B** 3/8" MPSM x 1/4" NPTF  
**FA616B** 3/8" MPSM x 3/8" NPTF



## BRASS PIPE FITTINGS

## COUPLINGS



<b>FPC220</b>	1/8" FPT x 1/8" FPT
<b>FPC240</b>	1/8" FPT x 1/4" FPT
<b>FPC440</b>	1/4" FPT x 1/4" FPT
<b>FPC460</b>	1/4" FPT x 3/8" FPT
<b>FPC480</b>	1/4" FPT x 1/2" FPT
<b>FPC660</b>	3/8" FPT x 3/8" FPT
<b>FPC680</b>	3/8" FPT x 1/2" FPT
<b>FPC880</b>	1/2" FPT x 1/2" FPT
<b>FPC990</b>	3/4" FPT x 3/4" FPT

## STREET PIPE FITTINGS



## STREET PIPE ELBOW

<b>FST22E</b>	1/8" MPT x 1/8" FPT
<b>FST44E</b>	1/4" MPT x 1/4" FPT
<b>FST66E</b>	3/8" MPT x 3/8" FPT



## STREET PIPE TEE

<b>FST22RT</b>	1/8" MPT x 1/8" FPT
<b>FST44RT</b>	1/4" MPT x 1/4" FPT
<b>FST66RT</b>	3/8" MPT x 3/8" FPT

STREET PIPE ELBOW  
45 DEGREE

<b>FST22EA</b>	1/8" MPT x 1/8" FPT
<b>FST44EA</b>	1/4" MPT x 1/4" FPT
<b>FST66EA</b>	3/8" MPT x 3/8" FPT
<b>FST88EA</b>	1/2" MPT x 1/2" FPT

STREET PIPE ELBOW  
45 DEGREE

<b>FST22EAF</b>	1/8" FPT x 1/8" FPT
<b>FST44EAF</b>	1/4" FPT x 1/4" FPT



## BRASS BRANCH TEE

<b>FP22TB</b>	1/8" FPT x 1/8" MPT
<b>FP44TB</b>	1/4" FPT x 1/4" MPT
<b>FP66TB</b>	3/8" FPT x 3/8" MPT



## RED BRASS PIPE FITTINGS

## 45° BRASS ELBOW



**5317030** 1/4"

## BRASS COUPLING



**5318019** 3/8"

## BRASS REDUCER COUPLING



**5318026** 1/4" x 1/8"

**5318027** 3/8" x 1/4"

**5318029** 1/2" x 3/8"

## BRASS HEX BUSHING



**5318056** 3/8" x 1/8"

**5318057** 3/8" x 1/4"

**5318058** 1/2" x 3/8"

## BRASS CAP



**5318081** 1/4"

**5318082** 3/8"

## LONG NIPPLES



**FA414LN** 1/4" MPT 2" Extension

**FA616LN** 3/8" MPT 2" Extension

## BRASS NIPPLE



**5319062** 1/8" x 2"

**5319064** 1/8" x 3"

## BRASS COMPRESSION FITTINGS

## SLEEVES



## COMPRESSION SLEEVE

**6960003** 1/4"

**6960004** 5/16"

**6960005** 3/8"

**6960006** 1/2"

**6960007** 5/8"

**6960008** 3/4"

## DELRIN SLEEVE

**6960023** 1/4"

**6960024** 5/16"

**6960025** 3/8"

**6960026** 1/2"

**6960027** 5/8"



## BRASS COMPRESSION FITTINGS

## COMPRESSION NUTS



**6961003** 1/4"  
**6961004** 5/16"  
**6961005** 3/8"  
**6961006** 1/2"  
**6961007** 5/8"  
**6961008** 3/4"

## COMPRESSION CAPS



**6961010** 1/4"  
**6961011** 5/16"  
**6961012** 3/8"  
**6961013** 1/2"  
**6961014** 5/8"

## COMPRESSION UNIONS



**6962003** 1/4"  
**6962004** 5/16"

## COMPRESSION INSERTS



**6996701** 1/4"  
**6996702** 5/16"  
**6996703** 3/8"  
**6996704** 1/2"  
**6996705** 5/8"

## ADAPTERS



**6968001** 1/8" Compression x 1/8" MIP Adapter  
**6968002** 3/16" Compression x 1/8" MIP Adapter  
**6968003** 3/16" Compression x 1/4" MIP Adapter  
**6968005** 1/4" Compression x 1/4" MIP Adapter  
**6968006** 1/4" Compression x 3/8" MIP Adapter  
**6968007** 1/4" Compression x 1/2" MIP Adapter  
**6968008** 5/16" Compression x 1/8" MIP Adapter  
**6968009** 5/16" Compression x 1/4" MIP Adapter  
**6968011** 5/16" Compression x 1/2" MIP Adapter  
**6968012** 3/8" Compression x 1/8" MIP Adapter  
**6968013** 3/8" Compression x 1/4" MIP Adapter  
**6968014** 3/8" Compression x 3/8" MIP Adapter  
**6968015** 3/8" Compression x 1/2" MIP Adapter  
**6968020** 1/2" Compression x 1/4" MIP Adapter  
**6968021** 1/2" Compression x 3/8" MIP Adapter  
**6968022** 1/2" Compression x 1/2" MIP Adapter

## ELBOWS



**6969000** 1/8" Compression x 1/8" MIP  
**6969001** 1/4" Compression x 1/8" MIP  
**6969002** 1/4" Compression x 1/4" MIP  
**6969003** 1/4" Compression x 3/8" MIP  
**6969009** 3/8" Compression x 1/4" MIP  
**6969010** 3/8" Compression x 3/8" MIP



## MANIFOLDS - CROSS / TEE / ELBOW / ROUND / DOME / RECTANGLE

3-WAY ROUND  
DOME MANIFOLD

MODEL INLET x OUTLET



ALUMINUM

**FPM44** 1/4" FPT x 1/4" FPT  
1-Inlet x 3-Outlets

**FPM64A** 3/8" FPT x 1/4" FPT  
1-Inlet x 3-Outlets

**FPM84A** 1/2" FPT x 1/4" FPT  
1-Inlet x 3-Outlets

BRASS FLAT  
HEX MANIFOLD

MODEL FPT



BRASS

**FPM44R** 1/4"  
1-Inlet x 3-Outlets  
4-Ports

**FPM66R-3** 3/8"  
1-Inlet x 3-Outlets  
4-Ports

**FPM66R** 3/8"  
1-Inlet x 5-Outlets  
6-Ports

RECTANGULAR MANIFOLD MODEL FPT



ALUMINUM

**FPM44S** 1/4"  
1-Inlet x 4-Outlets

RECTANGULAR MANIFOLD MODEL FPT



ALUMINUM

**FPM44SR** 3/8" Inlet  
1-Inlet x 4-Outlets 1/4" Outlet

RECTANGULAR MANIFOLD MODEL



ALUMINUM

**FPM68SR**  
1/2" FPT (2) x 3/8" (5) FPT  
Aluminum Rectangle Large  
Manifold - 2 inlet - 5 Outlets

BRASS CROSS MODEL FPT



BRASS

**FP22X** 1/8"  
**FP44X** 1/4"  
**FP66X** 3/8"  
**FP88X** 1/2"  
**FP99X** 3/4"

90° BRASS ELBOW MODEL SIZE



BRASS

**FPE22** 1/8" x 1/8"  
**FPE44** 1/4" x 1/4"  
**FPE66** 3/8" x 3/8"  
**FPE88** 1/2" x 1/2"  
**FPE99** 3/4" x 3/4"

BRASS TEE MODEL FPT



BRASS

**FP22T** 1/8"  
**FP44T** 1/4"  
**FP66T** 3/8"  
**FP88T** 1/2"  
**FP99T** 3/4"



## DOME STYLE AUTOMOTIVE

**FPM44-KA4**

3 Way Aluminum 1/4" Dome Manifold

## Includes:

- Three (3) 1/4" Steel Automotive Couplers (CA441)
- One (1) 1/4" Steel Automotive Plug (CPA441)
- One (1) Aluminum Round Style Manifold (FPM44)

**FPM44-KA6**

3 Way Aluminum 1/4" Dome Manifold

## Includes:

- Three (3) 3/8" Steel Automotive Couplers (CA641)
- One (1) 3/8" Steel Automotive Plug (CPA641)
- One (1) Aluminum Round Style Manifold (FPM44)

**FPM44-KA4B**

3 Way Aluminum 1/4" Dome Manifold

## Includes:

- Three (3) 1/4" Brass Automotive Couplers (CA441B)
- One (1) 1/4" Steel Automotive Plug (CPA441Z)
- One (1) Aluminum Round Style Manifold (FPM44)

## DOME STYLE INDUSTRIAL

**FPM44-KH4**

3 Way Aluminum 1/4" Dome Manifold

## Includes:

- Three (3) 1/4" Steel Industrial Couplers (CH441)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Aluminum Round Style Manifold (FPM44)

**FPM44-KH4B**

1/4" Aluminum Dome Manifold

## Includes:

- Three (3) 1/4" Brass Industrial Couplers (CH441B)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Aluminum Round Style Manifold (FPM44)

**FPM44-KH4BS**

3 Way Steel 1/4" Flat-Hex Manifold

## Includes:

- Three (3) 1/4" Brass Industrial Couplers (CH441BS)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Aluminum Dome Style Manifold (FPM44)

## FLAT-HEX STYLE AUTOMOTIVE

**FPM44R-KA4**

3 Way Brass 1/4" Flat-Hex Manifold

## Includes:

- Three (3) 1/4" Steel Automotive Couplers (CA441)
- One (1) 1/4" Steel Automotive Plug (CPA441)
- One (1) Flat Hex Style Manifold (FPM44R)

**FPM44R-KA6**

3 Way Brass 1/4" Flat-Hex Manifold

## Includes:

- Three (3) 3/8" Steel Automotive Couplers (CA641)
- One (1) 3/8" Steel Automotive Plug (CPA641)
- One (1) Flat Round Style Manifold (FPM44R)



## FLAT-HEX STYLE INDUSTRIAL



### FPM44R-KH4

3 Way Brass 1/4" Flat-Hex Manifold

Includes:

- Three (3) 1/4" Steel Industrial Couplers (CH441)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Flat Hex Style Manifold (FPM44R)



### FPM44R-KH4B

1/4" Brass Round Manifold

Includes:

- Three (3) 1/4" Brass Industrial Couplers (CH441B)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Flat Hex Style Manifold (FPM44R)



### FPM44R-KH4BS

3 Way Brass 1/4" Flat-Hex Manifold

Includes:

- Three (3) 1/4" Steel Industrial Couplers (CH441BS)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Brass Round Style Manifold (FPM44R)



### FPM66R-KH4B

3/8" Brass Round Manifold

Includes:

- Five (5) 3/8" Brass Industrial Couplers (CH461B)
- One (1) 3/8" Steel Industrial Plug (CPH461)
- One (1) Flat Hex Style Manifold (FPM66R)



### FPM66R-3-KH6

Flat-Hex Manifold

Includes:

- Three (3) 3/8" Steel Industrial Couplers (CH661)
- One (1) 3/8" Steel Industrial Plug (CPH661)
- One (1) Flat Hex Style Manifold (FPM66R-3)

## RECTANGULAR STYLE AUTOMOTIVE



### FPM44S-KA6

4 Way Aluminum

Includes:

- Four (4) 3/8" Steel Automotive Couplers (CA641)
- One (1) 3/8" Steel Automotive Plug (CPA641)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)

\* Maximum working pressure 300 PSI.

## RECTANGULAR STYLE INDUSTRIAL



### FPM44S-KH4

4 Way Aluminum

Includes:

- Four (4) 1/4" Steel Industrial Couplers (CH441)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)




### FPM44S-KH4B

4 Way Aluminum

Includes:

- Four (4) 1/4" Brass Industrial Couplers (CH441B)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)



### FPM44S-KH4BS

4 Way Aluminum

Includes:

- Four (4) 1/4" Steel Industrial Couplers (CH441BS)
- One (1) 1/4" Brass Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)



### FPM44SR-KH4B

4 Way Aluminum

Includes:

- Four (4) 1/4" Brass Universal Couplers (CG441B)
- One (1) 1/4" Brass Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)



## DOUBLE SWIVEL STYLE AUTOMOTIVE

**FS244-KA4**

Double Swivel Fitting

Includes:

- One (1) 1/4" Automotive Steel Plug
- Two (2) 1/4" Automotive Steel Coupler

## DOUBLE SWIVEL STYLE INDUSTRIAL

**FS244-KH4**

Double Swivel Fitting

Includes:

- One (1) 1/4" Industrial Steel Plug
- Two (2) 1/4" Industrial Steel Coupler

## DOME STYLE UNIVERSAL

**FPM44-KG4AB**

3 Way Aluminum

Includes:

- Three (3) 1/4" Brass Universal Couplers (CG441B)
- One (1) 1/4" Steel Automotive Plug (CPA441Z)
- One (1) Aluminum Round Style Manifold (FPM44)

## RECTANGULAR STYLE UNIVERSAL

**FPM44-KG4HB**

4 Way Aluminum

Includes:

- Four (4) 1/4" Brass Universal Couplers (CG441B)
- One (1) 1/4" Brass Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)

**FPM44S-KG4**

4 Way Aluminum

Includes:

- Four (4) 1/4" Steel Universal Couplers (CG441)
- One (1) 1/4" Steel Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)

\* Maximum working pressure 300 PSI.

**FPM44S-KG4AB**

4 Way Aluminum

Includes:

- Four (4) 1/4" Brass Universal Couplers (CG441B)
- One (1) 1/4" Steel Automotive Plug (CPA441Z)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)

**FPM44S-KG4HB**

4 Way Aluminum

Includes:

- Four (4) 1/4" Brass Universal Couplers (CG441B)
- One (1) 1/4" Brass Industrial Plug (CPH441)
- One (1) Aluminum Rectangular Style Manifold (FPM44S)

## COME IN "RETAIL READY" BLISTER PACKS!





The distinctive feature of these fittings is the swivel action that eliminates kinking & twisting of hose by allowing it to spin freely. Available in stock are variety of these fittings that provide required swivel flexibility. Our ball swivel fittings provide greater bend angle (20°- 25° depending on size) and flow capacity than traditional swivels.

## MALE PIPE IN-LINE BRASS SWIVEL



**FS04** 1/4" MPT x 1/4" FPT

## 90° BRASS SWIVEL



**FS14** 1/4" MPT x 1/4" FPT

## ALUMINUM UNIVERSAL SWIVEL



**FS24** 1/4" MPT x 1/4" FPT

## DOUBLE SWIVEL FITTING



**FS244** 1/4" Male NPT

## BRASS FITTING WITH STEEL SWIVEL ADAPTER



**FBS404** 1/4" MPT x 1/4" FPT  
**FBS604** 3/8" MPT x 1/4" FPT

## SWIVEL BARB STEEL CONSTRUCTION & ZINC COATED



**FMBS44** 1/4" MPT x 1/4"  
**FMBS46** 1/4" MPT x 3/8"





### ADJUSTABLE BACK TRIGGER BRASS TIP NOZZLE



**8430342**

**Features:**

- Continuously adjustable from fine mist to heavy stream
- Lockable back trigger for effortless continuous spraying
- Premium brass and zinc build for exceptional durability
- Insulated unit keeps the handle from getting hot or cold
- Ergonomic and contoured soft grip prevents fatigue

### FIREMAN METAL NOZZLE WITH BACK TRIGGER



**8430446**

**Features:**

- Adjust water spray output from extra wide to blasting flow
- Comes with a fiberglass-reinforced lever for convenient use
- Heavy-duty metal build brings industrial-level durability
- Ergonomic grip makes long hours fatigue-free
- Provides versatility and performance for professional jobs

### HIGH FLOW HEAVY DUTY METAL NOZZLE



**8430447**

**Features:**

- Large flow control handle for easier operation
- Features a soft coated ergonomic grip for fatigueless use
- Adjust anywhere between blasting flow and fine wide angle spray
- Premium and heavy-duty build for enhanced durability
- Provides improved versatility and control for a variety of watering tasks

### FIREMAN FIRE HOSE NOZZLE WITH ADJUSTABLE SPRAY



**8430348**

**Features:**

- Premium quality metal construction for extensive usage
- Adjustable water stream from fine spray to powerful blast
- Soft rubberized insulation for comfortable grip



**DOUBLE JACKET WITH ALUMINUM NST COUPLING - PU LINING 300 PSI****8610001** - 1-1/2" × 50Ft.**8610002** - 1-1/2" × 100Ft.**Specifications:**


- Service Pressure - 300 PSI
- Proof Test Pressure - 450 PSI
- Burst Pressure - 900 PSI
- Lay Flat Width - About 2-3/4"
- Couplings -NH/NST (Fire Hose Threads) - Anodized Aluminum

**PLASTIC NOZZLES****8614000**3/4"Female GHT  
Plastic Nozzle**8614001**1-1/2"Female NH/NST  
Plastic Nozzle**WRENCHES****8615000**Adjustable Fire  
Hydrant Wrench**8615001**5 Holes Fire  
Hydrant Wrench



**Interstate Pneumatics** compressed air blowguns shown in this catalog feature precision machined chrome plated metal castings and solid brass internal parts. All have a 1/4" NPT female inlet and 1/8" NPT female outlet. **Interstate Pneumatics** blowguns are lightweight and designed to fit comfortably in the user's hand. Maximum working pressure 225 PSI.

#### ALL BRASS INTERNAL PARTS FOR FREE OPERATION

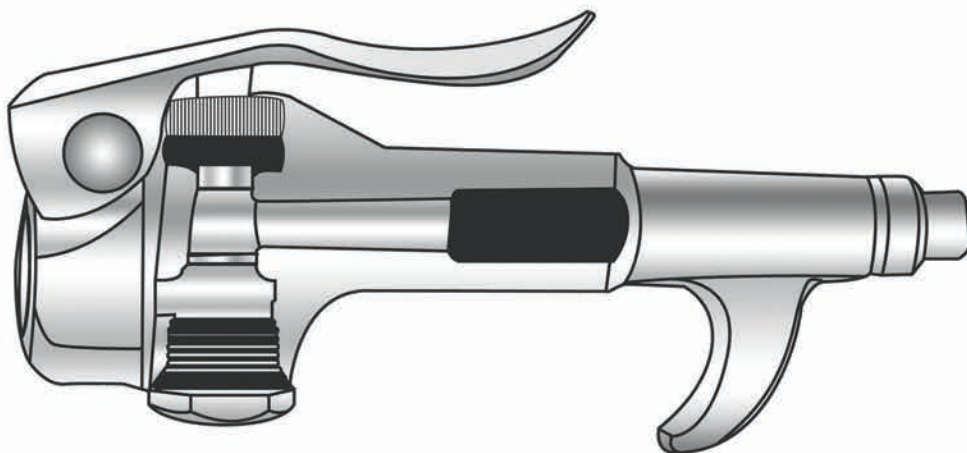

3 O-Rings  
Leakproof Operation

Bottom mounted Nut  
allows field repair

Chrome plated cast Zinc body  
Long service life

#### AIR FLOW DATA

The chart below will help you in selecting the proper blowgun for your individual application. The chart shows in CFM (Cubic Feet per Minute), the actual air consumed compared to the air delivered at the tip end. Flow data is based on an inlet pressure of 100 PSI. The maximum sound limit for following blowguns is 87 dBA.

Model Number	Air Consumed CFM	Air Delivered CFM	Model Number	Air Consumed CFM	Air Delivered CFM
<b>B100A</b>	15	15	<b>B311</b>	10	10
<b>B100H</b>	15	15	<b>B312S</b>	11	11
<b>B232</b>	10	10	<b>B412</b>	70	70
<b>B234</b>	10	10	<b>B500</b>	10	10
<b>B300</b>	41	41	<b>B501</b>	9	9
<b>B301</b>	8	8	<b>B502</b>	14	14
<b>B302 / 302S</b>	11	11	<b>B502L</b>	12	12
<b>B303</b>	10	10	<b>B503</b>	10	10
<b>B304</b>	18	18	<b>B600</b>	35	35
<b>B306</b>	11	16	<b>B610</b>	50	50
<b>B307</b>	6	15	<b>BZ306</b>	11	11
<b>B308</b>	8	14	<b>BZ310</b>	40	40
<b>B309</b>	35	35			

**WARNING:** Do not use blowguns on airlines that are not regulated or when the pressure at the gun exceeds 150 PSI. Use the correct size male threaded adapter with Teflon sealing tape. Make sure gun's securely tightened to the adapter. The Adapter must be threaded into the gun for the full depth of the female thread. Do not re-tap or modify the thread for a non-standard adapter. Use of these products contrary to specifications and directions may result in personal injury or property damage. Use eye protection when using blowguns.



## SAFETY BLOWGUNS

**Interstate Pneumatics** Safety Series Blowguns comply with \*OSHA 1910.242b and 1910.95 by using a tip that reduces the pressure from a maximum of 150 PSI to an outlet pressure of 30 PSI at the nozzle. The tip also includes a safety by-pass which prevents excess pressure build-up in the gun if the nozzle becomes clogged or "dead-ended". All **Interstate Pneumatics** Safety Series Blowguns have a 1/4" NPT female inlet and 1/8" NPT female outlet. Area of bottom of Blowgun is recessed to perfectly fit the user fingers allowing a firm yet relaxed grip. Application include blowing away dust, metal chips, wood chips etc.

### B302S SAFETY BLOWGUN WITH RUBBER SAFETY TIP



Zinc die-cast chrome plated body blowgun thumb lever with brass valve and tamper proof rubber coated brass safety tip

### B306 STANDARD SAFETY BLOWGUN WITH SAFETY TIP



BT6S safety brass tip

Draws additional air through slots in tip to increase output flow by 40%

### B307 STRATA FLOW BLOWGUN WITH SAFETY TIP



BT7S safety brass tip

Heavy velocity concentrates air into a less turbulent stream for smooth operation

### B308 SAFETY TAMPER PROOF GUN



**Brass Tip** swivels to prevent removal. Excellent general purpose blowgun

### B309 XS3 / XS6 SAFETY BLOWGUN



B309XS3 safety blowgun with 3" extension  
B309XS6 safety blowgun with 6" extension

### B311 IN LINE BLOWGUN



In-line safety blowgun with **Brass Tip**

### B312S IN-LINE BLOW GUN WITH RUBBER SAFETY TIP



In-line blowgun with Rubber coated Brass safety tip.

COME IN "RETAIL-READY" BLISTER PACKS!"





## HEAVY DUTY BLOWGUNS

**Interstate Pneumatics** Heavy Duty Blowguns feature a heavy cast body for durability and long service life in the most rugged applications. Designed for high volume air flow. Maximum working pressure 225 PSI.

## B500 HEAVY DUTY BLOWGUN



Heavy duty blowgun without tip with long barrel

## B502 HEAVY DUTY BLOWGUN ANGLED BARREL



Heavy duty blowgun  
Angled barrel with rubber tip to protect work  
Bent down to allow access to hard to reach areas

## B501 HEAVY DUTY BLOWGUN



Heavy duty blowgun with extended barrel and brass tip

## B503 HEAVY DUTY BLOWGUN



Heavy Duty Blow Gun with 1/8" MPT rubber tip

## STANDARD &amp; SPECIALTY BLOWGUNS

## B300 STANDARD THUMB LEVER BLOWGUN



1/4" FPT standard thumb lever without tip blowgun

## B301 STANDARD THUMB LEVER BLOWGUN



1/4" FPT standard thumb lever with brass tip

## B302 STANDARD THUMB LEVER BLOWGUN



1/4" FPT standard thumb lever with rubber tip

## B303 PISTOL GRIP BLOWGUN



1/4" FPT pistol grip with rubber tip blowgun



## SAFETY BLOW GUN WITH EXTENSION TIPS & HEX BUSHINGS

### B500XT12 12" EXTENSION BLOW TIP & HEX BUSHING REDUCER



12" extension blow tip & hex bushing reducer with a 12" extension.

Air inlet of 1/4" NPT & a maximum working pressure of 175 PSI

### B500XT24 24" EXTENSION BLOW TIP & HEX BUSHING REDUCER



24" extension blow tip & hex bushing reducer with a 12" extension.

Air inlet of 1/4" NPT & a maximum working pressure of 175 PSI

### B500XT36 36" EXTENSION BLOW TIP & HEX BUSHING REDUCER



36" extension blow tip & hex bushing reducer with a 12" extension.

Air inlet of 1/4" NPT & a maximum working pressure of 175 PSI

### B412 TRI-THURST SAFETY NOZZLE KIT



#### Kit Includes:

- Tri-port high flow nozzle with 1/2" - 20 UNF.
- 6" long safety extension with 1/2" - 20 UNF.
- 6" long safety extension with 1/8" - 20 NPSM.

### B502L 1/4" NPT 2 FOOT EXTENSION LEVER STYLE



1/4" NPT 2 Foot Extension Lever Style Heavy Duty Blow Gun Angled Barrel with Rubber Tip



## STANDARD AND SPECIALTY BLOWGUNS

**B304 PISTOL GRIP BLOWGUN**

1/4" FPT pistol grip with  
8" steel extension

**B204 NYLON BLOWGUN**

1/4" FPT nylon blowgun  
Maximum working pressure 175 PSI.

**B305 STANDARD THUMB LEVER SIPHON SPRAYGUN**

The Interstate Pneumatics Siphon Spray Gun blows air / liquid (cleaning solution) to clean auto engines and other mechanical parts, it comes with a control valve to regulate density of mist.



1/4" FPT standard thumb  
lever siphon spraygun  
Comes with 1/4" x 8ft. long  
PVC Tubing

**B312 IN-LINE BLOWGUN**

In-line blowgun with rubber tip. It  
is secured permanently between  
coupler and airhose. Provide  
1/4" FPT connections for easy  
installation.

**BZ310 HIGH-FLOW AIR BLOWGUN KIT**

With 3 Nozzles  
1/4" I/M style plug  
40 CFM 90 PSI  
150 PSI

**BZ306 BLOWGUN KIT**

**Kit includes:**  
**B301** Standard economy  
Safety Blowgun  
**BT6S** 1/8" MPT Slotted brass tip  
**BTN3** 0.065" x 1-3/4" Needle tip  
**BTN4** 0.095" x 2-1/2" Needle tip  
**BTN5** 0.134" x 2-3/4" Needle tip

**1/4" ADJUSTABLE AUTOMOTIVE / INDUSTRIAL POCKET BLOWGUN**

**B100A** 1/4" adjustable automotive pocket blowgun



**B100H** 1/4" adjustable industrial pocket blowgun

**COME IN "RETAIL-READY"  
BLISTER PACKS!"**





## STANDARD AND SPECIALTY BLOWGUNS

## B600 HEAVY-DUTY BLOWGUN



Die Casted Aluminum Heavy Duty Blowgun Copper Plated with smooth surface body with 1/4" NPT inlet

## B610 HEAVY-DUTY BLOWGUN



Die Casted Aluminum Heavy Duty Blowgun Copper Plated with body ridges with 3/8" NPT inlet

## INFLATORS / AIR NOZZLES

## B232 ECONOMY BLOWGUN



Lightweight tilt valve blowgun. Press side of gun to operate. 1/4" MPT inlet Ideal for inflating balloons.

## B234 ECONOMY BLOWGUN



Lightweight tilt valve blowgun. Press side of gun to operate. 1/4" FPT inlet. Ideal for inflating balloons.



## TIPS AND ACCESSORIES

These tips can be placed on any **Interstate Pneumatics** B300, B500 series blowgun body.

## SAFETY NOZZLE TIPS



**BT1**  
1/8" MPT Brass tip



**BT2**  
1/8" MPT Rubber tip molded rubber on brass



**BT6S**  
1/8" MPT Slotted brass tip



**BT2S**  
1/8" MPT Rubber tip molded rubber on brass  
Rubber skin for BT8S, brass tip



**BT7S**  
1/8" MPT Strata flow safety tip

## BLOWGUN KITS




**BT-KIT**  
1/8" MPT Blowgun 5 Piece Tips Kit

## Includes:

- 1/8" MPT Brass Tip
- 1/8" MPT Rubber Tip
- 1/8" MPT Safety Rubber Tip (Molded Rubber on Brass)
- 1/8" MPT Standard Brass Safety
- 1/8" MPT Strata Flow Tip

## NEEDLE TIPS



**BTN5A NEEDLE TIP ASSORTMENT**  
INCLUDES ALL 5 SIZES OF NEEDLE TIPS.

Model #	OD	Pin Length (L)
<b>BTN1</b>	0.0425"	7/8"
<b>BTN2</b>	0.050"	1-1/8"
<b>BTN3</b>	0.065"	1-3/4"
<b>BTN4</b>	0.095"	2-1/2"
<b>BTN5</b>	0.134"	2-3/4"

**BTN1****BTN2****BTN3****BTN4****BTN5**

## NOZZLE TIP



**BT6AS-D**  
1/4" MPT Rubber Blow Gun Tip



**BT7AS-D**  
1/4" MPT Rubber Blow Gun Tip



**BT20K**  
4-Piece Rubber Tip Air Nozzle Set with High-Flow Adapter



## STANDARD EXTENSION TIPS



1/8" MPT

**BX3** Standard 3" extension tip  
**BX6** Standard 6" extension tip

## SAFETY EXTENSION TIPS



OSHA COMPLIANT

1/8" MPT

**BXS03** 3" Safety extension  
**BXS06** 6" Safety extension  
**BXS12** 12" Safety extension

**BXS24** 24" Safety extension  
**BXS36** 36" Safety extension

## TELESCOPING EXTENSION BLOWGUN TIPS



**BXT12** 12" Telescoping Extension Blowgun Tip with 1/8" MPT  
**BXT24** 24" Telescoping Extension Blowgun Tip with 1/8" MPT  
**BXT36** 36" Telescoping Extension Blowgun Tip with 1/8" MPT

\* Using different tips on these blowguns will affect the SCFM 1/8" NPT male threads on all blowgun tips

## 12" FLEX GREASE GUN HOSE EXTENSION WITH SPRING GUARD



### ZY900

Working Pressure (PSI): 4,500  
Burst Pressure (PSI): 12,000  
Hose Length: 12"  
Both ends have 1/8" NPT (M) threads  
Nominal I.D 1/8" Nominal O.D 5/16"



## PVC HOSES

**Interstate Pneumatics** PVC Air Hoses are made from a tough lightweight compound that is highly resistant to the degrading effects of oil, grease & ultraviolet light. High abrasion resistance makes this hose ideal for use in the most rugged applications. Pre-cut lengths have solid brass fittings, ferrules & boots. Bulk reels have no fittings.

## RED PVC HOSES



Model #	Sizes
<b>HA04-012BS</b> (w/1/4" Ball Swivel)	1/4" x 12ft.
<b>HA04-025</b>	1/4" x 25ft.
<b>HA04-050</b>	1/4" x 50ft.
<b>HA04-100</b>	1/4" x 100ft.
<b>HA04-050H44</b> (w/1/4" Steel Industrial Coupler/Plug)	1/4" x 50ft.
<b>HA04-100H44</b> (w/1/4" Steel Industrial Coupler/Plug)	1/4" x 100ft.
<b>HA04-100H44B</b> (w/1/4" Brass Industrial Coupler/Plug)	1/4" x 100ft.
<b>HA36-025</b>	3/8" x 25ft.
<b>HA36-050</b>	3/8" x 50ft.
<b>HA36-100</b>	3/8" x 100ft.



- ✓ Temperature range -20°F to 150°F
- ✓ Working pressure 300 PSI @ 75°F
- ✓ Safety factor 4:1



## ORANGE PVC HOSES



Model #	Sizes
<b>HA26-025E</b>	3/8" x 25ft.
<b>HA26-050E</b>	3/8" x 50ft.
<b>HA26-100E</b>	3/8" x 100ft.



- ✓ Temperature range -20°F to 150°F
- ✓ Working pressure 300 PSI @ 75°F
- ✓ Safety factor 4:1



## BLUE PVC HOSES



Model #	Sizes
<b>HA06-025E</b>	3/8" x 25ft.
<b>HA06-050E</b>	3/8" x 50ft.
<b>HA06-100E</b>	3/8" x 100ft.
<b>HA06-750E</b>	3/8" x 750ft. (Spool)



- ✓ Temperature range -20°F to 150°F
- ✓ Working pressure 300 PSI @ 75°F
- ✓ Safety factor 4:1





## DRINKING WATER / GARDEN HOSES

**Interstate Pneumatics** heavy-duty contractor grade water hose built for tough job sites and demanding applications. Made from durable PVC construction, it resists kinking, abrasions, and harsh weather conditions while maintaining flexibility for easy handling. Equipped with solid brass garden hose fittings, it provides a secure, leak-proof connection for reliable performance.

### 3/4" WATER / GARDEN HOSES



Model #	Sizes
<b>HCG19-025E</b>	3/4" x 25ft.
<b>HCG19-050E</b>	3/4" x 50ft.
<b>HCG19-075E</b>	3/4" x 75ft.
<b>HCG19-100E</b>	3/4" x 100ft.



- Features:**
- ✓ 3/4" GHT Fittings on Both Ends (Male/Female)
  - ✓ Durable Three Ply Fiber Reinforced Construction
  - ✓ Working Pressure 200 PSI
  - ✓ Burst Pressure 800 PSI



**Brass 3/4" Male Fitting**  
(Machined Bar Stock)



**Brass 3/4" Female Fitting**  
(Machined Bar Stock)



**PVC Bend Restrictor**

### 5/8" WATER / GARDEN HOSES



Model #	Sizes
<b>HCR19-025E</b>	5/8" x 25ft.
<b>HCR19-050E</b>	5/8" x 50ft.



- Features:**
- ✓ 3/4" GHT Fittings on Both Ends (Male/Female)
  - ✓ Durable Three Ply Fiber Reinforced Construction
  - ✓ Working Pressure 200 PSI
  - ✓ Burst Pressure 800 PSI



**Brass 3/4" Male Fitting**  
(Machined Bar Stock)



**Brass 3/4" Female Fitting**  
(Machined Bar Stock)



**PVC Bend Restrictor**

### 5/8" DRINKING WATER HOSES



Model #	Sizes
<b>HHW-050</b>	5/8" x 50ft.



- Features:**
- ✓ Food Grade
  - ✓ Reinforced Hybrid Material
  - ✓ Anti-Kink Design
  - ✓ All Weather Flexible (-22°F to 150°F)
  - ✓ Working pressure: 150 PSI



**Aluminum 3/4" Male Fitting**



**Aluminum 3/4" Female Fitting**



**PVC Bend Restrictor**





## WATER HOSE FITTINGS



**FGM308** 3/4" GHT Male x 1/2" Barb  
**FGM310** 3/4" GHT Male x 5/8" Barb  
**FGM312** 3/4" GHT Male x 3/4" Barb



**FGF308** 3/4" GHT Female x 1/2" Barb  
**FGF310** 3/4" GHT Female x 5/8" Barb  
**FGF312** 3/4" GHT Female x 3/4" Barb



**FGM016** 3/4" GHT Male x 3/8" Male NPT  
**FGM018** 3/4" GHT Male x 1/2" Male NPT  
**FGM0112** 3/4" GHT Male x 3/4" Male NPT



**FGF104** 3/4" GHT Female x 1/4" Male NPT  
**FGF106** 3/4" GHT Female x 3/8" Male NPT  
**FGF108** 3/4" GHT Female x 1/2" Male NPT  
**FGF112** 3/4" GHT Female x 3/4" Male NPT



**FGF008S** 3/4" GHT Female x 1/2" Female NPT  
**FGF012S** 3/4" GHT Female x 3/4" Female NPT



**FGC00** Garden Hose Cap



**FGF00S** 3/4" GHT Female x 3/4" GHT Female



**FGF-0R1** Garden Hose Washer



**FGF01S** 3/4" GHT Male x 3/4" GHT Female



**CPW19** 3/4" GHT Male Coupler Plug



**FGF111** 3/4" GHT Male x 3/4" Female FPT



**CW19** 3/4" GHT Female Coupler



**FGF01Y** 3/4" GHT (1F) x 3/4" GHT (2M)  
 Y-Connector - Filling Brass



**CZ19** 3/4" GHT Female Kit

## CROSS PATTERN BRASS NOZZLE



**FGN23** 4" GHT



## LIGHT BLUE POLYURETHANE BRAIDED HOSE

Interstate Pneumatics polyurethane hoses are made of the finest polyurethane materials which provide maximum resistance to oil, grease and abrasion. Polyurethane has higher flexibility and kink resistance than nylon materials. Their low weight, in comparison to regular rubber hose makes them a favorite for all industrial and automotive applications. The braided construction prevents layers separating from each other due to pulsating operations typically when using nailers and staplers.



Model #	Sizes	Fitting Type
<b>HU14-025</b>	1/4" x 25ft.	Solid Fitting
<b>HU14-050</b>	1/4" x 50ft.	Solid Fitting
<b>HU14-100</b>	1/4" x 100ft.	Solid Fitting
<b>HU15-025</b>	5/16" x 25ft.	Solid Fitting
<b>HU15-050</b>	5/16" x 50ft.	Solid Fitting
<b>HU15-100</b>	5/16" x 100ft.	Solid Fitting
<b>HU16-025</b>	3/8" x 25ft.	Solid Fitting
<b>HU16-050</b>	3/8" x 50ft.	Solid Fitting
<b>HU16-100</b>	3/8" x 100ft.	Solid Fitting



- ✓ Comes with 1/4" MPT solid crimped fitting & black rubber boot on both ends
- ✓ Temperature range -40°F to 165°F
- ✓ Working pressure 200 PSI
- ✓ Safety factor 4:1



Model #	Sizes
<b>HU14-600</b>	1/4" x 600ft (Spool)



Model #	Description
<b>HB14SW</b>	1/4" Rubber Boot for Light Blue (HU14 Series) Hose Only



Model #	Description
<b>HB14SW-S</b>	1/4" Rubber Boot for Light Blue (HU14 Series) Hose Only Hex Hole



Model #	Sizes	Fitting Type
<b>HU14-025H44</b>	1/4" x 25ft.	Installed with a 1/4" Steel Coupler & Plug (Industrial)
<b>HU14-050H44</b>	1/4" x 50ft.	Installed with a 1/4" Steel Coupler & Plug (Industrial)
<b>HU14-100H44</b>	1/4" x 100ft.	Installed with a 1/4" Steel Coupler & Plug (Industrial)
<b>HU14-100H44BS</b>	1/4" x 100ft.	Installed with a 1/4" Brass Slim Coupler & Plug (Industrial)
<b>HU16-025H44</b>	3/8" x 25ft.	Installed with a 1/4" Steel Coupler & Plug (Industrial)
<b>HU16-050H44</b>	3/8" x 50ft.	Installed with a 1/4" Steel Coupler & Plug (Industrial)
<b>HU16-050H44BS</b>	3/8" x 50ft.	Installed with a 1/4" Brass Slim Coupler & Plug (Industrial)
<b>HU16-100H44</b>	3/8" x 100ft.	Installed with a 1/4" Steel Coupler & Plug (Industrial)
<b>HU16-100H44BS</b>	3/8" x 100ft.	Installed with a 1/4" Brass Slim Coupler & Plug (Industrial)
<b>HU16-025A64</b>	3/8" x 25ft.	Installed with a 3/8" Steel Coupler & Plug (Automotive)
<b>HU16-050A64</b>	3/8" x 50ft.	Installed with a 3/8" Steel Coupler & Plug (Automotive)
<b>HU16-100A64</b>	3/8" x 100ft.	Installed with a 3/8" Steel Coupler & Plug (Automotive)



## YELLOW POLYURETHANE BRAIDED HOSE



Model #	Sizes	Fitting Type
<b>HU54-025</b>	1/4" x 25ft.	Solid Fitting
<b>HU54-050</b>	1/4" x 50ft.	Solid Fitting
<b>HU54-100</b>	1/4" x 100ft.	Solid Fitting
<b>HU56-025</b>	3/8" x 25ft.	Solid Fitting
<b>HU56-050</b>	3/8" x 50ft.	Solid Fitting
<b>HU56-100</b>	3/8" x 100ft.	Solid Fitting



- ✓ Comes with 1/4" MPT solid crimped fitting & black rubber boot on both ends
- ✓ Temperature range -40°F to 165°F
- ✓ Working pressure 200 PSI
- ✓ Safety factor 4:1






## POLYURETHANE RECOIL HOSES

**INTERSTATE PNEUMATICS** Polyurethane Recoil Hoses are made of the finest polyurethane materials, which provide maximum resistance to oil, grease, and abrasion. Their low weight, in comparison to regular rubber hose, makes them a favorite for all industrial and automotive applications. These hoses automatically retract when not in use, eliminating hazards caused by loose hoses on the work floor.

**Salient Features:**

- High kink resistance compared to nylon hoses
- Extreme flexibility, stretches 25% more compared to nylon hose
- Abrasion resistance 6-10 times more than nylon or rubber hose
- Pigtails at each end; supply end 8" long and working end 16" long
- This keeps the coils away from the tool
- Swivel fittings with rubber boot protectors.

## YELLOW 1/4" I.D. POLYURETHANE RECOIL HOSES



- ✓ Safety factor 3:1
- ✓ Temperature range -40°F to 140°F

Model No.	Hose Length	Stored Length	Working Length	*O.P. @ 75°F	Fitting Size	Fitting Type
<b>HR14-005</b>	5ft.	2.5"	3.4ft.	125 PSI	1/4" NPT	Solid
<b>HR14-010</b>	10ft.	5.5"	6.7ft.	125 PSI	1/4" NPT	Solid
<b>HR14-012</b>	12ft.	6.5"	8ft.	125 PSI	1/4" NPT	Solid
<b>HR14-015</b>	15ft.	8"	10ft.	125 PSI	1/4" NPT	Solid
<b>HR14-025</b>	25ft.	13"	17ft.	125 PSI	1/4" NPT	Solid
<b>HR14-050</b>	50ft.	24"	33.5ft.	125 PSI	1/4" NPT	Solid
<b>HR14-100</b>	100ft.	53"	67ft.	125 PSI	1/4" NPT	Solid


## TRANSLUCENT BLUE 1/4" I.D. POLYURETHANE RECOIL HOSES



- ✓ Safety factor 3:1
- ✓ Temperature range -40°F to 140°F

Model No.	Hose Length	Stored Length	Working Length	*O.P. @ 75°F	Fitting Size	Fitting Type
<b>HR24-010</b>	10ft.	5"	9ft.	125 PSI	1/4" NPT	Solid
<b>HR24-015</b>	15ft.	8.5"	13.5ft.	125 PSI	1/4" NPT	Solid
<b>HR24-020</b>	20ft.	11.5"	18ft.	125 PSI	1/4" NPT	Solid
<b>HR24-025</b>	25ft.	16"	22.5ft.	125 PSI	1/4" NPT	Solid
<b>HR24-030</b>	30ft.	19"	27ft.	125 PSI	1/4" NPT	Solid
<b>HR24-050</b>	50ft.	30"	47ft.	125 PSI	1/4" NPT	Solid

## RED 1/4" I.D. POLYURETHANE RECOIL HOSES

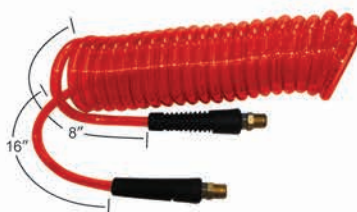


- ✓ Safety factor 3:1
- ✓ Temperature range -40°F to 140°F

Model No.	Hose Length	Stored Length	Working Length	*O.P. @ 70° F	Fitting Size	Fitting Type
<b>HR34-010</b>	10ft.	6"	9ft.	125 PSI	1/4" NPT	Solid
<b>HR34-015</b>	15ft.	9.5"	13.5ft.	125 PSI	1/4" NPT	Solid
<b>HR34-020</b>	20ft.	13"	18ft.	125 PSI	1/4" NPT	Solid
<b>HR34-025</b>	25ft.	16"	22.5ft.	125 PSI	1/4" NPT	Solid
<b>HR34-030</b>	30ft.	19"	27ft.	125 PSI	1/4" NPT	Solid
<b>HR34-050</b>	50ft.	33"	47ft.	125 PSI	1/4" NPT	Solid

\*O.P. Operating pressure



## ORANGE 1/4" I.D. POLYURETHANE RECOIL HOSES



- ✓ Safety factor 3:1
- ✓ Temperature range -40°F to 140°F
- ✓ 8" & 16" Long Ends

Model No.	Hose Length	Stored Length	Working Length	*O.P. @ 70° F	Fitting Size	Fitting Type
<b>HR44-010</b>	10ft.	6"	9ft.	125 PSI	1/4" NPT	Solid
<b>HR44-015</b>	15ft.	9.5"	13.5ft.	125 PSI	1/4" NPT	Solid
<b>HR44-020</b>	20ft.	13"	18ft.	125 PSI	1/4" NPT	Solid
<b>HR44-025</b>	25ft.	16"	22.5ft.	125 PSI	1/4" NPT	Solid
<b>HR44-030</b>	30ft.	19"	27ft.	125 PSI	1/4" NPT	Solid
<b>HR44-050</b>	50ft.	33"	47ft.	125 PSI	1/4" NPT	Solid

## BRAIDED-TRANSLUCENT BLUE 1/4" I.D. POLYURETHANE RECOIL HOSES



- ✓ Burst Pressure: 800 PSI
- ✓ Operating Pressure: 200 PSI
- ✓ Safety factor 4:1
- ✓ Temperature range -40°F to 165°F
- ✓ 8" & 16" Long Ends

Model No.	Hose Length	Stored Length	Working Length	*O.P. @ 70°F	Fitting Size	Fitting Type
<b>HR74-010</b>	10ft.	10"	9.0ft.	200 PSI	1/4" NPT	Solid
<b>HR74-015</b>	15ft.	15"	13.5ft.	200 PSI	1/4" NPT	Solid
<b>HR74-025</b>	25ft.	25"	22.5ft.	200 PSI	1/4" NPT	Solid
<b>HR74-050</b>	50ft.	50"	47.0ft.	200 PSI	1/4" NPT	Solid
<b>HR74-010S</b>	10ft.	10"	9.0ft.	200 PSI	1/4" NPT	Swivel
<b>HR74-015S</b>	15ft.	15"	13.5ft.	200 PSI	1/4" NPT	Swivel
<b>HR74-025S</b>	25ft.	25"	22.5ft.	200 PSI	1/4" NPT	Swivel

## BRAIDED-TRANSLUCENT BLUE 3/8" I.D. POLYURETHANE RECOIL HOSES



- ✓ Safety factor 4:1
- ✓ Temperature range -40°F to 165°F
- ✓ 8" & 16" Long Ends

Model No.	Hose Length	Stored Length	Working Length	*O.P. @ 70° F	Fitting Size	Fitting Type
<b>HR76-010</b>	10ft.	29.5"	9ft.	200 PSI	1/4" NPT	Solid
<b>HR76-015</b>	15ft.	32.5"	13ft.	200 PSI	1/4" NPT	Solid
<b>HR76-025</b>	25ft.	38"	21ft.	200 PSI	1/4" NPT	Solid
<b>HR76-050</b>	50ft.	44"	42ft.	200 PSI	1/4" NPT	Solid

## RECOIL HOSES WITH SWIVEL FITTINGS & BLOWGUN



**HR14-012B** 1/4" 12ft. long w/1/4" NPT Swivel Fittings, Recoil Yellow PU Hose + Blowgun

**HR14-025B** 1/4" 25t. long w/1/4" NPT Swivel Fittings, Recoil Yellow PU Hose + Blowgun

\*O.P. Operating Pressure



## YELLOW HYBRID POLYMER HOSES

**INTERSTATE PNEUMATICS** Hybrid Poly Air Hose has been manufactured with a unique rubber and PVC blend for lightweight handling and professional performance. Integrated bend restrictors eliminate kinking and tangling, guaranteeing seamless airflow and increase hose life. Its smooth, non-marring construction safeguards delicate surfaces while the vibrant color enhances safety even in dimly lit environments. With exceptional all-weather flexibility, this hose is a dependable choice for professionals.



Model #	Sizes	Fitting Type
<b>HH14-025</b>	1/4" x 25ft.	Solid Fitting
<b>HH14-050</b>	1/4" x 50ft.	Solid Fitting
<b>HH14-100</b>	1/4" x 100ft.	Solid Fitting
<b>HH16-025</b>	3/8" x 25ft.	Solid Fitting
<b>HH16-050</b>	3/8" x 50ft.	Solid Fitting
<b>HH16-100</b>	3/8" x 100ft.	Solid Fitting



- ✓ Comes with 1/4" MPT solid crimped fitting & black PE boots on both ends
- ✓ Temperature range -40°F to 150°F
- ✓ Working pressure 300 PSI
- ✓ Safety factor 4:1



Model #	Sizes	Fitting Type
<b>HH14-025H44BS</b>	1/4" x 25ft.	Installed with a 1/4" Brass Coupler & Plug (Industrial)
<b>HH14-050H44BS</b>	1/4" x 50ft.	Installed with a 1/4" Brass Coupler & Plug (Industrial)
<b>HH14-100H44BS</b>	1/4" x 100ft.	Installed with a 1/4" Brass Coupler & Plug (Industrial)
<b>HH16-025H44BS</b>	3/8" x 25ft.	Installed with a 3/8" Brass Coupler & Plug (Industrial)
<b>HH16-050H44BS</b>	3/8" x 50ft.	Installed with a 3/8" Brass Coupler & Plug (Industrial)
<b>HH16-100H44BS</b>	3/8" x 100ft.	Installed with a 3/8" Brass Coupler & Plug (Industrial)



## RED HYBRID POLYMER HOSES



Model #	Sizes	Fitting Type
<b>HH48-025</b>	1/2" x 25ft.	Solid Fitting
<b>HH48-050</b>	1/2" x 50ft.	Solid Fitting
<b>HH48-100</b>	1/2" x 100ft.	Solid Fitting



- ✓ Comes with 1/2" MPT solid crimped fitting & black PE boots on both ends
- ✓ Temperature range -40°F to 150°F
- ✓ Working pressure 300 PSI
- ✓ Safety factor 4:1





## INTERSTATE PNEUMATICS RHINO RUBBER HOSES

Interstate Pneumatics Rhino rubber is a synthetic rubber hose with great durability and excellent color stability, outstanding resistance to severe weather conditions, heat & ozone. The fiber reinforced hose is designed for a service pressure of 300 PSI with a safety factor of four; 1200 PSI burst pressure. Pre-cut lengths have solid brass 1/4" MPT fittings, ferrules and protective boots.

## RED RUBBER HOSES



Model #	Size
<b>HA44-025E</b>	1/4" x 25ft.
<b>HA44-050E</b>	1/4" x 50ft.
<b>HA44-100E</b>	1/4" x 100ft.
<b>HA46-025E</b>	3/8" x 25ft.
<b>HA46-050E</b>	3/8" x 50ft.
<b>HA46-100E</b>	3/8" x 100ft.
<b>HA48-025E</b>	1/2" x 25ft.
<b>HA48-050E</b>	1/2" x 50ft.
<b>HA48-100E</b>	1/2" x 100ft.

Model #	Size
<b>HA44-025EH44</b>	1/4" x 25ft.
<b>HA44-050EH44</b>	1/4" x 50ft.
<b>HA44-100EH44</b>	1/4" x 100ft.
<b>HA46-050H46</b>	3/8" x 50ft.
<b>HA46-050H46B</b>	3/8" x 100ft.
<b>HA46-025EBS</b>	3/8" x 25ft.
<b>HA46-050EBS</b>	3/8" x 50ft.
<b>HA46-100EBS</b>	3/8" x 100ft.

Fitting Type
Steel Coupler & Plug (Industrial)
Steel Coupler & Plug (Industrial)
Steel Coupler & Plug (Industrial)
Brass Coupler & Steel Plug (Industrial)
Brass Coupler & Plug (Industrial)
Swivel Connector
Swivel Connector
Swivel Connector



Spools	
Model #	Size
<b>HA19-400E</b>	3/4" x 400ft.
<b>HA20-400</b>	1" x 400ft.
<b>HA44-600E</b>	1/4" x 600ft.
<b>HA46-600E</b>	3/8" x 600ft.
<b>HA48-600E</b>	1/2" x 600ft.



- ✓ Temperature range -40°F to 180°F
- ✓ Working pressure 300 PSI @ 70°F
- ✓ Safety factor 4:1



Model #	Description
<b>BA44</b>	Boot for HA44 1/4" Hose
<b>BA46</b>	Boot for HA46 3/8" Hose



## Hose Whips

Model #	Sizes
<b>HA44-01HB</b>	1/4" x 1ft.
<b>HA44-06ES</b>	1/4" x 6ft.
<b>HA44-012ES</b>	1/4" x 12ft.
<b>HA44-025ES</b>	1/4" x 25ft.

Model #	Sizes	Fitting Type
<b>HA44-03EBS</b>	1/4" x 3ft.	Swivel Connector
<b>HA44-06EBS</b>	1/4" x 6ft.	Swivel Connector
<b>HA44-015EBS</b>	1/4" x 15ft.	Swivel Connector
<b>HA46-03EBS</b>	3/8" x 3ft.	Swivel Connector

Additional whip sizes & hose types are available upon request.



## YELLOW RUBBER HOSES



Model #	Size
<b>HA54-025E</b>	1/4" x 25ft.
<b>HA54-050E</b>	1/4" x 50ft.
<b>HA54-100E</b>	1/4" x 100ft.
<b>HA56-025E</b>	3/8" x 25ft.
<b>HA56-050E</b>	3/8" x 50ft.
<b>HA56-100E</b>	3/8" x 100ft.
<b>HA56-600E</b>	3/8" x 600ft. (Spool)
<b>HA58-025E</b>	1/2" x 25ft.
<b>HA58-050E</b>	1/2" x 50ft.
<b>HA58-100E</b>	1/2" x 100ft.
<b>HA58-600E</b>	1/2" x 600ft. (Spool)



- ✓ Temperature range -40°F to 180°F
- ✓ Working pressure 300 PSI @ 70°F
- ✓ Safety factor 4:1



Model #	Description
<b>BA56</b>	Boot for HA56 3/8" Yellow Hose



## BLACK RUBBER HOSES



Model #	Size
<b>HA66-025E</b>	3/8" x 25ft.
<b>HA66-050E</b>	3/8" x 50ft.
<b>HA66-100E</b>	3/8" x 100ft.
<b>HA66-600E</b>	3/8" x 600ft. (Spool)



- ✓ Temperature range -40°F to 180°F
- ✓ Working pressure 300 PSI @ 70°F
- ✓ Safety factor 4:1



## 1/4" BLACK STEEL BRAIDED RUBBER HOSE W/ REEL



Model #	Size
<b>HA84-450</b>	1/4" x 450ft. (Spool)

- ✓ Temperature range -40°F to 180°F
- ✓ Working pressure 600 PSI @ 70°F
- ✓ Safety factor 4:1



### RHINO RUBBER JACK HAMMER HOSES

Red & Yellow Jack hammer hose made by **Interstate Pneumatics Rubber** has a service operating pressure of 300 PSI & a burst pressure of 1200 PSI. This hose comes standard with a 3/4" Universal Twist-Lock. Twist-Lock Couplings that are secured by a steel ferrule or two metal bands.



Model #	Sizes	Color
<b>HJ19-050E</b>	3/4" x 50ft.	Red
<b>HJ19-100E</b>	3/4" x 100ft.	Red
<b>HJ59-050E</b>	3/4" x 50ft.	Yellow
<b>HJ59-100E</b>	3/4" x 100ft.	Yellow

**HJ19-050HC** 3/4" x 50ft. Red  
(comes with steel hose clamp installed)

**HJ19-400E** 3/4" x 400ft. (Red Spool)



- ✓ Temperature range -65°F to 180°F
- ✓ Service operating pressure 300 PSI
- ✓ Safety factor 4:1

### JACK HAMMER UNIVERSAL TWIST LOCK FITTINGS

The cast carbon steel-zinc coated twist-lock fittings are normally threaded onto a pipe, threaded hose end or manifold which joins to a rubber hose assembly which is connected or disconnected regularly.

#### STRAIGHT THROUGH FEMALE THREADED JACK HAMMER COUPLER



Model #	Sizes
<b>CU-800</b>	1/2" FPT
<b>CU-850</b>	3/4" FPT
<b>CU-900</b>	1" FPT

#### STRAIGHT THROUGH MALE THREADED JACK HAMMER COUPLER



Model #	Sizes
<b>CU-801</b>	1/2" MPT
<b>CU-851</b>	3/4" MPT
<b>CU-901</b>	1" MPT

#### STRAIGHT THROUGH HOSE BARB JACK HAMMER COUPLER



Model #	Sizes
<b>CU-803</b>	1/2" Hose Barb
<b>CU-853</b>	3/4" Hose Barb
<b>CU-903</b>	1" Hose Barb

#### JACK HAMMER UNIVERSAL COUPLING WITH TRIPPLE CONNECTIONS



Model #	Sizes
<b>CU-905</b>	1/2" NPT

### JACK HAMMER HOSE SAFETY CABLE



Model #	Sizes
<b>CU-SC2014</b>	1/2" to 1-1/4" Hose ID, 1/8" Steel Double Loop Cable 20" length
<b>CU-SC2414</b>	1-1/2" to 3" Hose ID, 1/4" Steel Double Loop Cable 24" length
<b>CU-SC3814</b>	1-1/2" to 3" Hose ID, 1/4" Steel Double Loop Cable 38" length

### JACK HAMMER HOSE CU COUPLER SAFETY PIN & RUBBER GASKET



**CU-P** Coupler Safety Pin



**CU-R** Coupler Rubber Gasket



## PROFESSIONAL GRADE RETRACTABLE HOSE REEL



**Model # HSR80-4**  
1/4" x 50 Ft x 1/4" NPT End


**Model # HSR80-64**  
3/8" x 50 Ft x 1/4" NPT End

**Model # HSR80-64B**  
3/8" x 50 Ft x 1/4" NPT End,  
Black Rhino Rubber Hose

**Model # HSR80-66**  
3/8" x 50 Ft x 3/8" NPT End



**Model # HSR80**  
3/8" Heavy Duty Hose Rewind  
Reel Only

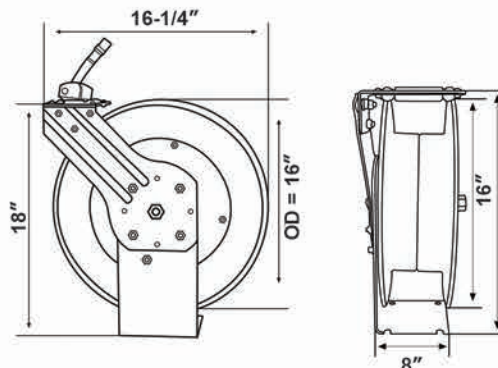


**Model # HSR90-86**  
1/2" x 50 Ft x 3/8" NPT End

**Model # HSR90-88**  
1/2" x 50 Ft x 1/2" NPT End



**Model # HSR90**  
1/2" Heavy Duty Hose Rewind  
Reel Only

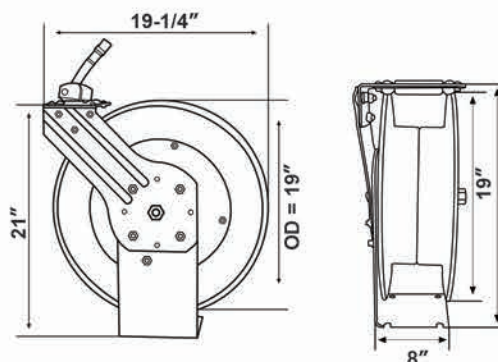

**Model # HSR95-88**  
Heavy Duty Retractable  
Hose Reel with 1/2" x  
50 feet Rubber Hose



300 PSI W.P. Red Rubber Rhino Hose - Made in Taiwan. Heavy Gauge Steel Construction for Professional Use, Stronger Rewind Spring Design for High Pressure Applications & PTFE Seals.



HSR90 PARTS				
Swivel Mount	Roller Guide	Swivel Fitting	Retractable Spring Assembly	Rubber Stopper
				
<b>HSR90-SB</b>	<b>HSR90-RG</b>	<b>HSR90-SWA-1/2"</b> <b>HSR90-SWA6-3/8"</b>	<b>HSR90-SA</b>	<b>HSR90-RS4 - 1/4" Hose</b> <b>HSR90-RS6 - 3/8" Hose</b> <b>HSR90-RS8 - 1/2" Hose</b>
Spring Guard	Clamp	Locking Cam Assembly	Thick Roller Guides	Swivel Assembly Bolt
				
<b>HSR90-SG</b>	<b>HSR90-CL</b>	<b>HSR90-CA</b>	<b>HSR90-TR</b>	<b>HSR90-SWB</b>

Swivel mount is an additional accessory and is not part of Hose Reel. Spare parts available (swivel fitting, retractable spring module, rubber stopper, hose)

HSR80 PARTS			
Swivel Mount	Roller Guide	Swivel Fitting	Rubber Stopper
			
<b>HSR90-SB</b>	<b>HSR80-RG</b>	<b>HSR90-SWA-1/2"</b> <b>HSR90-SWA6-3/8"</b>	<b>HSR90-RS4 - 1/4" Hose</b> <b>HSR90-RS6 - 3/8" Hose</b> <b>HSR90-RS8 - 1/2" Hose</b>
Spring Guard	Thick Roller Guides		Swivel Assembly Bolt
			
<b>HSR80-SG</b>	<b>HSR90-TR</b>		<b>HSR90-SWB</b>

Swivel mount is an additional accessory and is not part of Hose Reel. Spare parts available (swivel fitting, retractable spring module, rubber stopper, hose)



## GRADE "R" TWIN GAS WELDING HOSES



### Construction:

- Tube: Black EPDM
- Reinforcement: Multiple textile plies
- Cover: Red (acetylene) & Green (oxygen) EPDM; smooth finish
- Temp. Range: -40°F to +180°F (-40°C to +80°C)
- Design Factor: 4:1
- Coupled Assemblies: Female welding stem and nut type "B" on each end.

Model #	Grade	Length	ID	Max W.P.
<b>HW44-025</b>	Grade-R	25 Ft.	1/4"	200 PSI
<b>HW44-050</b>	Grade-R	50 Ft.	1/4"	200 PSI
<b>HW44-100</b>	Grade-R	100 Ft.	1/4"	200 PSI
<b>HWR-1450R</b>	Grade-R	50 Ft.	1/4"	200 PSI

## GRADE "T" TWIN GAS WELDING HOSES



### Construction:

- Tube: Black chloroprene
- Reinforcement: Multiple textile plies
- Cover: Green (oxygen) or Red (fuel gas) chloroprene; smooth finish
- Temp. Range: -40°F to +180°F (-40°C to +80°C)
- Design Factor: 4:1
- Applications: Red: Acetylene, hydrogen, natural gas, propane, propylene. Green: Oxygen
- Coupled Assemblies: Female welding stem and nut Type "B" on each end

Model #	Grade	Length	ID	Max W.P.
<b>HW44-025T</b>	Grade-T	25 Ft.	1/4"	200 PSI
<b>HW44-050T</b>	Grade-T	50 Ft.	1/4"	200 PSI
<b>HW44-100T</b>	Grade-T	100 Ft.	1/4"	200 PSI
<b>HWR-1450T</b>	Grade-T	50 Ft.	1/4"	200 PSI

## GRADE "R" TWIN GAS WELDING HOSE REEL



### HWR-1450R

#### Specifications:

- Reel Material: Heavy-Duty Steel
- Hose Material: Synthetic Rubber
- Hose Length: 50 Feet
- Hose I.D.: 1/4"
- Design Factor: 4:1
- Temperature Range: -40°F to 180°F
- Operating Pressure: 200 PSI
- Hose Grade: R (for oxy-acetylene welding and cutting)
- Gas Compatibility: Oxygen and Acetylene
- Fittings: Brass B-Size 9/16"-18 Thread

## GRADE "T" TWIN GAS WELDING HOSE REEL



### HWR-1450T

#### Specifications:

- Reel Material: Heavy-Duty Steel
- Hose Material: Synthetic Rubber
- Hose Length: 50 Feet
- Hose I.D.: 1/4"
- Design Factor: 4:1
- Temperature Range: -40°F to 180°F
- Operating Pressure: 200 PSI
- Hose Grade: T (for oxy-acetylene welding and cutting)
- Gas Compatibility: Acetylene, Hydrogen, Natural Gas, Propane, Propylene, and Oxygen
- Fittings: Brass B-Size 9/16"-18 Thread



Model Series	Description	Ferrule	Barb End	Boot	Splicer	Repair End	Hose Clamp
HA04	1/4" Translucent-Red PVC Hose (1/4" NPT)	F4750 F7322	FM44 FBS44	HB14SW	FBS44	FM44 FBS44	H580, H613
HA36	3/8" Translucent-Red PVC Hose (1/4" NPT)	F7326	FM46	BA56	FBS66	FM46	H580, H615
HA06	3/8" Blue PVC Hose (1/4" NPT)	F7326	FM46	BA56	FBS66	FM46	H580, H615
HA14	1/4" Translucent-White PVC Hose (1/4" NPT)	F4750 F7322	FM44	BA44	FBS44	FM44	H580, H613
HA16	3/8" Translucent-White PVC Hose (1/4" NPT)	F7326	FM46	BA56	FBS66	FM46	H580, H615
HA26	3/8" Solid Orange PVC Hose (1/4" NPT)	F7326 F0626	FM46	BA56	FBS66	FM46	H580, H615
HA44	1/4" Red Rubber Hose (1/4" NPT)	F7325	FM44	BA44	FBS44	FM44	H580, H615
HA46	3/8" Red Rubber Hose EPDM (1/4" NPT)	F7329	FM46	BA56	FBS66	FM46	H580, H618
HA48	1/2" Red Rubber Hose (1/2" NPT)	F5029A	FM88	n/a	FBS88	FM88	H581
HA54	1/4" Yellow Rubber Hose (1/4" NPT)	F0626 F7325	FM44	BA44	FBS44	FM44	H580, H615
HA56	3/8" Yellow Rubber Hose EPDM (1/4" NPT)	F7329	FM46	BA56	FBS66	FM46	H580, H618
HA58	1/2" Yellow Rubber Hose (1/2" NPT)	F5029A	FM88	n/a	FBS88	FM88	H581
HA66	3/8" Black Rubber Hose (1/4" NPT)	F7329	FM46	BA56	FBS66	FM46	H580, H618
HA84	1/4" Black Steel-Braided Rubber Hose	F7325, F7326	FM44	BA44	FBS44	FM44	H580, H615
HJ19	3/4" Jack Hammer Red Rubber Hose	n/a	CU-853	n/a	n/a	CU-853	H719-9, H582
HJ59	3/4" Jack Hammer Yellow Rubber Hose	n/a	CU-853	n/a	n/a	CU-853	H719-9, H582
	1" Jack Hammer Rubber Hose	n/a	CU-903	n/a	n/a	CU-903	H719-9
HU14	1/4" Light Blue Polyurethane Hose (1/4" NPT)	F4250	FM44	HB14SW	HRPZ24-00	HRPZ24-1, HRPZ24-01	H611 n/a
HU16	3/8" Light Blue Polyurethane Hose (1/4" NPT)	F7326	FM46	n/a	HRPZ26-00	n/a	H615
HR14	1/4" Recoil Yellow Polyurethane Hose with Swivel Fittings (1/4" NPT)	n/a	n/a	n/a	n/a	HRPZ24-0	H611
HCG	3/4" PVC Green Garden Hose	F5029A	FGM312	n/a	n/a	FGM312	H582



## HOSE ACCESSORIES

## REUSABLE BRASS FITTINGS

**INTERSTATE PNEUMATICS** Reusable Brass Fittings are attached to the hose with a threaded connection. **Interstate Pneumatics** also offers In-line fittings in case the hose needs replacement somewhere in the middle instead of being at the ends for field repair. IP reusable fittings are available as swivel/non-swivel. Swivel fittings are specially designed to work on Interstate Pneumatics HR & PU series hoses.

## REUSABLE IN-LINE REPAIR FITTING



Model #  
**HRPZ24-00** Hose Size  
**HRPZ26-00** 3/8" Hose

## REUSABLE NON-SWIVEL FITTING



Model #  
**HRPZ24-01** NPT Hose Size  
**HRPZ26-01** 1/4" NPT 1/4" Hose  
**HRPZ26-06** 3/8" NPT 3/8" Hose

REUSABLE SWIVEL FITTING 1/4" HR SERIES  
PU RECOIL HOSE

Model #  
**HRPZ24-0** NPT Size  
1/4"

REUSABLE SWIVEL FITTING 1/4" HU  
SERIES PU HOSE

Model #  
**HRPZ24-1** NPT Size  
1/4"

## REUSABLE SOLID IN-LINE SPLICER



Model #  
**HRPZ55-00** Hose Size  
5/16" Hose

## REUSABLE SOLID HOSE-END FITTING



Model # **HRPZ55-01**  
5/16" Reusable Solid Hose-End Fitting  
With 1/4" NPT Male Ends

## REUSABLE REPAIR FITTING



Model # **CHZ44-0**  
1/4" Industrial Coupler  
Body x 1/4" Reusable  
Repair Fitting



Model # **CPHZ44-0**  
1/4" Industrial Plug  
Body x 1/4" Reusable  
Repair Fitting

## HOSE REUSABLE END BRASS FITTING KIT

1/4" NPT HU HOSE REUSABLE END  
BRASS FITTING KIT

Model # **HRPZ24-K1**  
Kit Includes:  
2 x HRPZ24-00 - Non Swivel Fitting  
2 x HRPZ24-01 - Non Swivel Fitting  
2 x HRPZ24-1 - Swivel Fitting

1/4" NPT HU HOSE REUSABLE END  
BRASS FITTING KIT

Model # **HRPZ24-K3**  
Kit Includes:  
1 x HRPZ24-01 - Non Swivel Fitting  
1 x HB14SW - 1/4 Inch Rubber Boot  
for Light Blue Polyurethane Hose  
Only

1/4" NPT HU HOSE REUSABLE END  
BRASS FITTING KIT

Model # **HRPZ24-K2**  
Kit Includes:  
1 x HRPZ24-1 - Non Swivel Fitting  
1 x HB14SW - 1/4 Inch Rubber Boot  
for Light Blue Polyurethane Hose  
Only

3/8" NPT HU HOSE REUSABLE END  
BRASS FITTING KIT

Model # **HRPZ26-K1**  
Kit Includes:  
2 x HRPZ26-00 - Non Swivel Fitting  
2 x HRPZ26-01 - Swivel Fitting



## CRIMPING TOOLS

**Interstate Pneumatics** Crimping Tools are designed for use with standard brass ferrules for permanent hose assembly and repairs. H-1, H-4, H-5, H-6 and H-8 feature the exclusive 'Nipple Jaw' design that makes a 'Groove Lock' crimp which results in a much stronger hold with no sharp edges on the ferrule. The H8 has five dies and is ideal for bench mounting.

## STRAIGHT HAMMER/VICE TYPE CRIMPING TOOL



Model #	Description
<b>H1</b>	2 Opening 2 Dies for 3/16" & 1/4" Hose Die O.D. = 0.420" / 0.550"

## V-GRIP TYPE CRIMPING TOOL



**H4**  
3 Opening 3 Dies for  
8, 9, & 11mm Hose O.D.  
(1/8", 3/16" Hose ID)



**H5**  
Opening 2 Dies for  
5/16" & 1/4" Hose  
Die O.D. = 0.625" / 0.560"



**H6**  
2 Opening 2 Dies  
for 1/4" & 3/8" Hose  
Die O.D. = 0.560" / 0.725"



## HEAVY DUTY CRIMPING TOOL WITH 5 DIES



### H8 - Heavy Duty Standard Hose Crimper with 5 Dies

Heavy Duty Standard Hose Crimper is designed for hose assembly or repair, whether in shops or out in the field. Built with cast iron and featuring heat-treated dies, it offers exceptional strength and durability.

#### Comes with five dies for crimping:

Die sizes: 0.41", 0.47", 0.52", 0.57", 0.64"

These dies are universally compatible with other brands and can crimp single or double braided PVC and rubber hoses ranging from 1/4" to 3/8" I.D. The cast iron unit also features mounting holes for secure, permanent benchtop installation.

## STRAIGHT JAW EAR CLAMP PINCERS



### H11 - Standard Jaw Ear Clamp Pincers

Straight-jaw pincers for use with ear-type clamps in hose fitting installation and removal. Tool acts at 90-degree angle to ear clamp for use where space is limited. Clamps or cuts ear clamps that secure hose fittings. Forged steel construction for strength and durability. Rubber-coated handles for ease of use and sure hold.

## CRIMPING DIE



**H8-DIE1**  
#1, FOR H8



Model #  
**H8-DIE2** #2, FOR H8  
**H8-DIE3** #3, FOR H8  
**H8-DIE4** #4, FOR H8  
**H8-DIE5** #5, FOR H8



Model #  
**H8-DIE6** #6, FOR H8




## MANUAL-BENCHTOP HYDRAULIC CRIMPER

2 PIECE  
HANDLE

This heavy-duty hydraulic crimper is very portable and ideal for shop and field applications. Open design accommodates a wide range of hose and fitting types. Open design provides excellent operator visibility.

Model #	Description
<b>H10-4</b>	<b>1/4" &amp; 5/16" HOSE CRIMPER</b> for crimping 1/4" & 5/16" PVC & Rubber Hoses
<b>H10-6</b>	<b>3/8" &amp; 1/2" HOSE CRIMPER</b> for crimping 3/8" & 1/2" PVC Hoses
<b>H10-8</b>	<b>1/2" &amp; 3/4" HOSE CRIMPER</b> for crimping 1/2" & 3/4" PVC & Rubber Hoses

CRIMPER DIE



**H10-Handle** Die Handle for Bench top Air Hose Crimper

- Ideal for small production
- Economical compact design
- Solid steel construction
- Six-piece die design for a perfect looking crimp
- Base plate holes to bolt down for bench use
- Two-piece handle included



CRIMPED ENDS

## DIE SPRING



Model #	Description
<b>H10-SPRING</b>	Die Spring for Bench top Hydraulic Jack Hose Crimper

## DIE SET FOR H10



Model #	Description
<b>H10-DIE4</b>	1/4" to 5/16" Die Set
<b>H10-DIE6</b>	3/8" to 1/2" Die Set
<b>H10-DIE8</b>	1/2" Die Set

H13 - 3/8" CV JOINT BOOT CLAMP  
CRIMPER WITH CUTTER

This tool is essential for fixing CV boots. With a built in cutter and ratcheting winding mechanism the banding can be tightened and cut quickly and effectively.

H14 - RATCHETING STYLE CENTER  
PUNCH HAND TOOL 5/8" CRIMPER

Center Punch Clamp Tensioner. Use this Ratcheting action tensioning center punch 5/8" tool crimper to install push lock preformed clamps on large hoses.

## H15 - STAINLESS STEEL STRAPPING &amp; BANDING TOOL



Stainless Steel Strapping & Banding Tool. Extra heavy duty production model with a premium tension handle, spring loaded gripper, built-in cutter and screw rod for added torque and durability. Steel strapping, banding, crimping and cutting tool that serves a wide variety of applications - 1/4" to 1" wide Strap. Delivers up to 2400 lbs. of torque. Available in a silver rust resistant finish.

**Note:** Should be used by a trained person.



## BRASS FERRULES

**Interstate Pneumatics** Brass Hose Ferrules, when used with a crimping tool and a standard hose barb fitting, are designed for permanent hose assembly and repairs. Select ferrule with Inside Diameter (I.D.) slightly larger than Outside Diameter (O.D.) of hose. Place ferrule on hose, insert standard hose barb fitting and crimp.



**12 Ferrules in a  
See Through Clear Clamshell**

Model No.	Size ID x Length
<b>F0622-12</b>	0.380" ID x 0.500"
<b>F0626-12</b>	0.375" ID x 0.488"
<b>F4250-12</b>	0.400" ID x 0.710"
<b>F0769-12</b>	0.450" ID x 0.550"
<b>F4750-12</b>	0.478" ID x 0.688"
<b>F7319-12</b>	0.375" ID x 0.718"
<b>F7321-12</b>	0.438" ID x 0.718"
<b>F7322-12</b>	0.500" ID x 1.0"
<b>F7323-12</b>	0.525" ID x 1.0"
<b>F7324-12</b>	0.531" ID x 1.0"
<b>F7325-12</b>	0.562" ID x 1.0"
<b>F7326-12</b>	0.593" ID x 1.0"
<b>F7327-12</b>	0.625" ID x 1.0"
<b>F7328-12</b>	0.656" ID x 1.0"
<b>F7329-12</b>	0.687" ID x 1.0"
<b>F7330-12</b>	0.718" ID x 1.0"
<b>F7331-12</b>	0.750" ID x 1.0"
<b>F7332-12</b>	0.781" ID x 1.0"
<b>F7333-12</b>	0.812" ID x 1.0"
<b>F5029A-12</b>	0.900" ID x 0.875"
<b>F7242A-12</b>	0.937" ID x 0.844"
<b>F4750L-12</b>	0.478" ID x 1.0"



**50 Ferrules in a  
See Through Clear Clamshell**

**1000 Pcs Box Quantities  
are also available for all the  
above sizes upon special request**

Model No.	Size ID x Length
<b>F0622-50</b>	0.380" ID x 0.500"
<b>F0626-50</b>	0.375" ID x 0.488"
<b>F0769-50</b>	0.450" ID x 0.550"
<b>F4250-50</b>	0.400" ID x 0.710"
<b>F4750-50</b>	0.478" ID x 0.688"
<b>F7319-50</b>	0.375" ID x 0.718"
<b>F7321-50</b>	0.438" ID x 0.718"
<b>F7322-50</b>	0.500" ID x 1.0"
<b>F7323-50</b>	0.525" ID x 1.0"
<b>F7324-50</b>	0.531" ID x 1.0"
<b>F7325-50</b>	0.562" ID x 1.0"
<b>F7326-50</b>	0.593" ID x 1.0"
<b>F7327-50</b>	0.625" ID x 1.0"
<b>F7328-50</b>	0.656" ID x 1.0"
<b>F7329-50</b>	0.687" ID x 1.0"
<b>F7330-50</b>	0.718" ID x 1.0"
<b>F7331-50</b>	0.750" ID x 1.0"
<b>F7332-50</b>	0.781" ID x 1.0"
<b>F7333-50</b>	0.812" ID x 1.0"
<b>F5029A-50</b>	0.900" ID x 0.875"
<b>F7242A-50</b>	0.937" ID x 0.844"
<b>F4750L-50</b>	0.478" ID x 1.0"



## HOSE REPAIR KITS

H6FK 33 PIECE RHINO RUBBER /  
CRIMPER / FERRULE REPAIR KIT

This Kit can be used to repair 1/4" & 3/8" Rhino Rubber Hoses.

## Kit Includes:

- FM44** - 1/4" MPT x 1/4" Hose Barb Male (04)
- FM46** - 1/4" MPT x 3/8" Hose Barb Male (04)
- FBS44** - 1/4" Brass Hose Barb Splicer (04)
- FBS66** - 3/8" Brass Hose Barb Splicer (04)
- F7326** - 0.593" ID x 1.0" Ferrules (08)
- F7330** - 0.718" ID x 1.0" Ferrules (08)
- H6** - V-Grip type Crimping Tool - 2 Dies for 3/8" + 1/4" Hose (01)

Comes in a Plastic Reusable Case.

H60FK ASSORTED 60 PCS  
STAINLESS STEEL HOSE CLAMPS KIT

## Kit Includes:

- (1) 18 Compartments Plastic Storage Box Case (Large)
- (10) 3604 #4 7/32" to 5/8"
- (10) 64006H #6 7/16" to 25/32"
- (10) 64008H #8 1/2" to 29/32"
- (10) 64010H #10 9/16" to 1-1/16"
- (10) 64012H #12 1/16" to 1-1/4"
- (5) 64016H #16 13/16" to 1-3/4"
- (5) 64020H #20 13/16" to 1-3/4"

H8-KIT HEAVY-DUTY BENCH CRIMPER  
WITH FERRULES

## Kit Includes:

- H8**  
Heavy-Duty Bench Crimper
- F7327**  
Length: 1.0"  
I.D: 0.625"  
Hole: 0.437"  
Wall Thickness: 0.025"  
50 per Pack
- F7328**  
Length: 1.0"  
I.D: 0.656"  
Hole: 0.437"  
Wall Thickness: 0.025"  
50 per Pack

H8-KIT1 HEAVY-DUTY BENCH CRIMPER  
WITH FERRULES

## Kit Includes:

- H8**  
Heavy-Duty Bench Crimper
- F7328**  
Length: 1.0"  
I.D: 0.656"  
Hole: 0.437"  
Wall Thickness: 0.025"  
50 per Pack
- F7330**  
Length: 1.0"  
I.D: 0.718"  
Hole: 0.500"  
Wall Thickness: 0.025"  
50 per Pack



## HOSE REPAIR KITS

### H4RK HOSE REPAIR KIT (FOR 1/4" ID HOSE)



#### Kit Includes:

- FBS44** - (1) 1/4" Brass Hose Barb Splicer
- FM44** - (1) 1/4" MPT x 1/4" Hose Barb Male
- H580** - (3) 1/4" x 5/8" O.D. Stainless Steel Hose Clamp

### H6RK HOSE REPAIR KIT (FOR 3/8" ID HOSE)



#### Kit Includes:

- FBS66** - (1) 3/8" Brass Hose Barb Splicer
- FM46** - (1) 1/4" MPT x 3/8" Hose Barb Male
- H581W** - (3) 7/16" x 1" O.D. Stainless Steel Hose Clamp

### H4FK HOSE REPAIR KIT WITH CRIMP TOOL (FOR 3/16", 1/4" ID HOSE)



#### Kit Includes:

- H4** - V-Grip Type Crimper Tool - 3 Dies
- FM44** - (6) 1/4" Hose Barb x 1/4" NPT Male End
- FBS44** - (6) 1/4" Hose Splicer Barb
- FF44** - (6) 1/4" Barb x 1/4" Female NPT End
- FMBS44** - (4) 1/4" Swivel Barb x 1/4" NPT Male End
- F7321-50** - 0.438" ID x 0.718" Long Ferrules (50/PK)
- PB40** - Plastic Service Kit Box

### H11FK AIR HOSE REPAIR KIT WITH DOUBLE EAR CLAMPS, CRIMPER, 1/4" HOSE BARBS



#### Kit Includes:

- H11** - (1) Pincher/Crimper
- H611** - (25) 9 to 11 mm
- H613** - (25) 11 to 13 mm
- FM44** - (6) 1/4" Hose Barb x 1/4" NPT Male End
- FBS44** - (6) 1/4" Hose Splicer Barb
- FF44** - (6) 1/4" Female NPT End



## HOSE CLAMPS (BAND W/SCREW)

**Interstate Pneumatics** Stainless Steel Hose Clamps are ideal for temporary assembly & rapid field-type repair of hoses. Clamps have Stainless Steel bands with plated Steel Screws.



Model No.	Width	Description
<b>H580</b>	7/16"	1/4" to 5/8" OD Hose Clamp
<b>H581</b>	7/16"	3/8" to 7/8" OD Hose Clamp
<b>H581W</b>	1/2"	7/16" to 1" OD Hose Clamp
<b>H582</b>	1/2"	1/2" to 1-1/4" OD Hose Clamp
<b>H583</b>	1/2"	3/4" to 1-3/4" OD Hose Clamp
<b>H584</b>	1/2"	1-5/16" to 2-1/4" OD Hose Clamp
<b>H585</b>	1/2"	1-13/16" to 2-3/4" OD Hose Clamp

## STAINLESS STEEL POWER GEAR CLAMPS WITH 410 STAINLESS STEEL HEX SCREW



## HEAVY DUTY

## Features:

- General purpose automotive and industrial clamps.
- High strength 4-piece Quadra-Lock construction.
- Use for all standard clamp applications.

<b>6520506</b>	#6 Hose Clamp (7/16" to 25/32") -10/PK
<b>6520508</b>	#8 Hose Clamp (1/2" to 29/32") -10/PK
<b>6520510</b>	#10 Hose Clamp (9/16" to 1-1/16") -10/PK
<b>6520512</b>	#12 Hose Clamp (11/16" to 1-1/4") -10/PK
<b>6520516</b>	#16 Hose Clamp (13/16" to 1-1/2") -10/PK
<b>6520520</b>	#20 Hose Clamp (13/16" to 1-3/4") -10/PK
<b>6520524</b>	#24 Hose Clamp (1-1/16" to 2") -10/PK
<b>6520528</b>	#28 Hose Clamp (1-5/16" to 2-1/4") -10/PK
<b>6520532</b>	#32 Hose Clamp (1-9/16" to 2-1/2") -10/PK
<b>6520536</b>	#36 Hose Clamp (1-13/16" to 2-3/4") -10/PK
<b>6520540</b>	#40 Hose Clamp (2-1/16" to 3") -10/PK
<b>6520544</b>	#44 Hose Clamp (2-5/16" to 3-1/4") -10/PK
<b>6520548</b>	#48 Hose Clamp (1-5/8" to 3-1/2") -10/PK
<b>6520552</b>	#52 Hose Clamp (2-9/16" to 3-1/2") -10/PK
<b>6520556</b>	#56 Hose Clamp (3-1/16" to 4") -10/PK
<b>6520560</b>	#60 Hose Clamp (3-5/16" to 4-1/4") -10/PK
<b>6520564</b>	#64 Hose Clamp (3-9/16" to 4-1/2") -10/PK
<b>6520572</b>	#72 Hose Clamp (4-1/16" to 5") -10/PK
<b>6520580</b>	#80 Hose Clamp (4-5/8" to 5-1/2") -10/PK
<b>6520588</b>	#88 Hose Clamp (5-1/8" to 6") -10/PK
<b>6520596</b>	#96 Hose Clamp (5-9/16" to 6-1/2") -10/PK
<b>6520597</b>	#104 Hose Clamp (6-3/16" to 7") -10/PK
<b>6520599</b>	#128 Hose Clamp (6-1/2" to 8-1/2") -10/PK



## STAINLESS STEEL CLAMPS WITH 410 STAINLESS STEEL HEX SCREW

## LIGHT DUTY



Model	SAE Size	Min	Max
6519500	4	7/32"	5/8"
6519502	6	7/16"	25/32"

## Features:

- A lightweight, streamlined clamp generally used in small diameter applications such as air & fuel lines.
- The streamlined configuration allows for installation in tight fitting or difficult to reach areas.
- This clamp creates high sealing pressure with only 10 to 15 in./lbs. of installation torque.

Note: Also available in 10/Box packaging

## HOSE CLAMPS (BAND W/SCREW)

## DOUBLE EAR CLAMPS



Model No.	Description
H609	1/4" to 3/8" OD Range
H611	3/8" to 7/16" OD Range
H613	7/16" to 1/2" OD Range
H615	1/2" to 9/16" OD Range
H618	9/16" to 11/16" OD Range

## PERFORMED CENTER PUNCH CLAMPS



5/8" Wide  
Stainless Steel Band

Model No.	Description
H719	Clamp for 3/4" Hose
H719-9	Clamp for 1" Hose

## CV BOOT BAND CLAMP ROUND TYPE



Width: 0.25"  
Thickness: 0.010"

Model No.	Dia Range
H910	1" to 3"
H920	1" to 5"

## CREATE A CLAMP KIT WITH 6 HOUSINGS



## 6519600

10Ft. strap gives you flexibility to create almost any size clamp you need. Use for all conventional wormdrive clamp applications as well as for mounting, securing, strapping and clamping

## Features:

- Stainless steel fasteners for resistance to scaling and corrosion
- Slotted hex-head screw allows installation using blade screwdriver or nut driver
- Adjustment screw saddle locks into band to help provide a uniform seal
- Worm gear mechanism for precise band adjustment

## Applications:

Plumbing, Ductwork, Maintenance, Hoses, Machinery, Marine, Laboratories, Roofing, Strapping, Automotive, Equipment, Vehicles, Farms, Industrial Plants



## PRESSURE RELIEF VALVES

**Interstate Pneumatics** Pressure relief valves are ASME certified safety devices which are designed to divert pressure in the event that a pressurized system of some kind encounters a problem which leads to a dangerous rise in pressure. Pressure relief valves are extremely useful, and required by law for safety reasons.

- **Body:** Brass
- **Spring:** Zinc plated steel
- **Seal:** Silicon rubber
- **Max Temp. Range:** 150°F



Model No.	Description	SCFM	Model No.	Description	SCFM
<b>V095-4</b>	1/4" MPT w/pull Ring - 95 PSI	54	<b>V150-4</b>	1/4" MPT w/pull Ring - 50 PSI	54
<b>V125-4</b>	1/4" MPT w/pull Ring - 125 PSI	45	<b>V165-4</b>	1/4" MPT w/pull Ring - 165 PSI	54
<b>V140-4</b>	1/4" MPT w/pull Ring - 140 PSI	45	<b>V165-8</b>	1/8" MPT w/pull Ring - 165 PSI	54
<b>V140-8</b>	1/8" MPT w/pull Ring - 140 PSI	45	<b>V200-4</b>	1/4" MPT w/pull Ring - 200 PSI	62

## BALL VALVES - BRASS

**Interstate Pneumatics** Ball Valves feature forged brass bodies to provide extended service life and resistance to damage caused by extreme temperature applications. Inert PTFE seats and seals provide excellent corrosion resistance. Long handle allows more leverage for easy on/off operation.

- **Handle:** Steel with rubber coating
- **Valve body:** Forged brass
- **Seals:** PTFE
- **Stem:** Brass



Model No.	Inlet Thread	Outlet Thread	Working Pressure
<b>VB04</b>	1/4" FPT	1/4" FPT	600 PSI
<b>VB06</b>	3/8" FPT	3/8" FPT	600 PSI
<b>VB08</b>	1/2" FPT	1/2" FPT	600 PSI
<b>VB12</b>	3/4" FPT	3/4" FPT	600 PSI
<b>VB16</b>	1" FPT	1" FPT	600 PSI
<b>6416035</b>	1-1/4" FPT	1-1/4" FPT	600 PSI
<b>6416036</b>	1-1/2" FPT	1-1/2" FPT	600 PSI
<b>6416036</b>	2" FPT	2" FPT	600 PSI

## BALL VALVES



Model No	Inlet Thread	Outlet Thread
<b>VB440</b>	1/4" FPT	1/4" MPT
<b>VB660</b>	3/8" FPT	3/8" MPT
<b>VB880</b>	1/2" FPT	1/2" MPT



Model No	Description
<b>9423001</b>	1/8" FIP x 1/8" FIP
<b>9423002</b>	1/4" FIP x 1/4" FIP
<b>9423003</b>	3/8" FIP x 3/8" FIP

## IN-LINE BLEED VALVE



**Interstate Pneumatics** All brass construction with 1/4" in-line adjustable bleed valve. Rated at 225 PSI service operating pressure.

Model No	Inlet Thread	Outlet Thread
<b>VR440</b>	1/4" MPT	1/4" FPT

## TIMED ELECTRIC AUTO DRAIN VALVE



**Model No: VDA-140**  
Timed Electric Auto Drain Valve, 1/4" NPT 110 Volts

## CABLE OPERATED AIR TANK DRAIN VALVE



**Model No: VP44**  
Cable Operated Air Tank Drain Valve, 1/4" Male NPT with 5ft Cable

## COMPACT BALL VALVE 'Y' STRAINER



**Model No: VP48**  
1/2" x 1/4" MPT Compact Ball Valve 'Y' Strainer Combination (Male to Male) 600 PSI



## 2 WAY LEVER VALVES



**Interstate Pneumatics** 2 Way Lever action Valve features chrome plated die cast bodies, brass working parts and Buna-N (Nitrile) O-Rings. Rated at 225 PSI service operating pressure.

Model No	Inlet Thread	Outlet Thread
<b>VL700</b>	1/4" FPT	1/4" FPT



**Radiator Faucet  
with Rubber Nozzle**

**Interstate Pneumatics** Radiator faucet has chrome-plated body with brass internal parts for strength and durability. The molded rubber nozzle with a 90° rubber tip provides resistance to shocks resulting from high pressure. The faucet has a lever controlled valve to maintain flow rate.

Model No	Inlet Thread
<b>RF40</b>	1/4" FPT



**Radiator Faucet  
with Garden Hose Female Inlet**

**Interstate Pneumatics** Radiator faucet has Brass - Excellent strength & durability, corrosion resistance, good bearing properties, low magnetic permeability

Model No	Inlet Thread
<b>RF41</b>	1/4" FPT

## DRAIN COCK VALVES



**Knurled Knob**

**Interstate Pneumatics** Drain Cock Valve features solid brass construction and an internal seal design for a positive metal to O-Ring seal. Ideal for use in a variety of draining and bleeding applications. Maximum operating pressure 225 PSI.

Model No	Description
<b>VP42</b>	1/4" MPT - Knurled Knob Type



**Wing Flange**

**Interstate Pneumatics** Wing Flange Drain Cock Valve with a Zinc plated handle has external seal design for a positive metal to metal seal. Ideal for use in a variety of draining and bleeding applications. Maximum operating pressure 225 PSI.

Model No	Description
<b>VP21</b>	1/8" MPT - Wing Flange Type
<b>VP41</b>	1/4" MPT - Wing Flange Type



## MINI DRAIN VALVE

**Interstate Pneumatics** 1/4" Mini Drain Valve for Air Compressors. Just install this drain valve in your compressor and prevent water and air leakage. Maximum operating pressure 225 PSI.

Model No	Inlet Thread	Outlet Thread
<b>VP40</b>	1/4" FPT	1/4" MPT
<b>VP40B</b>	1/4" FPT	1/4" MPT



VP40



VP40B

## BRASS BUTTON VALVE



**Interstate Pneumatics** Button Valve features solid brass construction, and Buna-N (Nitrile) seals. Normal valve position is closed. Ideal for air and liquid lines operating at up to 225 PSI working pressure.

Model No	Inlet Thread	Outlet Thread
<b>VBT44</b>	1/4" FPT	1/4" FPT

## IN-LINE NEEDLE VALVES

**Interstate Pneumatics** In-Line Needle Valves control gas flow from shutoff to full system flow. Solid brass construction for durability. Available with or without 1-1/2" x 160 PSI gauge. Maximum service operating pressure 225 PSI.

w/o Gauge



Model No.	Inlet Thread	Outlet Thread
<b>VR160</b>	1/4" FPT	1/4" MPT

w Gauge



Model No.	Inlet Thread	Outlet Thread
<b>VR161</b>	1/4" FPT	1/4" MPT

## TANK VALVES

The Tank valves have all brass construction. Tank valve find their applications in pneumatics storage tanks.

**VT2** Standard valve core & sealing cap with 1/8" NPT**VT4** Standard valve core & sealing cap with 1/4" NPT



## PUSH BUTTON BLEEDER VALVE



**Interstate Pneumatics** Bleeder valve provides simple push-button bleeding for compressed air and liquid systems. Plated steel construction provides excellent corrosion resistance. Pressure rating 225 PSI.

Model No.	Thread Size
<b>V11B</b>	1/16" MPT
<b>V18B</b>	1/8" MPT

## ADAPTER FOR USE WITH A BLEEDER VALVE (V11B)



**TGF4000** 1/4" FPT x 1/4" Hose barb Chrome coated brass adaptor. Designed for use with a 1/16" NPT push button bleeder valve (V11B). Mainly used on tire inflators.

## ADAPTER FOR USE WITH A BLEEDER VALVE (V11B)



**TGF4004** 1/4" FPT x 1/4" MPT Chrome coated brass adaptor. Designed for use with a 1/16" NPT push button bleeder valve (V11B). Mainly used on tire inflators.

## PNEUMATIC CHECK VALVE

Prevent high air pressure from traveling back from the RECEIVER to the Pump. This One-Way Check Valve is ideal to block back-flow of air. Two female threads (NPT style) for most static and in-line applications.



**VC-440** 1/4" FPT x 1/4" FPT  
**VC-660** 3/8" FPT x 3/8" FPT

## HAND OPERATED SLIDE-VALVE

Ideal for pneumatic flow control in various applications. Installed "In-Line" as an ON/OFF mechanism for compressed air lines in industrial automation, construction needs and equipment actuators.



**VS-440** 1/4" FPT x 1/4" MPT  
**VS-660** 3/8" FPT x 3/8" MPT

Temperature Range: 20°F - 150°F




## PNEUMATIC FOOT PEDAL VALVES

## Model # VFP440

2 Position, 3 Port  
1/4" Foot Pedal Valve



## DIMENSIONAL DIAGRAM

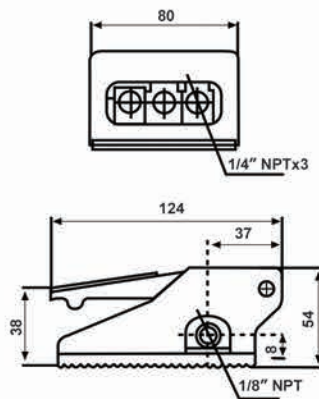

## VALVE SYMBOL




## Model # VFP440C

2 Position, 3 Port  
1/4" Foot Pedal Valve  
with Protective Shield



## DIMENSIONAL DIAGRAM

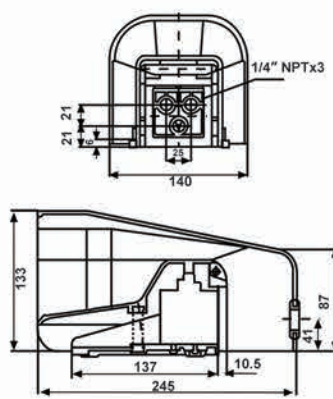

## VALVE SYMBOL




## Model # VFP440CL

2 Position, 3 Port  
1/4" Foot Pedal Valve with  
Protective Shield & **Lock**



## DIMENSIONAL DIAGRAM

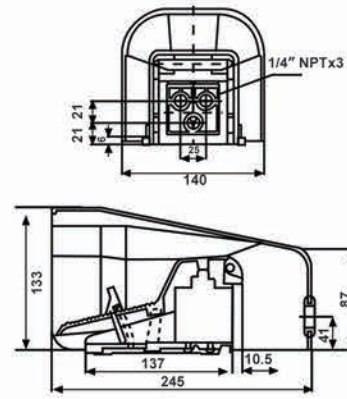

## VALVE SYMBOL



## TECHNICAL PARAMETERS:

Fluid Used	Clean Air
Operating Method	Direct Action Type
Pressure Range PSI	0 ~ 150
Allowable Temperature Range °F	20 ~ 140
Max Pressure Rating PSI	225
Lubrication	Not Required
Service Life	≥ 1 Million Cycles



## ALL PURPOSE DRY PRESSURE GAUGES

**Interstate Pneumatics Dry Pressure Gauges** are suitable for a wide range of applications for air, water, oil or other fluids which are compatible with brass and bronze. Painted, pressed steel case and shatterproof polycarbonate clear plastic provides durability and safety. **Interstate Pneumatics Rear Mount Gauge** inlet threads are positioned in the back (rear) center area.



TG2012



TG2022

Model	Range	Dial Dia.	Case/Bezel	Port Size/Port Direction
<b>G2001-030</b>	0 - 30 PSI	1-1/2"	Black	1/8" NPT Bottom Mount
<b>G2001-160</b>	0 - 160 PSI	1-1/2"	Black	1/8" NPT Bottom Mount
<b>G2001-200</b>	0 - 200 PSI	1-1/2"	Black	1/8" NPT Bottom Mount
<b>G2012-015</b>	0 - 15 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-030</b>	0 - 30 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-060</b>	0 - 60 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-100</b>	0 - 100PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-160</b>	0 - 160 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-200</b>	0 - 200 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-300</b>	0 - 300 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2012-300C</b>	0 - 300 PSI	2"	Chrome	1/4" NPT Bottom Mount
<b>G2012-400</b>	0 - 400 PSI	2"	Black	1/4" NPT Bottom Mount
<b>G2022-060</b>	0 - 60 PSI	2-1/2"	Black	1/4" NPT Bottom Mount
<b>G2022-160</b>	0 - 160 PSI	2-1/2"	Black	1/4" NPT Bottom Mount
<b>G2022-300</b>	0 - 300 PSI	2-1/2"	Black	1/4" NPT Bottom Mount
<b>G2024-030V</b>	0 - 30 PSI	2-1/2"	Black	1/4" NPT HG Vacuum
<b>G2032-160</b>	0 - 160 PSI	3"	Black	1/4" NPT Bottom Mount
<b>G2100-160</b>	0 - 160 PSI	1-1/4"	Black	1/8" NPT Rear Mount
<b>G2101-030</b>	0 - 30 PSI	1-1/2"	Black	1/8" NPT Rear Mount
<b>G2101-060</b>	0 - 60 PSI	1-1/2"	Black	1/8" NPT Rear Mount
<b>G2101-160</b>	0 - 160 PSI	1-1/2"	Black	1/8" NPT Rear Mount
<b>G2101-200</b>	0 - 200 PSI	1-1/2"	Black	1/8" NPT Rear Mount
<b>G2101-4000</b>	0 - 4000 PSI	1-1/2"	Chrome	1/8" NPT Rear Mount
<b>G2111-160</b>	0 - 160 PSI	2"	Black	1/8" NPT Rear Mount
<b>G2112-160</b>	0 - 160 PSI	2"	Black	1/4" NPT Rear Mount
<b>G2112-200</b>	0 - 200 PSI	2"	Black	1/4" NPT Rear Mount
<b>G2112-300</b>	0 - 300 PSI	2"	Black	1/4" NPT Rear Mount
<b>G2122-160</b>	0 - 160 PSI	2-1/2"	Black	1/4" NPT Rear Mount
<b>TG2012-D</b>	0 - 200 PSI	2-1/2" - Digital Dial	Black	1/8" NPT Bottom Mount
<b>TG2022-D</b>	0 - 200 PSI	2-1/2" - Digital Dial	Black	1/8" NPT Bottom Mount



GX20 2" Pressure Gauge Rubber Protector



## OIL FILLED PRESSURE GAUGES

Interstate Pneumatics Oil filled gauges are filled with silicon based oil (Dimethyle Silicon). These gauges last longer because they have fewer moving parts. The oil filled gauge helps dampening pointer vibration and eliminates corrosion resulting from condensed water when installed in areas that have humid air. The oil thus minimizes wear and tear on the more delicate parts of the device.



Model	Range	Dial Dia.	Case/Bezel	Port Size/Port Direction
<b>G7012-100</b>	0 - 100 PSI	2"	Chrome	1/4" NPT Bottom Mount
<b>G7012-200</b>	0 - 200 PSI	2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-160</b>	0 - 160 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-300</b>	0 - 300 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-500</b>	0 - 500 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-1000</b>	0 - 1000 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-1500</b>	0 - 1500 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-2000</b>	0 - 2000 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-2500</b>	0 - 2500 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-3000</b>	0 - 3000 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-3500</b>	0 - 3500 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7022-5000</b>	0 - 5000 PSI	2-1/2"	Chrome	1/4" NPT Bottom Mount
<b>G7122-100</b>	0 - 100 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-160</b>	0 - 160 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-200</b>	0 - 200 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-300</b>	0 - 300 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-500</b>	0 - 500 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-1000</b>	0 - 1000 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-1500</b>	0 - 1500 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-2000</b>	0 - 2000 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-2500</b>	0 - 2500 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-3000</b>	0 - 3000 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-3500</b>	0 - 3500 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount
<b>G7122-5000</b>	0 - 5000 PSI	2-1/2"	Chrome	1/4" NPT Rear Mount

## WATER PRESSURE GAUGES

**G2012-200W**

Pressure Range: 0 - 200 PSI  
Dial Diameter: 2"  
Fitting: 3/4" Female Hose Fitting

**G2022-300W (4400365)**

Pressure Range: 0 - 300 PSI  
Dial Diameter: 2-1/2"  
Fitting: 3/4" Female GHT Fitting

## GAS TEST PRESSURE GAUGES

**G2012-015GT (4402335)**

Pressure Range : 0 - 15 PSI  
Dial Dia.: 2"  
Thread Size: 3/4" NPT  
PSI increment: 1/10

**G2012-030GT (4402336)**

Pressure Range : 0 - 30 PSI  
Dial Dia.: 2"  
Thread Size: 3/4" NPT  
PSI increment: 1/2

CO<sub>2</sub> PRESSURE GAUGE**G2042-2000C**

Range: 0 - 2000PSI  
Dial Dia.: 2"  
Case/Bezel: Black  
Port Size: 1/4" NPT  
Port Direction: Right Side Mount



## TIRE CHUCKS

The **Air Line Chucks** in this catalog are designed based on existing standards and are compatible with the industry standards for pneumatic applications. Max pressure rating for these chucks is 175 PSI.

**WARNING:** Chucks for "Live Air Line Only" have a built-in shut-off valve and will not work on inflator gauges. Chucks for "Inflator Gauges Only" do not have a shut-off valve and will not work on live air lines.

## STRAIGHT LOCKING FOOT CHUCK WITH CLIP



**T02** 1/4" FPT Straight Locking Foot Chuck with Clip and Shut-off Valve

**T32** 1/4" FPT Straight Locking Foot Chuck with Clip and without Internal Shut-off Valve

## ANGLE-IN TAPERED CHUCK



**T05** 1/4" FPT Angled-In Tapered Chuck with Shut-off Valve

**T35** 1/4" FPT Angled-in Tapered Chuck without Internal Shut-off Valve

## ANGLED BALL FOOT CHUCK WITH CLIP



**T03** 1/4" FPT Angle Ball Foot Brass Chuck with Clip & Shut-off Valve

## HOSE BARB ANGLE BALL FOOT CHUCK



**T07** 1/4" Hose Barb Brass Angle Ball Foot Chuck with Shut-off Valve

## ANGLED BALL FOOT CHUCK



**T04** 1/4" FPT Angle Ball Foot Brass Chuck with Shut-off Valve

## SLEEVE LOCK STRAIGHT-IN BRASS CHUCK



**T19** 1/4" FPT Sleeve Lock Straight-In Brass Chuck with Shut-off Valve

## STRAIGHT-IN TAPERED CHUCK



**T06** 1/4" FPT Straight-In Tapered Chuck with Shut-off Valve

**T36** 1/4" FPT Straight-in Tapered Chuck without Internal Shut-off Valve

## SLEEVE LOCK STRAIGHT-IN BRASS CHUCK



**T20** 1/4" Hose Barb Sleeve Lock Straight-In Brass Chuck without Internal Shut-off Valve

## HEAVY-DUTY THUMB LOCK-ON TIRE CHUCK



**T42** 1/4" FPT FNPT Heavy-Duty Professional Thumb Lock-On Tire Air Chuck

## STRAIGHT-IN TAPERED CHUCK



**T46** 1/4" Hose Barb Straight-in Tapered Brass Chuck w/o Internal Shut-off Valve

## AUTO-STOP TIRE DEFLATOR VALVE KIT



**TVD4**  
4PCS Adjustable Screw-On  
Auto-Stop Tire Deflator Valve Kit



## STRAIGHT-IN DUAL FOOT TILT-LOCK TRUCK CHUCK



1/4" NPTF inlet threads, internal shut-off valve. Designed to fit both valves on dual wheels. Pressure rating 180 PSI max.

Model #	Length
<b>T08</b>	6"
<b>T08L</b>	11"

## DUAL FOOT TRUCK CHUCK



1/4" NPTF inlet threads. No internal shut-off valve for use on tire inflator only. Designed to fit both valves on dual wheels. Pressure rating 180 PSI max.

Model #	Length
<b>T37</b>	6"
<b>T37L</b>	11"

**Interstate Pneumatics** Tire Pressure Gauges feature chrome plated metal construction and are designed for long, reliable service life. Four sided **Black Anodized** Aluminum slide out scale features white printing for easy reading from any angle.



## T10 TIRE CHUCK



10" Long

## TG192 HEAVY DUTY TRUCK GAUGE



Range 10 - 150 PSI. 12-3/4" Long

Heavy duty truck gauge with angle head. Designed for fleet use. Angled dual foot allows easy servicing of both valves on dual wheels.

## TG193 STRAIGHT-OUT DUAL FOOT SERVICE TIRE GAUGE



Range 10 - 150 PSI. 13-1/2" Long

Straight-on dual foot service. Designed for difficult-to-reach inner dual. Straight-On chuck for inside wheels.

## TG195 POCKET GAUGE WITH ANGLE HEAD



Range 10 - 50 PSI. 5-3/4" Long

Pocket gauge with angle head for passenger cars and light trucks.

## TG198 POCKET GAUGE WITH DUAL FOOT HEAD



Range 20 - 120 PSI. 5-3/4" Long

Pocket gauge with dual foot head. Angled dual foot allows easy servicing of both valves on dual wheels.



## AIR VENDING MACHINE ACCESSORIES

## 1/4" BLACK STEEL BRAIDED RUBBER HOSE W/ REEL



Model #

**HA84-450**

Size

1/4" 450ft.

Temperature range -40°F to 180°F

Working pressure 600 PSI @ 70°F

Safety factor 4:1

## SPECIALTY STEEL PLUG



Model #

**FM44RL**

Description

1/4" MPT  
Specialty Steel Plug

## RUBBER VENDING HOSE BUMPER



Model #

**RB40**

Description

Rubber Vending  
Hose Bumper for  
1/4" Rubber Hose



Interstate Pneumatics Tire Inflators are available in four body styles; medium duty, for passenger cars and light trucks, heavy duty, for large trucks and heavy duty dial gauge tire inflators (for easier reading) for all vehicles. **Comes standard with a 1/4" Red Rhino Rubber Hose. Upgrade to a steel braided flexible oil & Ozone resistant black rubber hose.**

Straight-In Tapered Chuck Fits recessed valve holes.		Angle-In Tapered Chuck Designed for easy use with most sport (alloy) wheels.
<b>TF3000 Series Medium Duty Inflator</b> - for passenger cars & light trucks. Indicates 10-90 PSI in 2 PSI increments.	<b>TF3146 Chuck with TF3000 Inflator</b> Straight-in	<b>TF3135 Chuck with TF3000 Inflator</b> Angle-in Tapered
		
<b>TF5000 Series Heavy Duty Inflator</b> - for large trucks. Indicates 10-120 PSI in 2 PSI increments.	<b>TF5146 Chuck with TF5000 Inflator</b> Straight-in Tapered	<b>TF5135 Chuck with TF5000 Inflator</b> Angle-in Tapered
		
<b>TF7000 Series Heavy Duty Dial Inflator</b> - for use on all vehicles. Indicates 5-160 PSI in 5 PSI increments.	<b>TF7146 Chuck with TF7000 Inflator</b> Straight-in Tapered	<b>TF7135 Chuck with TF7000 Inflator</b> Angle-in Tapered
		
<b>TF9000 Series Heavy Duty Inflator</b> - for large trucks. Indicates 10-120 PSI in 2 PSI increments.	<b>TF9146 Chuck with TF9000 Inflator</b> Straight-in Tapered	<b>TF9135 Chuck with TF9000 Inflator</b> Angle-in Tapered
 Bubble Window		
<b>Whip-Ends</b> Replacement tire inflator hose assemblies with ultra flexible oil and ozone resistant rubber hose, brass fittings, and chucks. Inflator end fitting is 3/8" - 24 UNF Male thread (No. FMS64T).  <b>Upgrade to a steel braided hose whip.</b>  <b>Use a "W" suffix to upgrade to a steel braided whip.</b>	<b>TW146 Chuck</b> Straight-in Tapered (T46) with 12" Whipend	<b>TW135 Chuck</b> Angle in Taper (T05) with 12" Whipend
		
	TW100 w/o Chuck (T46)	TW100 w/o Chuck (T05)



**Interstate Pneumatics** Tire Inflators features chrome plated metal castings, precision machined brass internal parts, and Buna-N (Nitrile) O-rings. All models have 1/4" NPTF inlet threads with standard tolerance of  $\pm 3\%$ .

**Dual Foot 6" & 11" Extension  
Truck Chuck**  
Fits both valves on dual wheels.

**Straight-In Tapered Chuck**  
Fits recessed valve holes.

**TF3137 6" Ext - TF3137L 11" Ext**  
Chuck with TF3000 Inflator  
for Trucks Dual Foot



**TF5137 6" Ext - TF5137L 11" Ext**  
Chuck with TF5000 Inflator  
for Trucks Dual Foot



**TF5108B 6" Ext - TF5108BL 11" Ext**  
Inflator Heavy Duty for Trucks  
Straight-in Dual Foot



**TF7137 6" Ext - TF7137L 11" Ext**  
Chuck with TF7000 Inflator  
for Trucks Dual Foot



**TF7108 6" Ext - TF7108L 11" Ext**  
Chuck with TF7000 Inflator  
for Trucks Straight-in Dual Foot



**TW100 Rubber Hose Whip**  
w/o Chuck 12" Long  
**TW100W Black Steel Braided Hose**  
Whip w/o Chuck 12" long



**TF9137 6" Ext - TF9137L 11" Ext**  
Chuck with TF9000 Inflator  
for Trucks Dual Foot



**TF9108 6" Ext - TF9108L 11" Ext**  
Inflator Heavy Duty for Trucks  
Straight-in Dual Foot




**TW137 12" Whipend w/T37 6"**  
long Chuck  
**TW137L 12" Whipend w/T37 11"**  
long Chuck



**TW108 12" Whipend w/T08**  
6" long Chuck  
**TW108L 12" Whipend w/T08L**  
11" long Chuck



**TW108BL** same as TW108 w/bleed valve

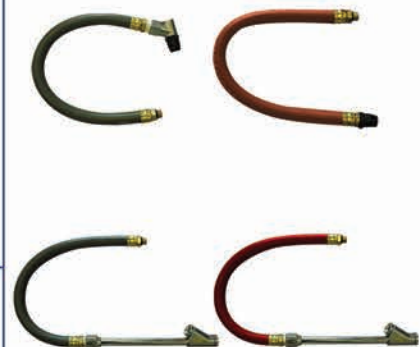

Use a "W" suffix to upgrade to  
a steel braided whip.



## DIGITAL TIRE INFLATOR

**TF6000**

- Measuring Range: 0-200 PSI, 0-1379 kPa, & 0-14 Bar
- Operating Range: 0-230 PSI
- Flow Rate: 17.3 CFM @145 PSI
- Battery: CR2032 (Included)
- Trigger: Plated Steel
- Air Inlet: 1/4" NPT Female

## DIGITAL TIRE INFLATOR WITH TIRE CHUCK

**TF6142**

- Measuring Range: 0-200 PSI, 0-1379 kPa, & 0-14 Bar
- Operating Range: 0-230 PSI
- Flow Rate: 17.3 CFM @145 PSI
- Battery: CR2032 (Included)
- Trigger: Plated Steel
- Air Inlet: 1/4" NPT Female

## DIGITAL TIRE INFLATOR

**TF8000**

- Measuring Range: 0-200 PSI, 0-1379 kPa, & 0-14 Bar
- Operating Range: 0-230 PSI
- Flow Rate: 17.3 CFM @145 PSI
- Battery: CR2032 (Included)
- Trigger: Plated Steel
- Air Inlet: 1/4" NPT Female

## TIRE INFLATOR WITH STRAIGHT-IN DUAL FOOT TRUCK CHUCK

**TF8137**

- Measuring Range: 0-200 PSI
- Operating Range: 0-230 PSI
- Flow Rate: 3 CFM @145 PSI
- Battery: CR2032 (Included)
- Air Inlet: 1/4" NPT Female
- Hose Length: 6"
- Chuck: Dual Foot Truck Chuck (T37)

## INFLATOR CHUCK WITH DIGITAL TIRE INFLATOR

**TF8146**

- Measuring Range: 0-200 PSI
- Operating Range: 0-230 PSI
- Flow Rate: 3 CFM @145 PSI
- Battery: CR2032 (Included)
- Air Inlet: 1/4" NPT Female
- Hose Length: 6"
- Chuck: Straight-In Tapered (T46)

## DUAL TIRE INFLATOR AIR CHUCK

**TW142**

Hybrid Hose Dual Tire Inflator Extension with Locking Tire Air Chuck





**Interstate Pneumatics** Tire Inflators features chrome plated metal castings, precision machined brass internal parts, and Buna-N (Nitrile) O-rings. All models have 1/4" NPTF inlet threads with standard tolerance of  $\pm 3\%$ .

### TIRE CHUCKS WITH DIAL PRESSURE GAUGES

**Interstate Pneumatics** Dial Pressure Gauges feature a 2" dial gauge with large easy to read markings in black (PSI) and solid brass fittings, 12" oil resistant hose, a bleeder valve for relieving pressure, and a rubber boot to protect the gauge from shock damage. These gauges provide extreme accuracy and long life in the most rugged applications.



TG236

TG336



**Comes with a Brass Straight Chuck only**

Model No.	Dial Size	Type	Working Pressure Range
<b>TG236</b>	2"	Straight Chuck	0 - 60 PSI
<b>TG336</b>	2"	Straight Chuck	0 - 160 PSI

Tapered Angle Chuck



**Comes with a 12" Long Rhino Rubber Oil Resistant Hose with a Button Style Bleeder Valve**

Model No.	Dial Size	Type	Working Pressure Range
<b>TG2135</b>	2"	Tapered Angle Chuck	0 - 15 PSI
<b>TG2235</b>	2"	Tapered Angle Chuck	0 - 60 PSI
<b>TG2335</b>	2"	Tapered Angle Chuck	0 - 160 PSI
<b>TG2435</b>	2"	Tapered Angle Chuck	0 - 400 PSI



**Comes with a 12" Long Rhino Rubber Oil Resistant Hose with a Button Style Bleeder Valve**

Model No.	Dial Size	Type	Working Pressure
<b>TG2308</b>	2"	Dual Foot Chuck and 30° Reverse angle for outside wheel	0 - 160 PSI



## TIRE VALVE CORE REMOVAL TOOLS

	Model #	Description
	<b>TCT4</b>	4" Tire Valve Core Removal Tool
	<b>TCT6</b>	6" Tire Valve Core Removal Tool
	<b>TCT4A</b>	4" professional Locking Tire core removal tool. Steel tip has two spring loaded micro ball bearings to lock the tire valve core from shooting away during removal. Aluminum handle with magnetic end to safely pick and hold the valve core. Comes with steel pocket clip

## 2" DIA TIRE TREAD DEPTH GAUGE



Comes in velvet fabric pouch & clam shell

**TG32**

Durable solid zinc cast body  
Measures in 1/32 inch increments  
Dial type tire tread depth gauge  
Easy to read acrylic lens  
Zone 1 (Red) shows tire tread low and tire needed to be replaced  
Zone 2 (Yellow) shows marginal tread remaining  
Zone 3 (Green) shows tire has ample tread

## 4 WAY TIRE VALVE STEM CORE REMOVER / INSTALLER / REPAIR RETHREADER TOOL

**TCT1**

Exterior Valve Rethreader Interior Valve Rethreader Tire Valve Core Remover / Installer

## 4-WAY STANDARD VALVE REMOVAL TOOL WITH 4 STANDARD VALVE CORES

**TCT2**

4-in1 tire valve standard stem removal tool removes valve core, retap threads & ream the inside of the valve  
Includes four standard brass valve stem cores for ATV, Cars, Motorcycles, Bicycles, Trucks & Air Conditioning Units

## TIRE VALVE STEM CORE 4-PACK



(SCHRADER)

**T11**

Tire Valve Stem Core 4 Pack

## TIRE VALVE STEM CAP - 4 PACK

**T12**

Tire Valve Cap 4 Pack



## HRCBK 16 PIECE RECOIL HOSE / BLOWGUN / FITTINGS KIT



Model #	Description
<b>CG440B</b>	1/4" x 1/4" FPT Universal Brass Coupler
<b>CPH440</b>	1/4" x 1/4" FPT Industrial Coupler Plug
<b>CPH441</b>	1/4" x 1/4" MPT Industrial Coupler Plug
<b>FPC440</b>	1/4" FPT x 1/4" FPT Brass Female Coupling
<b>FA414</b>	1/4" NPT Brass Hex Male Nipple
<b>T04</b>	1/4" FPT Angle Ball Foot Chuck
<b>TG195</b>	Tire Pressure Gauge - 10-50 PSI Pencil Type
<b>B300</b>	1/4" FPT Standard Thumb Lever Blowgun
<b>BT1</b>	1/8" MPT Brass Tip
<b>BTN1</b>	0.0425" x 7/8" Long Needle Tip
<b>BT2</b>	1/8" MPT Rubber Tip
<b>BT6S</b>	1/8" MPT Standard Brass Safety Tip
<b>TT33</b>	1/2" x 33ft PTFE Thread Tape
<b>HR14-012</b>	1/4" 12 ft Long w/1/4" NPT Swivel Fittings, Recoil Yellow Nylon Hose

## TGBCK 17 PIECE TIRE GAUGE / BLOWGUN / FITTINGS KIT



Model #	Description
<b>CG440B</b>	1/4" x 1/4" FPT Universal Brass Coupler
<b>CPH441</b>	1/4" x 1/4" MPT Industrial Coupler Plug
<b>CPH440</b>	1/4" x 1/4" FPT Industrial Coupler Plug
<b>FPC440</b>	1/4" FPT x 1/4" FPT Brass Female Coupling
<b>FA414</b>	1/4" NPT Brass Hex Male Nipple
<b>TT33</b>	1/2" x 33ft PTFE Thread Tape
<b>B300</b>	1/4" FTP Standard Thump Lever - w/o Tip Blowgun
<b>BT2</b>	1/8" MPT Rubber Tip
<b>BT6S</b>	1/8" MPT Standard Brass Safety Tip
<b>T37</b>	1/4" FPT Dual Foot 6" Truck Chuck
<b>BTN1</b>	0.0425" x 7/8" long Needle Tip
<b>BT1</b>	1/8" MPT Brass Tip
<b>TG195</b>	Tire Pressure Gauge - 10 - 50 PSI - Pencil Type - Standard Pocket Gauge

## C16K 16 PIECE AIR ACCESSORY KIT



- (1) 25' Recoil Hose  
160 PSI Max
- (1) Rubber Tip
- (1) Tapered Tip
- (2) Sports Needle
- (1) OSHA Safety Tip
- (1) Blowgun 160 PSI Max
- (1) Tire Gauge 0 - 100 PSI
- (1) Tire Chuck 160 PSI Max
- (1) Female Connector
- (1) Male Connector
- (1) Female Coupler
- (2) Female Air Plug
- (2) Male Air Plug



## C17K 17 PIECE AIR ACCESSORY KIT



- (1) Tapered Tip
- (2) Sports Needle
- (1) OSHA Safety Tip
- (1) Blowgun 160 PSI Max
- (1) Tire Gauge 10 - 50 PSI
- (1) Tire Chuck 160 PSI Max
- (1) Female Connector
- (2) Male Connector
- (1) Female Coupler
- (2) Female Air Plug
- (4) Male Air Plug

**TCRK 1/4" STRAIGHT-IN TAPERED TIRE  
CHUCK REPAIR KIT (GASKET, BRASS TIP)**





## INTRODUCTION TO FILTERS, REGULATORS, AND LUBRICATORS

For a pneumatic system to work efficiently, the air must be: (1) Clean, to safeguard (2) Equipment from contaminant damage (3) Flowing at the right pressure for the particular use; and (4) Combined with a lubricant in most, but not all, cases to reduce friction and wear of internal moving parts. A rule of thumb states that every 2-psig increase in operating pressure adds an additional 1% compression energy cost. Use FRL ensures that every tool is receives a clean, lubricated supply of compressed air.

The process of assuring that air meets these criteria is called conditioning, which is broken into three elements: Filtration, Air Pressure Regulation, and Lubrication. (1) FILTERS remove moisture and particles that may be harmful to pneumatic equipment (2) REGULATORS ensure that the compressed air stays within a specified pressure range, and (3) LUBRICATORS supply lubricant into the compressed air stream to lubricate the internal moving parts of pneumatic equipment. Conditioning components may be purchased separately or as preassembled Filter, Regulator, Lubricator (FRL) Combinations; or a Filter/Regulator in a single integral housing to conserve space.

## CARE AND MAINTENANCE OF FRL COMPONENTS


**FILTERS:** Draining the collected liquids and contaminants from the bowl is the most important filter maintenance operation. Over time, debris will clog the filter element, causing reduced flow and pressure drop. Down stream equipment will be affected by the reduction in flow and pressure as the filter continues to clog. Maintenance on the filter element should be scheduled before this happens. Either clean or replace the filter element to ensure proper operation.

**REGULATORS:** When properly protected by a filter, the regulator requires no routine maintenance. It is suggested that a gauge be used to indicate the downstream pressure setting.

**LUBRICATORS:** Oil reservoirs must be kept filled, and should be inspected regularly for contaminants in the bowl.


**NOTE:** When using filters and lubricators with plastic bowls; regular inspection for signs of deterioration caused by incompatibility with certain chemicals should be performed. Examples of incompatible chemicals are, Synthetic Oils, Phosphate Esters, and Chlorinated Hydrocarbons. For applications where a chemical is suspected to be incompatible, use metal bowls on the filter, and lubricator.

### FILTER

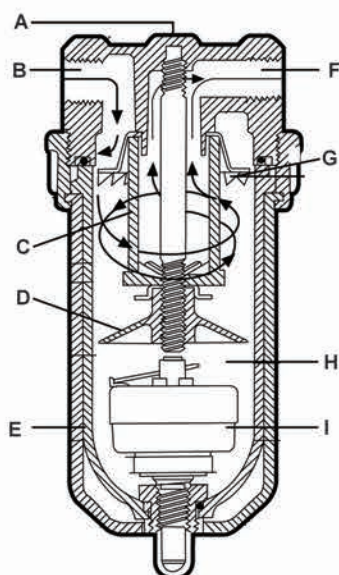


- A) Filter Body
- B) Compressed Air Inlet
- C) Filter Element
- D) Baffle
- E) Polycarbonate Bowl
- F) Filtered Air Outlet
- G) Swirl Plate
- H) Filter Reservoir
- I) Auto Drain

### REGULATOR

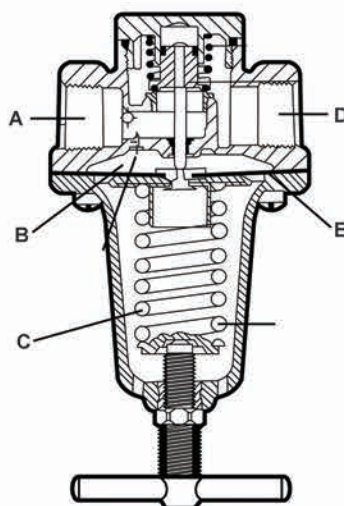

- A) Air Inlet
- B) Pressure Relieving Port
- C) Spring
- D) Regulated Air Outlet
- E) Diaphragm

### LUBRICATOR

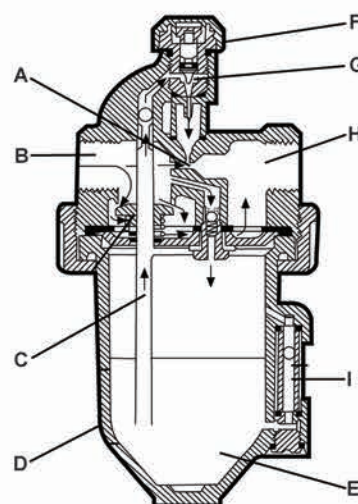

- A) Oil Misting Port
- B) Air Inlet
- C) Oil Siphon Tube
- D) Metal Bowl
- E) Oil Reservoir
- F) Oil Drip Control Knob
- G) Drip Sight Tube
- H) Lubricated Air Outlet
- I) Sight Glass



## FILTERS

## MINI IN-LINE FILTERS



**WR1010**  
1/4" NPT  
IN-LINE FILTER



**WR1020**  
1/4" POLY BOWL  
IN-LINE FILTER

Part #	WR1010	WR1020
Port Size	1/4" NPT	1/4" NPT
Filter Element Size	40 Micron	25 Micron
Max Operating System	200 PSI	150 PSI
Bowl Material	Aluminum	Polycarbonate
Bowl Capacity	-	0.5 Oz.
Flow @ 100 PSI	30 SCFM	20 SCFM
Drain	-	Push Pin Metal



**WR1010-QC**  
1/4" Industrial Quick Connect Filter Whip

## COMPACT FILTER

Part #	W1030
Port Size	1/4" NPT
Filter Element Size	20 Micron
Max Operating System	150 PSI
Bowl Material	Polycarbonate
Bowl Capacity	1 Oz.
Flow @ 100 PSI	22 SCFM
Drain	Brass Drain Cock



**POLY  
BOWL**

## 1/4" DESICCANT FILTER

Part #	WR1420
Inlet / Outlet	1/4" NPT
Working Pressure	125 PSI
Flow @ 100 PSI	15 SCFM
Working Temperature	32 - 130°F



**POLY  
BOWL**



STANDARD FILTERS

- Specifications:**
- Filter Element Size: 40 Micron
  - Max Operating Pressure: 250 PSI
  - Bowl Material: Metal
  - Drain: Brass Drain Cock Valve
  - Max Temperature: 170°F



Part #	W1040AP	W1060AP	W1080AP	W1085AP	W1090AP
Port Size	1/4" NPT	3/8" NPT	1/2" NPT	3/4" NPT	1" NPT
Bowl Capacity	5 Oz.	8 Oz.	8 Oz.	8 Oz.	8 Oz.
Flow @ 100 PSI	53 SCFM	77 SCFM	106 SCFM	250 SCFM	350 SCFM
Width	2-1/4"	2-3/4"	2-3/4"	3-1/2"	3-1/2"
OAL	6-1/4"	7-1/2"	7-1/2"	10-3/4"	10-3/4"



## AIR REGULATORS

**W1130****W1130B**

Part #	W1130	W1130B
Port Size	1/4" NPT	1/4" NPT
Gauge Port	1/8" NPT	1/8" NPT
Bowl Material	Aluminum Body	Brass Body
Control Style	Plastic Knob	Plastic Knob
Max Inlet Pressure	250 PSI	250 PSI
Outlet Pressure	0-125 PSI	0-125 PSI
Flow @ 100 PSI	16 SCFM	16 SCFM
Gauge (Included)	0-160 PSI, 1.5" Dial	0-160 PSI, 1.5" Dial

**WR1120**

FLOW: LEFT TO RIGHT

**WR1120RL**

FLOW: RIGHT TO LEFT

Part #	WR1120	WR1120RL
Port Size	1/4" NPT	1/4" NPT
Gauge Port	1/8" NPT	1/8" NPT
Bowl Material	Aluminum Body	Aluminum Body
Control Style	Plastic Knob	Plastic Knob
Max Inlet Pressure	200 PSI	200 PSI
Outlet Pressure	0-125 PSI	0-125 PSI
Flow @ 100 PSI	6 SCFM	6 SCFM
Gauge	0-160 PSI, 1.5" Dial	0-160 PSI, 1.5" Dial



## KNOB REGULATORS


**W1140**

**W1160**

**W1180 / W1185 / W1190**

Part #	W1140	W1160	W1180	W1185	W1190
Port Size	1/4" NPT	3/8" NPT	1/2" NPT	3/4" NPT	1" NPT
Gauge Port	1/8" NPT	1/8" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Body Material	Aluminum Body	Aluminum Body	Aluminum Body		
Max Inlet Pressure	200 PSI	200 PSI	200 PSI		
Outlet Pressure	0-125 PSI	0-125 PSI	0-125 PSI		
Flow @ 100 PSI	20 SCFM	90 SCFM	120 SCFM		
Gauge (Included)	0-160 PSI, 1.5" Dial	0-160 PSI, 1.5" Dial	0-160 PSI, 2" Dial		

## T-HANDLE REGULATORS


**T-HANDLE  
AIR REGULATOR**

**HEAVY DUTY  
T-HANDLE  
AIR REGULATOR**

Part #	W1140T	W1160T	W1180T	W1180HD	W1180HD-250
Port Size	1/4" NPT	3/8" NPT	1/2" NPT	1/2" NPT	1/2" NPT
Gauge Port	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Max Inlet Pressure	250 PSI	250 PSI	250 PSI	250 PSI	250 PSI
Outlet Pressure	0-125 PSI	0-125 PSI	0-125 PSI	0-250 PSI	0-250 PSI
Flow @ 100 PSI	100 SCFM	110 SCFM	115 SCFM	200 SCFM	200 SCFM
Gauge (Included)	0-160 PSI, 2" Dial			0-160 PSI, 2" Dial	



## FIXED PRESSURE REGULATORS



**FIXED  
PRESET REGULATOR**



**WR1000A  
ADJUSTABLE  
PRESET REGULATOR**

Part #	WR1105	WR1110	WR1115	WR1000A
Port Size	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Inlet Pressure	50 PSI (Preset)	90 PSI (Preset)	120 PSI (Preset)	90-115 PSI
Maximum Pressure	225 PSI	225 PSI	225 PSI	225 PSI

## REGULATOR WHIPS

**WR1000A-QC**

1/4" Industrial Quick Connect  
72-115 Adjustable PSI Regulator Whip

**WR1105-QC**

1/4" Industrial Quick Connect 50 PSI Regulator Whip

**WR1110-QC**

1/4" Industrial Quick Connect 90 PSI Regulator Whip

**WR1115-QC**

1/4" Industrial Quick Connect 120 PSI Regulator Whip



## AIR LUBRICATORS

### MINI LUBRICATORS



**WR1220**  
MINI SERIES IN-LINE



**W1230**  
COMPACT POLY BOWL

Part #	WR1220	W1230
Port Size	1/4" NPT	1/4" NPT
Bowl Capacity	0.5 Oz.	1 Oz.
Bowl Material	Polycarbonate	Polycarbonate
Body Material	Brass	Metal
Max Operating System	150 PSI	150 PSI
Flow @ 100 PSI	-	12 SCFM




**WR1220-QC**  
1/4" Industrial Quick Connect Mini-Lubricator Whip

## STANDARD LUBRICATORS

### Specifications:

- Bowl Material: Metal
- Max. Operating Pressure: 250 PSI
- Oil Particle: >5μ

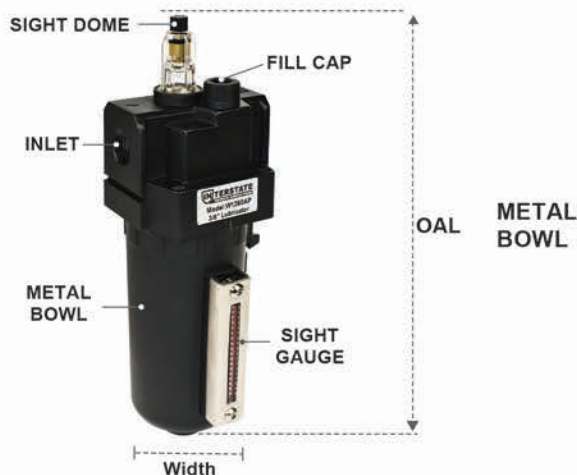

Part #	W1240AP	W1260	W1260AP	W1280AP
Port Size	1/4" NPT	3/8" NPT	3/8" NPT	1/2" NPT
Bowl Capacity	5 Oz.	5 Oz.	8 Oz.	8 Oz.
Flow @ 100 PSI	55 SCFM	55 SCFM	120 SCFM	120 SCFM
Operating Temperature	40°F to 150°F	40°F to 150°F	40°F to 150°F	40°F to 150°F
OAL	7-1/4"	7-1/4"	8-1/2"	8-1/2"
Width	2-1/4"	2-1/4"	3"	3"



## HEAVY DUTY LUBRICATORS



**W1285A**  
HEAVY DUTY  
METAL BOWL



**W1290A**  
HEAVY DUTY  
METAL BOWL

Part #	W1285A	W1290A
Port Size	3/4" NPT	1" NPT
Bowl Capacity	8 Oz.	8 Oz.
Bowl Material	Metal	Metal
Body Material	Metal	Metal
Max Operating System	250 PSI	250 PSI
Flow @ 100 PSI	290 SCFM	290 SCFM

## COMPACT FILTER / REGULATOR COMBO



**POLY  
BOWL**



**METAL  
BOWL**

Part #	WB1330	WBR1330
Port Size	1/4" NPT	1/4" NPT
Bowl Capacity	1 Oz.	2 Oz.
Bowl Material	Polycarbonate	Metal
Flow @ 100 PSI	20 SCFM	20 SCFM
Filter Element Size	20 Micron	40 Micron
Delivery Pressure	0-125 PSI	0-125 PSI
Handle Type	Plastic Knob	Plastic Knob
Max. Operating Pressure	150 PSI	250 PSI
Gauge Port	1/8" NPT	1/8" NPT
Gauge (Included)	0-160 PSI, 1.5" Dial	0-160 PSI, 1.5" Dial



## STANDARD FILTER / REGULATOR COMBO



METAL  
BOWL

Part #	WB1340	WB1360	WB1380
Port Size	1/4" NPT	3/8" NPT	1/2" NPT
Gauge Port	1/8" NPT	1/8" NPT	1/8" NPT
Filter Element Size	40 Micron	40 Micron	40 Micron
Bowl Capacity	5 Oz.	8 Oz.	8 Oz.
Flow @ 100 PSI	53 SCFM	77 SCFM	106 SCFM
Max. Operating Pressure	250 PSI	250 PSI	250 PSI
Delivery Pressure	0-125 PSI	0-125 PSI	0-125 PSI
Bowl Material	Metal	Metal	Metal
Regulator Handle Type	Plastic Knob	Plastic Knob	Plastic Knob
Gauge (Included)	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial

## MINI FILTER / REGULATOR / LUBRICATOR COMBO



POLY  
BOWL



Part #	WC1031G	WC1331G
Port Size	1/4" NPT	1/4" NPT
Gauge Port	1/8" NPT	1/8" NPT
Filter Element Size	20 Micron	20 Micron
Bowl Capacity	1 Oz.	1 Oz.
Flow @ 100 PSI	12 SCFM	12 SCFM
Max. Operating Pressure	150 PSI	150 PSI
Delivery Pressure	0-125 PSI	0-125 PSI
Bowl Material	Polycarbonate	Polycarbonate
Regulator Handle Type	Plastic Knob	Plastic Knob
Gauge (Included)	0-160 PSI, 1.5" Dial	0-160 PSI, 1.5" Dial



## STANDARD FILTER / REGULATOR / LUBRICATOR COMBO



METAL BOWL

Part #	WC1341AGP	WC1361AGP	WC1381AGP
Port Size	1/4" NPT	3/8" NPT	1/2" NPT
Gauge Port	1/4" NPT	1/4" NPT	1/4" NPT
Filter Element Size	40 Micron	40 Micron	40 Micron
Bowl Capacity	5 Oz.	8 Oz.	8 Oz.
Flow @ 100 PSI	53 SCFM	77 SCFM	77 SCFM
Max. Operating Pressure	250 PSI	250 PSI	250 PSI
Delivery Pressure	0-125 PSI	0-125 PSI	0-125 PSI
Bowl Material	Metal	Metal	Metal
Regulator Handle Type	Plastic Knob	Plastic Knob	Plastic Knob
Gauge (Included)	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial

## STANDARD FILTER / REGULATOR / LUBRICATOR COMBO



METAL BOWL

Part #	WC1041GP	WC1061GP	WC1081GP	WC1081HDAG-250
Port Size	1/4" NPT	3/8" NPT	1/2" NPT	1/2" NPT
Gauge Port	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Filter Element Size	40 Micron	40 Micron	40 Micron	40 Micron
Bowl Capacity	5 Oz.	8 Oz.	8 Oz.	8 Oz.
Flow @ 100 PSI	53 SCFM	77 SCFM	106 SCFM	106 SCFM
Max. Operating Pressure	250 PSI	250 PSI	250 PSI	250 PSI
Delivery Pressure	0-125 PSI	0-125 PSI	0-125 PSI	0-125 PSI
Bowl Material	Metal	Metal	Metal	Metal
Regulator Handle Type	T-Handle	T-Handle	T-Handle	T-Handle
Gauge (Included)	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial



## STANDARD FILTER / REGULATOR / LUBRICATOR COMBO



METAL BOWL

Part #	WCR1041G	WCR1061G
Port Size	1/4" NPT	3/8" NPT
Gauge Port	1/8" NPT	1/8" NPT
Dimensions (W x T x D)	5-1/2" x 5-1/2" x 3-3/8"	7" x 7" x 4"
Filter Element Size	25 Micron	25 Micron
Bowl Capacity	5 Oz.	8 Oz.
Flow @ 100 PSI	18 SCFM	70 SCFM
Max. Operating Pressure	250 PSI	250 PSI
Delivery Pressure	0-125 PSI	0-125 PSI
Bowl Material	Metal	Metal
Regulator Handle Type	Plastic Knob	Plastic Knob
Gauge (Included)	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial

## HEAVY-DUTY FILTER / REGULATOR / LUBRICATOR COMBO



METAL BOWL

Part #	WC1086AG	WC1091AG
Port Size	3/4" NPT	1" NPT
Gauge Port	1/4" NPT	1/4" NPT
Filter Element Size	40 Micron	40 Micron
Bowl Capacity	16 Oz.	16 Oz.
Flow @ 100 PSI	250 SCFM	320 SCFM
Max. Operating Pressure	250 PSI	250 PSI
Delivery Pressure	0-125 PSI	0-125 PSI
Bowl Material	Metal	Metal
Regulator Handle Type	Plastic Knob	Plastic Knob
Gauge (Included)	0-160 PSI, 2" Dial	0-160 PSI, 2" Dial





- ALBL**      Bracket For 1/4" Filter / Regulator / Lubricator Series
- ALBS**      Bracket For 3/8" Filter / Regulator / Lubricator Series
- ALB-85**     Bracket For 3/4" Filter / Regulator / Lubricator Series
- ALB-90**     Bracket For 1" Filter / Regulator / Lubricator Series



- W1040BM**     Metal Bowl for W1040AP / WB1340
- W1060BM**     Metal Bowl for W1060AP / W1080AP / W1085AP / W1090AP



- W1040DB**     Brass Drain for W1040AP / W1060AP / W1080AP / W1085AP / W1090AP



- W1040MB**     Mounting Bracket for W1040AP / W1240AP
- W1060MB**     Mounting Bracket for W1060AP / W1080AP / W1260AP / W1280AP
- W1085MB**     Mounting Bracket for W1085AP / W1090AP / W1285AP / W1290AP



- W1040SG**     Sight Glass for W1040AP / W1060AP / W1080AP / W1085AP / W1090AP / W1240AP / W1260AP / W1280AP / W1285AP / W1290AP / WB1340 / WB1360 / WB1380





<b>W1040F40C</b>	Standard Filter Element Copper 40 Micron for W1040AP
<b>W1040F5C</b>	Standard Filter Element Copper 5 Micron for W1040AP
<b>W1060F40C</b>	Standard Filter Element Copper 40 Micron for W1060AP & W1080AP
<b>W1060F5C</b>	Standard Filter Element Copper 5 Micron for W1060AP & W1080AP
<b>W1085F40C</b>	Standard Filter Element Copper 40 Micron for W1085AP & W1090
<b>W1085F5C</b>	Standard Filter Element Copper 5 Micron for W1085AP & W1090



<b>W1040F40P</b>	Standard Filter Element Plastic 40 Micron for W1040AP
<b>W1040F5P</b>	Standard Filter Element Plastic 5 Micron for W1040AP
<b>W1060F40P</b>	Standard Filter Element Plastic 40 Micron for W1060AP & W1080AP
<b>W1060F5P</b>	Standard Filter Element Plastic 5 Micron for W1060AP & W1080AP
<b>W1085F5P</b>	Standard Filter Element Plastic 5 Micron for W1085AP & W1090
<b>W1085F40P</b>	Standard Filter Element Plastic 40 Micron for W1085AP & W1090





**W1130MB** Mount Bracket for W1130 / W1130B

**W1140MB** Mount Bracket for W1140

**W1160MB** Mount Bracket for W1160 / WB1340

**W1180MB** Mount Bracket for W1180 / W1185 / W1190 / WB1360 / WB1380



**W1130PN** Panel Nut for W1130 / W1130B

**W1140PN** Panel Nut for W1140

**W1160PN** Panel Nut for W1160 / WB1340

**W1180PN** Panel Nut for W1180 / W1185 / W1190 / WB1360 / WB1380



**WP1140TMB** Mounting Bracket for W1140T



**WP1140TPN** Panel Mount Plastic Nut for W1140T, W1160T & W1180T



**WP1180MBHD** Mounting Bracket for Regulator W1180






**WR1420-DP**

Desiccant Pack for WR1420



**WR1420-F**

Foam for WR1420



**WR1420-M**

Steel Mesh for WR1420



**WR1420-WF**

White Filter for WR1420



**WR1420-RK**

Repair Kit for WR1420



CO<sub>2</sub> REGULATORS FOR PNEUMATIC TOOLS

All Metal CO<sub>2</sub> Regulator has a 0-125 PSI pressure range with a maximum inlet pressure of 1200 PSI with a safety burst disc rating of 1800 PSI. Fits standard CO<sub>2</sub> paint ball & small beverage cylinders using 1/2" NPT threads. Comes standard with a pressure gauge, dial regulator knob & integrated steel belt clip. The Cylinder and Regulator are not for Oxygen service or use.

Model No.	Description
<b>WRCO2</b>	CO <sub>2</sub> Regulator 0-125 PSI (with Steel Belt Clip)
<b>WRCO2-NC</b>	CO <sub>2</sub> Regulator 0-125 PSI (without Steel Belt Clip)
<b>WRCO2L</b>	CO <sub>2</sub> Regulator 0-15, 30, 60 PSI 3 preset pressure settings
<b>WRCO2-CL20</b>	CO <sub>2</sub> Cylinder / Paintball Tank 20 oz (empty)
<b>WRCO2-CL24</b>	CO <sub>2</sub> Cylinder / Paintball Tank 24 oz (empty)
<b>WRCO2 - K1</b>	Kit includes: WRCO2 Regulator, HR14-012 Recoil Hose & CG440 Universal Coupler
<b>WRCO2 -K2</b>	Kit includes: WRCO2-K1 Kit with a CO <sub>2</sub> 20 oz DOT Aluminum Tank (Model # WRCO2-CL20)
<b>WRCO2-TF</b>	Kit includes: WRCO2 Regulator, HR14-010 Recoil Hose & TF3135 Tire Inflator
<b>WRCO2-TF2</b>	Kit includes: WRCO2 Regulator, WRCO2-CL20 DOT Cylinder, HR14-010 Recoil Hose & TF3135 Tire Inflator
<b>WRCO2-CL201</b>	Kit includes: 20 Oz. CO <sub>2</sub> Pin Valve Cylinder Tank Paintball
<b>WRCO2-CL20K1</b>	Adapter Converts CO <sub>2</sub> Paintball Tank To Soda Stream Soda Club CO <sub>2</sub> Cylinder Tank

**CG440**
**WRCO2-CL20 - 20oz**  
**WRCO2-CL24 - 24oz**

**WRCO2**  
 with Steel Belt Clip

**WRCO2 - NC**  
 without Steel Belt Clip

**HR14-010**  
 PU Recoil Hose 10ft.

**TF3135**  
 Tire Inflator



CO<sub>2</sub> FLOWMETER REGULATOR WITH SOLENOID VALVE**Model # WRFCO2S**

- Electrical Solenoid valve turns on and off the flow of CO<sub>2</sub>, optimizing the usage of CO<sub>2</sub>
- 5ft. 8" long - 110 volt UL approved 3-prong (household outlet) grounded power cord
- Self-Centering flow tube keeps ball centered to assure flow accuracy (precise 0.5-15 cubic feet per hour settings)
- Brass alloy body
- Easy-to-read 1.5" pressure gauge 0-3000 PSI with indicator of when tank needs to be refilled
- CGA320 inlet, maximum inlet: 3000 PSIG
- 17ft. long black 1/4" tubing & 2 plastic white washers

## PROPANE REGULATOR ASSEMBLY

**Model # WRP-6**

6 ft Steel Braided Hose and Fitting (CRREG-CR)

BURST DISC FOR WRCO2 CO<sub>2</sub> REGULATOR (2 PER PACK)**Model # WRCO2-22**

- Burst Disc for WRCO2. Comes in 2pcs/pack in a plastic bag
- Material: Copper

BURST DISC ASSEMBLY FOR WRCO2 CO<sub>2</sub> REGULATOR**Model # WRCO2-52**

- Burst Disc Material: Copper
- Cap Screw Material: Brass Hpb59-1, Chrome Plated
- Safety Cushion Material: Plastic, POM

**Kit Includes:**

- Burst Disc
- Safety Cushion
- Cap Screw



### ADAPTER CONVERTS CO2 PAINTBALL TANK TO STANDARD CGA320 MALE FITTING



**Model # WRCO2-5A4**  
Made from Machined Aluminum  
Screw in a CO2 Paintball Tank to  
this Adapter and use it as a  
Standard CGA320 Male Fitting

### ADAPTER CONVERTS CO2 PAINTBALL TANK TO PREFILLED DISPOSABLE CO2 MINI CARTRIDGE



**Model # WRCO2-320**  
Made from Machined Aluminum  
Screw in a CO2 Paintball Tank  
to this Adapter and use it as a  
Prefilled CO2 Cartridge

### ADAPTER CONVERTS STANDARD CGA320 MALE FITTING TO CO2 PAINTBALL TANK



**Model # WRCO2-4A5**  
Made from Machined Aluminum  
Screw in a large CO2 Tank with  
CGA320 Fitting and use it as  
a Paintball Tank

### ADAPTER CONVERTS PREFILLED DISPOSABLE CO2 MINI CARTRIDGE TO CO2 PAINTBALL TANK



**Model # WRCO2-320R**  
Made from Machined Aluminum  
Adapter converts Prefilled  
Disposable CO2 Mini Cartridge to  
Paintball Tank

### IN CO2 PAINTBALL (G1/2-14) TANK TO OUT CO2 DISPOSABLE (M16X1.5) MINI TANK ADAPTER



**Model # WRCO2-320-16**  
Made from Machined Aluminum  
Converts your paintball tank into  
a disposable CO2 cartridge

### IN CO2 PAINTBALL (G1/2-14) TANK TO OUT CO2 DISPOSABLE (3/8-24 UNF) MINI TANK ADAPTER



**Model # WRCO2-320-38**  
Made from Machined Aluminum  
Converts your paintball tank into  
a disposable CO2 cartridge

### IN CO2 DISPOSABLE (3/8-24 UNF) MINI TANK TO OUT CO2 PAINTBALL (G1/2-14) TANK ADAPTER



**Model # WRCO2-320R-38**  
Made from Machined Aluminum  
Converts your paintball tank into  
a disposable CO2 cartridge

### IN CO2 DISPOSABLE (5/8-24 UNF) MINI TANK TO OUT CO2 PAINTBALL (G1/2-14) TANK ADAPTER



**Model # WRCO2-320R-58**  
Made from Machined Aluminum  
Converts your paintball tank into  
a disposable CO2 cartridge

### ADAPTER CONVERTS CO2 PAINTBALL TANK TO SODASTREAM® SODA-CLUB CO2 ADAPTER



**Model # SS320**  
This Adapter replaces the  
SodaStream CO2 Tank with a  
Standard Paintball CO2 Tank  
Solid Brass Construction

### BURST DISC 3K RATING FOR CO2 PAINTBALL TANK



**Model # WRCO2-BD**  
The burst discs are used to replace  
damaged or broken or burst on  
your CO2 tank  
Prevents over-pressurization when  
filling your tanks

### BRASS PIN VALVE FOR CO2 PAINTBALL TANK



**Model # WRCO2-PV**  
Standard CO2 tank replacement  
head, fits standard 20 oz, 16 oz,  
12 oz, or 9 oz tanks  
Replaces a broken or damaged pin  
valve. Install with adhesive sealant



**Interstate Pneumatics Air Tool Oil ISO 22** is for use in all pneumatic tools and lubricators to protect and prolong tool life. Specially formulated grade (10-weight) non-detergent turbine oil. Eliminates dirty gum-up, prohibits rust, dries and removes moisture.

### AIR TOOL OIL (ISO 22)

Model No.	Description
<b>YL12-004</b>	4 oz Flip top cap bottle Air Tool Oil (ISO 22)
<b>YL12-008</b>	8 oz Flip top cap bottle Air Tool Oil (ISO 22)
<b>YL12-016</b>	16 oz Flip top cap bottle Air Tool Oil (ISO 22)
<b>YL12-128</b>	128 oz (1 gallon) Plastic Gallon Jar Air Tool Oil (ISO 22)

Model No.	Description
<b>YL12-004-12CS</b>	4 oz Flip top cap bottle 12/Case (ISO 22)
<b>YL12-008-12CS</b>	8 oz Flip top cap bottle 12/Case (ISO 22)
<b>YL12-016-12CS</b>	16 oz Flip top cap bottle 12/Case (ISO 22)
<b>YL12-128-4CS</b>	128 oz (1 gallon) Plastic Gallon Jar 4/Case (ISO 22)

FLIP TOP CAP



**Interstate Pneumatics Winter-Grade Air Tool Oil** allows lubrication down to -45°F. For use in all pneumatic tools and lubricators for protection to prolong tool life. Specially formulated grade (10 - weight) non-detergent turbine oil. Eliminates dirty gum-up, prohibits rust, dries and removes moisture.

### WINTER-GRADE AIR TOOL OIL

Model No.	Description
<b>YL14LT-004</b>	4 oz Flip top cap bottle Air Tool Oil
<b>YL14LT-008</b>	8 oz Flip top cap bottle Air Tool Oil
<b>YL14LT-016</b>	16 oz Flip top cap bottle Air Tool Oil
<b>YL14LT-128</b>	128 oz (1 gallon) Plastic Gallon Jar Air Tool Oil

Model No.	Description
<b>YL14LT-004-12CS</b>	4 oz Flip top cap bottle 12/Case
<b>YL14LT-008-12CS</b>	8 oz Flip top cap bottle 12/Case
<b>YL14LT-016-12CS</b>	16 oz Flip top cap bottle 12/Case
<b>YL14LT-128-4CS</b>	128 oz (1 gallon) Plastic Gallon Jar 4/Case

FLIP TOP CAP





## COMPRESSOR OIL (NON-DETERGENT) (ISO 68)

**SPECIAL FORMULA BY CHEVRON FOR ALL MOBILE & STATIONARY COMPRESSORS**

## FEATURES &amp; BENEFITS

**Extended equipment service life** — Special anti-wear additive package reduces wear by protecting surfaces when load causes breakdown of the lubricant film. High oxidation stability resists oil thickening and deposit formation in service, eliminating the need for unscheduled change of hydraulic fluid.

**Reduce downtime** — Effective rust and oxidation inhibitor system prevents the production of abrasive particles from rust formation and deposits, varnishes, and sledges from oil breakdown, which can damage equipment surfaces and seals and block filters prematurely.

**Trouble-free operation** — Good hydrolytic stability and water separation characteristics provide excellent filterability in the presence of water contamination. Good anti-foam and air release properties ensure smooth operation and system efficiency.

Model No.	Description
<b>YL10-016</b>	16 oz Flat top plastic bottle Non-Detergent Compressor Oil (ISO 68)
<b>YL10-032</b>	32 oz / 1 Quart plastic bottle Non-Detergent Compressor Oil (ISO 68)
<b>YL10-128</b>	128 oz / (1 gallon) Plastic Gallon Jar Non-Detergent Compressor Oil (ISO 68)



Model No.	Description
<b>YL10-016-12CS</b>	16 oz Flat top plastic bottle Non-Detergent Compressor Oil 12/Case (ISO 68)
<b>YL10-032-12CS</b>	32 oz / 1 Quart plastic bottle Non-Detergent Compressor Oil 12/Case (ISO 68)
<b>YL10-128-4CS</b>	128 oz / (1 gallon) Plastic Gallon Jar Non-Detergent Compressor Oil 4/Case (ISO 68)

## COMPRESSOR OIL Wt. 30 (NON-DETERGENT) (ISO 100-S)

Model No.	Description
<b>YL30-016</b>	16 oz Flat top plastic bottle Non-Detergent Compressor Oil Wt. 30 (ISO 100-S)
<b>YL30-032</b>	32 oz / 1 Quart plastic bottle Non-Detergent Compressor Oil Wt. 30 (ISO 100-S)

Model No.	Description
<b>YL30-016-12CS</b>	16 oz Flat top plastic bottle Non-Detergent Compressor Oil Wt. 30 12/Case (ISO 100-S)
<b>YL30-032-12CS</b>	32 oz / 1 Quart plastic bottle Non-Detergent Compressor Oil Wt. 30 12/Case (ISO 100-S)





## SYNTHETIC COMPRESSOR OIL

## SPECIAL FORMULA BY CHEVRON FOR ALL MOBILE &amp; STATIONARY COMPRESSORS

## FEATURES &amp; BENEFITS

**Extended equipment service life** — Special anti-wear additive package reduces wear by protecting surfaces when load causes breakdown of the lubricant film. High oxidation stability resists oil thickening and deposit formation in service, eliminating the need for unscheduled change of hydraulic fluid.

**Reduce downtime** — Effective rust and oxidation inhibitor system prevents the production of abrasive particles from rust formation, and deposits, varnishes and sledges from oil breakdown, which can damage equipment surfaces and seals, and block filters prematurely.

**Trouble-free operation** — Good hydrolytic stability and water separation characteristics provide excellent filterability in the presence of water contamination. Good anti-foam and air release properties ensure smooth operation and system efficiency.



Model No.	Description
<b>YL30S-016</b>	16 Oz Synthetic Compressor Oil - Flip Top Cap Bottle
<b>YL30S-032</b>	32 Oz Synthetic Compressor Oil - Screw-In Cap Bottle
<b>YL30S-128</b>	128 Oz Synthetic Compressor Oil - Plastic Gallon Jar

Model No.	Description
<b>YL30S-016-12CS</b>	16 Oz Synthetic Compressor Oil - Flip Top Cap Bottle - 12/Case
<b>YL30S-032-12CS</b>	32 Oz Synthetic Compressor Oil - Screw-In Cap Bottle - 12/Case
<b>YL30S-128-4CS</b>	128 Oz Synthetic Compressor Oil - Plastic Gallon Jar - 4/Case

## PRESSURE WASHER OIL - 30WT (NON-DETERGENT) (ISO 100-S)

Model No.	Description
<b>PW30-016</b>	16 oz - Non Detergent Pressure Washer Pump Oil 30 Wt
<b>PW30-032</b>	32 oz - Non Detergent Pressure Washer Pump Oil 30 Wt
<b>PW30-016-12CS</b>	16 oz - Non Detergent Pressure Washer Pump Oil 30 Wt - 12/Case
<b>PW30-032-12CS</b>	32 oz - Non Detergent Pressure Washer Pump Oil 30 Wt - 12/Case





## RED THREAD LOCKER IS A HIGH STRENGTH HEAVY-DUTY PROFESSIONAL FORMULA

**PART # TR750****PART # TR750-BX** - 12/Box

High Strength Thread Locker Prevents loosening and stop leakage from shock and vibration, particularly suited for heavy duty applications such as studs into motor housings, nuts onto studs in pump housings and other fasteners.

- Lock threaded fasteners from loosening during shock and vibration
- Single Component with no curing outside of threads
- Ideal for 1/4" to 1" dia Nuts & Bolts
- Cures in the absence of air without cracking & shrinking
- Size: 50ml (1.89 Fl Oz)
- Red Label / Red Bottle

**Red Thread Locker**

Breakaway / Prevailing  
190 / 275 in-lb  
on a 3/8" Bolt / Nut



## BLUE THREAD LOCKER IS A MEDIUM STRENGTH MEDIUM-DUTY PROFESSIONAL FORMULA

**PART # TB750****PART # TB750-BX** - 12/Box

Medium Strength Thread Locker designed for the locking and sealing of threaded fasteners which require normal disassembly with standard hand tools. Prevents loosening and stop leakage from shock and vibration.

- Lock threaded fasteners from loosening during shock and vibration
- Single Component with no curing outside of threads
- Ideal for 1/4" to 3/4" dia Nuts & Bolts
- Cures in the absence of air without cracking & shrinking
- Size: 50ml (1.89 Fl Oz)
- Blue Label / Red Bottle

**Blue Thread Locker**

Breakaway / Prevailing  
100 / 45 in-lb  
on a 3/8" Bolt / Nut





Interstate Pneumatics Replacement Compressor Pressure Switches fit many Dewalt®, Emglo®, Hitachi®, Makita®, Porter Cable®, Ridgid®, Rolair® & other brands using standard fittings.

## LF10-L4H PRESSURE SWITCH

- Four Port
- Push/Pull on-off Switch
- 1/4" NPT Female connection
- Cut off pressure 85-125 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-L1H PRESSURE SWITCH

- Single Port
- Push/Pull on-off Switch
- 1/4" NPT Female connection
- Cut off pressure 85-125 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-1H PRESSURE SWITCH

- Single port
- Short & Bend-Lever Switch
- 1/4" NPT Female connection
- Cut off pressure 85-125 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-4H PRESSURE SWITCH

- Four Port
- Short & Bend-Lever Switch
- 1/4" NPT Female connection
- Cut off pressure 85-125 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-1H-HP PRESSURE SWITCH

- Single Port
- Short & Bend-Lever Switch
- 1/4" NPT Female connection
- Cut off pressure 135-175 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-4H-HP PRESSURE SWITCH

- Four Port
- Short & Bend-Lever Switch
- 1/4" NPT Female connection
- Cut off pressure 135-175 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-1H-MP PRESSURE SWITCH

- Single Port
- Short & Bend-Lever Switch
- 1/4" NPT Female connection
- Cut off pressure 95-125 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF10-4H-MP PRESSURE SWITCH

- Four Port
- Short & Bend-Lever Switch
- 1/4" NPT Female connection
- Cut off pressure 95-125 PSI
- Amperage rating 20 Amps
- 6.3 mm Unloader valve connection



## LF17-1H PRESSURE SWITCH

- Single port
- Metal Box
- Contact arrangement normally closed
- 3/8" NPT Female connection
- Cut off pressure 145-175 PSI
- 6.4 mm Unloader valve connection
- Rating 24A/120V or 20A/240V



## LF16-111 WATER PRESSURE SWITCH

- Voltage Rating: 230VAC
- Allowable Pressure: 220 PSIG
- Number of poles: 2 - Pole
- Terminal Type: Screw Clamp
- Differential: 15 to 35 PSIG
- Pressure Connection: 1/4" NPT Female



## PUSH-BUTTON CIRCUIT BREAKER, COMPRESSOR THERMAL OVERLOAD SWITCH PROTECTOR



**SE17OLS** - 17A

**SE20OLS** - 20A

**SE30OLS** - 30A

Ampere: 30

Input Power: 125 VAC / 250 VAC

Dielectric Strength: 1500 VAC x 1000A, 250 VAC x 2000A







Insulation Resistance: >100 MΩ

Contact Endurance: 125 VAC x 15% of rated current - 500 cycles





Reset: Manual Push Reset / Auto Reset



## METAL BODY

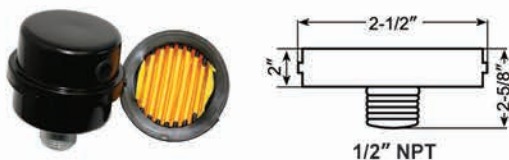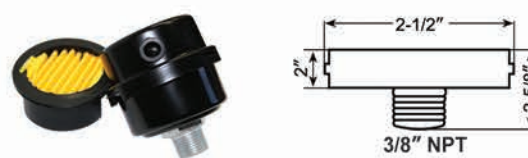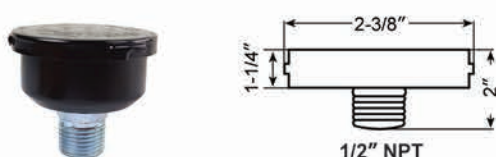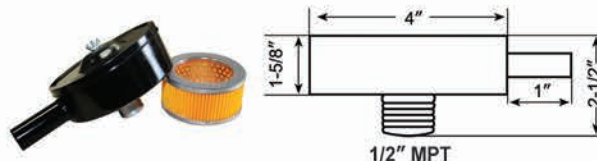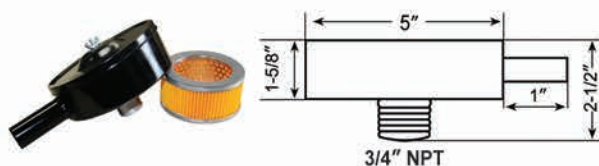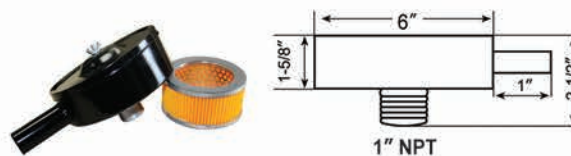**SA142 1/2" NPT AIR IN-TAKE  
FILTER + METAL BODY****SA143 PAPER CARTRIDGE  
+ SMALL 3/8" METAL BODY****SA144 PAPER CARTRIDGE  
+ SMALL 1/2" METAL BODY****SA9M PAPER CARTRIDGE  
+ LARGE METAL BODY****SA13 PAPER CARTRIDGE + METAL BODY****SA15 PAPER CARTRIDGE + METAL BODY**

## PLASTIC BODY

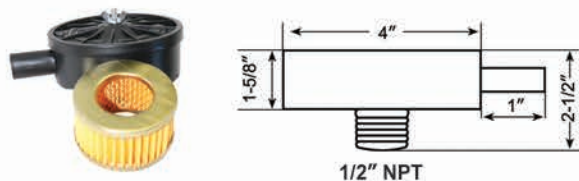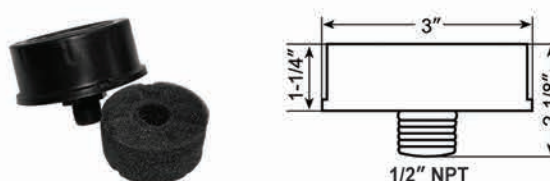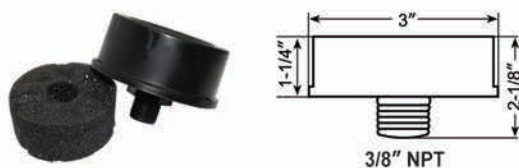**SA9 PAPER CARTRIDGE  
+ LARGE 1/2" PLASTIC BODY****SB191 SPONGE CARTRIDGE  
+ SMALL 1/2" PLASTIC BODY****SB192 SPONGE CARTRIDGE  
+ SMALL 3/8" PLASTIC BODY****SA17 AIR INTAKE FILTER ELEMENT**


Replaces  
(OEM # 17211-ZL8-023)

Compatible with  
Honda GCV160, GCV190  
& Husqvarna 7021P



## FILTER ELEMENT

### SA9F / SA13F / SA15F AIR FILTER ELEMENT ONLY



1 = Outside Diameter  
2 = Inside Diameter  
3 = Height

<b>SA9F Air Filter</b>	1 = 2-3/4"
	2 = 1-3/8"
	3 = 1-1/2"
<b>SA13F Air Filter</b>	1 = 3-3/16"
	2 = 1-3/4"
	3 = 1-5/8"
<b>SA15F Air Filter</b>	1 = 4-1/4"
	2 = 3"
	3 = 2-1/16"

### SA14F PAPER REPLACEMENT FOR SA142 + SA143



### SA144F AIR IN-TAKE FILTER FOR SA144



1 = Outside Diameter: 2"  
2 = Inside Diameter: 0.835"  
3 = Height: 1"

### SA16F AIR IN-TAKE FILTER ELEMENT FOR COMPRESSORS



1 = Outside Diameter: 4-3/8"  
2 = Inside Diameter: 3"  
3 = Height: 2-1/4"



## STARTING CAPACITORS



PART #	DESCRIPTION	TERMINALS	SHAPE / CASE	DIA	LENGTH
<b>CMC7010</b>	CD60 120-144 MFD +/-5% AC 250V	2	Round / Phenolic	1.42"	3.70"
<b>CMC7011</b>	CD60 100-120 MFD +/-5% AC 250V	2	Round / Phenolic	1.42"	3.35"
<b>CMC7012</b>	CD60 110-132 MFD +/-5% AC 250V	2	Round / Phenolic	1.42"	3.35"
<b>CMC7013</b>	CD60 60-72 MFD +/-5% AC 250V	2	Round / Phenolic	1.42"	2.70"
<b>CMC7014</b>	CD60 40-48 MFD +/-5% AC 360V	2	Round / Phenolic	1.42"	3.36"
<b>CMC7015</b>	CBB60 100MFD +/-5% AC 300V (8mm Thread)	2	Round / Phenolic	1.90"	4.30"
<b>CMC7016</b>	CBB60 120MFD +/-5% AC 300V (8mm Thread)	2	Round / Phenolic	1.90"	4.30"
<b>CMC7017</b>	CD60 250 MFD +/-5% AC 250/275V	2	Round / Phenolic	2.00"	4.00"
<b>CMC7018</b>	710-850 MFD +/-5% AC 125V	4	Round / Phenolic	xx"	xx"

## RUNNING CAPACITORS



4 TERMINALS



2 TERMINALS

PART #	DESCRIPTION	TERMINALS	SHAPE / CASE	DIA	LENGTH
<b>CMC7001</b>	CBB60 10MFD +/-5% AC 250V	4	Round / Phenolic	1.35"	2.85"
<b>CMC7002</b>	CBB60 10MFD +/-5% AC 450V	4	Round / Phenolic	1.35"	3.25"
<b>CMC7003</b>	CBB60 20MFD +/-5% AC 450V	2	Round / Phenolic	1.55"	3.20"
<b>CMC7004</b>	CBB60 40MFD +/-5% AC 450V	2	Round / Phenolic	1.80"	3.70"
<b>CMC7005</b>	CBB60 40MFD +/-5% AC 450V	2	Round / Phenolic	1.60"	2.90"
<b>CMC7006</b>	CBB60 50MFD +/-5% AC 450V	2	Round / Phenolic	1.60"	3.90"
<b>CMC7007</b>	CBB60 60MFD +/-5% AC 450V	2	Round / Phenolic	1.80"	3.90"



## COMPRESSOR RUBBER FEET

### CFR7022

Rubber Foot fits many compressors.

- OD = 1-3/4"
- Height = 7/8"
- Bolt Hole = 3/16"
- 4Pcs/pack



### CFR7032

Rubber Foot fits many compressors.

- OD = 2"
- Height = 1"
- Bolt Hole = 5/16"
- 4Pcs/pack



### CFR7044

Rubber Foot fits many compressors.

- OD = 1-1/2"
- Height = 3/4"
- Bolt Hole = 1/4"
- 4Pcs/pack



Rubber Foot with Metal Cylinder for Strength & Stiffness

## 1/4" NYLON SENSOR TUBES



### CTR7023

1/4" x 6.5" Nylon Sensor Tube with Compression Nut

### CTR7033

1/4" x 11.5" Nylon Sensor Tube with Compression Nut

## COMPRESSOR OIL FILL DIPSTICK



**CDS-78** Replaces DeWalt 5140016-78

**Compatible with:** D55151 Type-3, D55152 Type-1 & Type-2, D55153 Type-2 & Type-3, D55154 Type-1, E810-4V Type-1, AM782HC4V Type-2, FMFP70979 Type-1 Compressors

## COMPRESSOR DISCHARGE TUBES

### CPE7024

1/4" Compressor Copper Discharge Tube with 1/4" Compression Nuts for IP C1000 & other Compressors


Length = 13" Long



### CPE7034

After Cooler Copper Discharge Tube with Compression Nuts for IP C2000 & other Compressors

Length = 16" Long



## COMPRESSOR CHECK VALVES

### CVC7021

Fits IP C1000 & other Compressors



### CVC7041

Fits Emglo & other Compressors



with Cold Start Valve

### CVC7042

Fits Emglo & other Compressors



### CVC7043

Fits Emglo & other Compressors



### CVC7044

Fits Emglo & other Compressors









## COMPRESSOR VALVES &amp; FITTINGS

Air Compressor Cold Start Valve


**CVS7045**1/4" NPT  
1.7 BAR - 25 PSI**CVS7047**3/8" NPT  
1.7 BAR - 25 PSI**CVS7046**2-Way 2 Position  
110V  
Electric / Pneumatic  
Solenoid Valve  
1/4" NPT**CVH7047**3 Positions  
4 Ways Hand  
Lever / Rotary  
Pneumatic  
Valve  
1/4" NPT**CVH7048**Pneumatic Hand  
Valve - 5 Port  
4 Way 2 Position  
1/4" NPT**CPF98**Three-Way Brass  
Manifold  
Compressor  
Fitting 3/4" MPT  
(1) x 1/2" FPT**CPM18**Compressed  
Air Tank  
Fill / Release  
Valve**CPT44**Straight Tee  
Brass Compressor  
Fitting  
1/4" MPT (1) x 1/4"  
FPT (2)**CPT44-5**Five-Way Brass  
Compressor  
Fitting  
1/4" FPT (5)**CPX44-2**Four-Way Brass  
Compressor  
Fitting  
1/4" MPT (1) x 1/4"  
FPT (2) x 1/8" FPT

## COMPRESSOR VALVES &amp; FITTINGS (MADE IN USA)

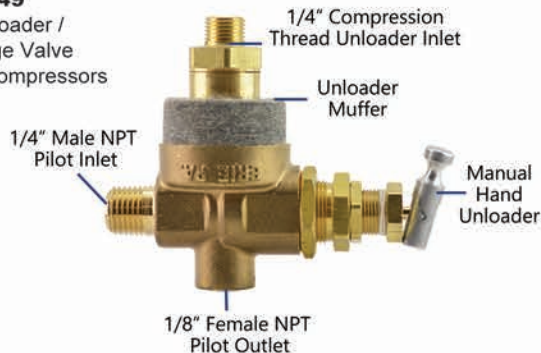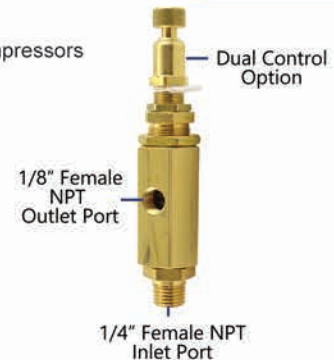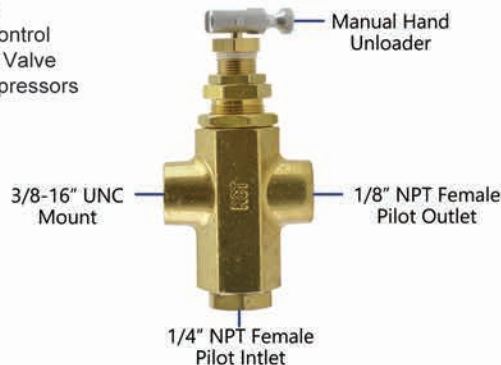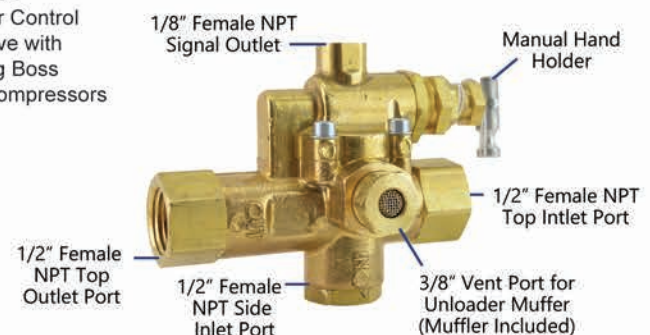**CVD7049**Pilot Unloader /  
Discharge Valve  
for Air Compressors**CVP7050**Unloader Control  
Pilot Valve for Air Compressors  
(Emglo / Dewalt style)**CVC7052**Unloader Control  
Pilot Check Valve  
for Air Compressors**CVP7051**Unloader Control  
Pilot Valve with  
Mounting Boss  
for Air Compressors



## AIR COMPRESSOR THROTTLE CONTROL CABLE FOR PILOT VALVE

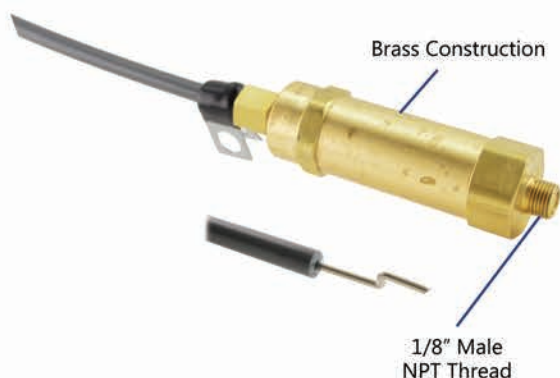

**CVT7053** - 24" Bullwhip

**CVT7054** - 36" Bullwhip

**CVT7055** - 3" Bullwhip

**CVT7056** - 6" Bullwhip



### Specification:

Min Actuation Pressure: 80 PSI

Max Operating Pressure: 500 PSI

Operating Temperature Range: -15° to 400°F

Stroke Length: 1.00"

Retracted Spring Force: 16.89 Lbf

Inlet Connection: 1/8" Male NPT

## PRESSURE RELIEF VALVES

**Interstate Pneumatics** Pressure relief valves are ASME certified safety devices which are designed to divert pressure in the event that a pressurized system of some kind encounters a problem which leads to a dangerous rise in pressure. Pressure relief valves are extremely useful, and required by law for safety reasons.

- **Body:** Brass
- **Spring:** Zinc plated steel
- **Seal:** Silicon rubber
- **Max Temp. Range:** 150°F



Model No.	Description	SCFM	Model No.	Description	SCFM
<b>V095-4</b>	1/4" MPT w/pull Ring - 95 PSI	54	<b>V150-4</b>	1/4" MPT w/pull Ring - 50 PSI	54
<b>V125-4</b>	1/4" MPT w/pull Ring - 125 PSI	45	<b>V165-4</b>	1/4" MPT w/pull Ring - 165 PSI	54
<b>V140-4</b>	1/4" MPT w/pull Ring - 140 PSI	45	<b>V165-8</b>	1/8" MPT w/pull Ring - 165 PSI	54
<b>V140-8</b>	1/8" MPT w/pull Ring - 140 PSI	45	<b>V200-4</b>	1/4" MPT w/pull Ring - 200 PSI	62

## CABLE OPERATED AIR TANK DRAIN VALVE



**VP44**  
Cable Operated Air Tank  
Drain Valve, 1/4" Male NPT  
with 5ft Cable

## COMPACT BALL VALVE 'Y' STRAINER



**VP48**  
1/2" x 1/4" MPT Compact Ball  
Valve 'Y' Strainer Combination  
(Male to Male) 600 PSI

## TIMED ELECTRIC AUTO DRAIN VALVE



**VDA-140**  
Timed Electric Auto Drain  
Valve, 1/4" NPT 110 Volts

## COMPRESSOR OIL SIGHT GLASS



**CSG7012**  
1/2" Male Thread

**CSG7034**  
3/4" Male Thread



## DRAIN COCK VALVES



Knurled Knob

**Interstate Pneumatics** Drain Cock Valve features solid brass construction and an internal seal design for a positive metal to O-Ring seal. Ideal for use in a variety of draining and bleeding applications. Maximum operating pressure 225 PSI.

**Model No**  
**VP42**

**Description**  
1/4" MPT - Knurled Knob Type



Wing Flange

**Interstate Pneumatics** Wing Flange Drain Cock Valve with a Zinc plated handle has external seal design for a positive metal to metal seal. Ideal for use in a variety of draining and bleeding applications. Maximum operating pressure 225 PSI.

**Model No**  
**VP21**  
**VP41**

**Description**  
1/8" MPT - Wing Flange Type  
1/4" MPT - Wing Flange Type

## MINI DRAIN VALVE

**Interstate Pneumatics** 1/4" Mini Drain Valve for Air Compressors. Just install this drain valve in your compressor and prevent water and air leakage. Maximum operating pressure 225 PSI.

Model No	Inlet Thread	Outlet Thread
<b>VP40</b>	1/4" FPT	1/4" MPT
<b>VP40B</b>	1/4" FPT	1/4" MPT



VP40



VP40B



## PRESSURE WASHER SPRAY GUNS

### FRONT INLET MODEL: PW7170

Max. Pressure 3200 PSI  
Inlet M22 Male  
Outlet M22 Female  
Max. Flow 7 GPM  
Max. Temperature 140°F



### REAR INLET MODEL: PW7171

Max. Pressure 3200 PSI  
Inlet M22 Male  
Outlet M22 Female  
Max. Flow 7 GPM  
Max. Temperature 140°F



### REAR INLET MODEL: PW7172

Max. Pressure 4000 PSI  
Inlet 3/8" FNPT  
Outlet 1/4" FNPT  
Max. Flow 7 GPM  
Max. Temperature 210°F



### REAR INLET MODEL: PW7173

Max. Pressure 5000 PSI  
Inlet 3/8" FNPT  
Outlet 1/4" FNPT  
Max. Flow 10.5 GPM  
Max. Temperature 300°F



### REAR INLET MODEL: PW7212

Max. Pressure 5000 PSI  
Inlet 3/8" FNPT  
Outlet 1/4" FNPT  
Max. Flow 10 GPM  
Max. Temperature 300°F



### HIGH PRESSURE WASHER PROFESSIONAL FOAM CANNON FOR CAR WASHING MODEL: PW7174

Max. Pressure 3000 PSI  
Inlet 1/4" Quick Disconnect  
Tank 33Oz. (1 Litre)  
Max. Flow 2.0GPM  
Max. Temperature 140°F



### MOLDED LANCE

MODEL: PW7177 12"

MODEL: PW7178 16"

MODEL: PW7179 24"

MODEL: PW7180 36"



Max. Pressure 4000 PSI  
Inlet 1/4" MNPT  
Outlet 1/4" MNPT  
Max. Temperature 300°F

### FGN25 Standard Car Washing Foam Spray Gun



### HF5CG Air Liquid Detergent Cleaning Blow Gun



MODEL: PW7181 Front Lance  
M22 x 14mm / 1/4" Quick Coupler / 16" Long

MODEL: PW7182 Front Lance  
M22 x 14mm / 1/4" Quick Coupler / 24" Long

MODEL: PW7183 Front Lance  
M22 x 14mm / 1/4" Quick Coupler / 36" Long

Max. Pressure 4000 PSI  
Inlet M22 x 14 mm  
Outlet 1/4" QC  
Max. Temperature 300°F



## AXIAL PISTON PUMP FOR 3/4" KEY SHAFT GASOLINE ENGINE

**PW5100**

Pressure	2500 PSI
Inlet	3/4" Male GHT
Outlet	M22 Male x 14mm
Flow	2.2 GPM
Engine Power	5.5HP
Speed	3400 RPM

**Features:**

Breathing cap reduces the pressure in oil case  
 Oil sightglass guarantees the correct oil volume  
 Thermal valve protects pump from overheating  
 Detergent suction port / with adjustment valve

**PW5200**

Pressure	3000 PSI
Inlet	3/4" Female GHT
Outlet	M22 Male x 14mm
Flow	2.3 GPM
Engine Power	6.5HP
Speed	3400 RPM

**Features:**

Breathing cap reduces the pressure in oil case  
 Oil sightglass guarantees the correct oil volume  
 Thermal valve protects pump from overheating  
 Detergent suction port / with adjustment valve  
 Build in Unloader

## AXIAL PISTON

**PW5308**

Pressure	3000 PSI
Inlet	NH 3/4" Female
Outlet	M22 Male
Flow	2.5 GPM
Engine Power	7HP
Speed	3400 RPM

**PW5201**

GPM	2.5
PSI	2600
HP	2.5
RPM	3400
Shaft	7/8"
Inlet	M22 Male

## HORIZONTAL SHAFT PRESSURE WASHER TRIPLEX PUMP ONLY W/O VALVE

**PW5309**

Pressure	3000 PSI
Inlet	GH 1/2" Female
Outlet	GH 3/8" Female
Flow	2.7 GPM
Engine Power	7HP
Speed	3400 RPM
Shaft	3/4"

**PW5310**

Pressure	4000 PSI
Inlet	GH 1/2" Female
Outlet	GH 3/8" Female
Flow	4 GPM
Engine Power	15HP
Speed	3400 RPM
Shaft	1"

NOTE: PW5309 & PW5310 ARE NOT COMPLETE PUMPS.



## STEEL BRAIDED RUBBER HOSES



### PW7200

1/4" x 25 ft  
3/8" MNPT Fixed x 3/8" MNPT Swivel  
Working Pressure 4000 PSI

### PW7201

3/8" x 50 ft  
3/8" MNPT Fixed x 3/8" MNPT Swivel  
Working Pressure 4000 PSI

## STEEL BRAIDED PVC HOSES



### PW7202

Size: 1/4" x 25 ft  
Fittings Size: M22 Female (Inlet/Outlet) with 14 mm Post  
Working Pressure: 3200 PSI  
Burst Pressure: 9600 PSI  
Max Temperature: 140°F

## DOUBLE BRAIDED GREY RUBBER HOSE



### PW7208

3/8" x 50ft with  
3/8" MNPT Fitting  
Working Pressure 6000 PSI

### PW7209

3/8" x 100ft with  
3/8" MNPT Fitting  
Working Pressure 6000 PSI

## STEEL BRAIDED GRAY RUBBER HOSE



**PW7210** - 50ft.

**PW7211** - 100ft.

Pressure Washer Steel Braided Gray Rubber Hose  
WP 4500 PSI - 3/8" MNPT Fixed & Swivel with Sleeve

## HOSE REEL



### PW7190

Hose Not Included  
Inlet: 3/8" MNPT  
Outlet: 3/8" FNPT  
Capacity: 100 Ft.  
Mounting Holes  
3 Ft. Lead Hose & Swivel Fitting included

## PRESSURE WASHER MANUAL HOSE REEL



**PW7191** - 100ft.

**PW7192** - 200ft.

Pressure Washer Manual Hose Reel Blue Powder Coated Steel - 3/8" Hose (Hose Not Included)

## PRESSURE WASHER AUTO-REWIND HOSE REEL



### PW7193

Pressure Washer Auto-Rewind Hose Reel 3/8" x 100ft  
3/8" MNPT x 3/8" MNPT



## NOZZLE TIP SET WITH DETERGENT TIP 0°, 15°, 25°, 40° &amp; 65° (5 PC KIT)



## 5 QUICK CONNECT HIGH PRESSURE SPRAY NOZZLES

0°, 15°, 25° &amp; 40° NOZZLES ARE STAINLESS STEEL

65° NOZZLE IS BRASS

MODEL #	SIZE	MAX FLOW	
<b>PW7100</b>	25	2.5 GPM	0°, 15°, 25°, 40° & 65° Detergent Tip
<b>PW7101</b>	30	3.0 GPM	0°, 15°, 25°, 40° & 65° Detergent Tip
<b>PW7102</b>	35	3.5 GPM	0°, 15°, 25°, 40° & 65° Detergent Tip
<b>PW7103</b>	40	4.0 GPM	0°, 15°, 25°, 40° & 65° Detergent Tip
<b>PW7104</b>	45	4.5 GPM	0°, 15°, 25°, 40° & 65° Detergent Tip

- 0° (Red) - Pencil Jet Nozzle
- 15° (Yellow) - High Performance Nozzle
- 25° (Green) - Multi Purpose Nozzle
- 40° (White) - Sensitive Surface Nozzle
- 65° (Black) Detergent Application (low pressure) Nozzle

## 1/4" QUICK CONNECT HIGH PRESSURE SPRAY NOZZLE TIPS



MODEL #	SIZE	MAX FLOW
<b>PW7100-DY</b>	25	2.5 GPM
<b>PW7101-DY</b>	30	3.0 GPM
<b>PW7102-DY</b>	35	3.5 GPM
<b>PW7103-DY</b>	40	4.0 GPM
<b>PW7104-DY</b>	45	4.5 GPM

Application - For 15° High Performance Nozzle  
 Color: Yellow  
 Material: Stainless Steel  
 Packaging: Retail Ready



MODEL #	SIZE	MAX FLOW
<b>PW7100-DW</b>	25	2.5 GPM
<b>PW7101-DW</b>	30	3.0 GPM
<b>PW7102-DW</b>	35	3.5 GPM
<b>PW7103-DW</b>	40	4.0 GPM
<b>PW7104-DW</b>	45	4.5 GPM

Application - For 40° Sensitive Surface Nozzle  
 Color: White  
 Material: Stainless Steel  
 Packaging: Retail Ready



MODEL #	SIZE	MAX FLOW
<b>PW7100-DR</b>	25	2.5 GPM
<b>PW7101-DR</b>	30	3.0 GPM
<b>PW7102-DR</b>	35	3.5 GPM
<b>PW7103-DR</b>	40	4.0 GPM
<b>PW7104-DR</b>	45	4.5 GPM

Application - For 0° Pencil Jet Nozzle  
 Color: Red  
 Material: Stainless Steel  
 Packaging: Retail Ready



MODEL #	SIZE	MAX FLOW
<b>PW7100-DG</b>	25	2.5 GPM
<b>PW7101-DG</b>	30	3.0 GPM
<b>PW7102-DG</b>	35	3.5 GPM
<b>PW7103-DG</b>	40	4.0 GPM
<b>PW7104-DG</b>	45	4.5 GPM

Application - For 25° Multipurpose Nozzle  
 Color: Green  
 Material: Stainless Steel  
 Packaging: Retail Ready



## 1/4" QUICK CONNECT HIGH PRESSURE SPRAY NOZZLE TIPS



MODEL #	SIZE	MAX FLOW
<b>PW7100-DB</b>	25	2.5 GPM
<b>PW7101-DB</b>	30	3.0 GPM
<b>PW7102-DB</b>	35	3.5 GPM
<b>PW7103-DB</b>	40	4.0 GPM
<b>PW7104-DB</b>	45	4.5 GPM

Application - For 65° Detergent Application (Low Pressure) Nozzle  
Color: Black  
Material: Brass  
Packaging: Retail Ready

## 1/4" FNPT MULTI FLOW ADJUSTABLE SPRAY NOZZLE (MAX O.P. 3000 PSI)



Multi Flow Adjustable Spray Nozzle.  
0° to 80° flat stream.

MODEL #	SIZE	MAX FLOW
<b>PW7110</b>	35	3.5 GPM
<b>PW7111</b>	40	4.0 GPM
<b>PW7112</b>	50	5.0 GPM
<b>PW7113</b>	45	4.5 GPM
<b>PW7114</b>	55	5.5 GPM

## QUICK CONNECT TURBO SPRAY NOZZLE (MAX O.P. 3000 PSI)



Comes with  
1/4" Plug

Quick Connect Turbo Spray Nozzle  
creates a powerful jet of water. Ideal for  
clearing Brick, Concrete and Vinyl.

MODEL #	SIZE	MAX FLOW
<b>PW7120</b>	25	2.5 GPM
<b>PW7121</b>	30	3.0 GPM
<b>PW7122</b>	35	3.5 GPM
<b>PW7123</b>	40	4.0 GPM
<b>PW7124</b>	45	4.5 GPM

## QUICK CONNECT PIVOTING COUPLER & NOZZLES KIT



Comes with  
1/4" Plug  
5 Quick Connect High Pressure  
Spray Nozzles  
0°, 15°, 25° & 40° Nozzles are  
Stainless Steel  
65° Nozzle is Brass

MODEL #	SIZE	MAX FLOW
<b>PW7115</b>	25	2.5 GPM
<b>PW7116</b>	30	3.0 GPM
<b>PW7117</b>	35	3.5 GPM
<b>PW7118</b>	40	4.0 GPM
<b>PW7119</b>	45	4.5 GPM

## PRESSURE WASHER NOZZLE




**Part# PW7213**  
Pressure Washer Drain Nozzle  
3/8" FNPT



### WET SAND BLASTER INDUSTRIAL & COMMERCIAL APPLICATION

#### PW5300

Hose 25 Ft long  
Tip 15° Degree for upto 3500 PSI  
Inlet 1/4" Plug  
Max Pressure 5500 PSI  
Max Temp. 140°F  
Max Flow 10 GPM

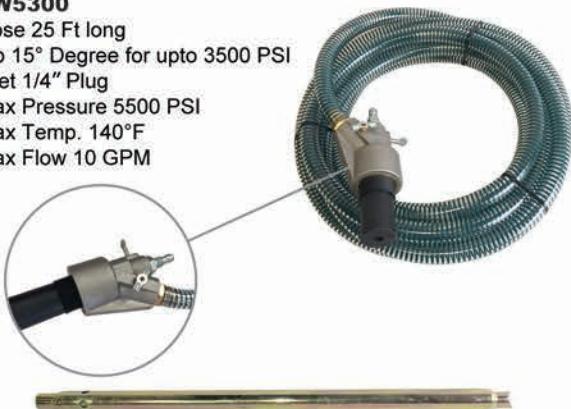

### WET SAND BLASTER DIY APPLICATION

#### PW5301

Hose 18 Ft long  
Tip 0° Degree  
Inlet 1/4" Plug  
Max Pressure 3500 PSI  
Max Temp. 140°F  
Max Flow 10 GPM



### 18" PROFESSIONAL GRADE SURFACE CLEANER

#### PW5303

18" Surface Dia  
Max Pressure 4000 PSI  
Max Flow 7 GPM  
Max Temp 180°F  
Inlet 3/8" Plug  
No Casters



### STAINLESS STEEL SURFACE CLEANER

#### PW5305

20" Stainless Steel Surface  
Cleaner 4500 PSI with Zinc  
Plated Casters Two Nozzle  
Spray Aluminum Rod



### STAINLESS STEEL SURFACE CLEANER

#### PW5306 - 14" PW5307 - 18"

Stainless Steel Surface  
Cleaner 4200 PSI



### 18' COMMERCIAL GRADE TELESCOPING SPRAY WAND

#### PW5304

18 Ft. Max Length  
6-1/2 Ft. Min Length  
Max Pressure 4000 PSI  
Max Flow 8 GPM  
Max Temp 210°F  
Pole Inlet 3/8" Quick Coupler  
Pole Outlet 22mm x 14mm Post Female  
Tip Inlet 22mm x 14mm Post  
Tip Outlet 1/4" Quick Coupler





## 1/4" BRASS COUPLERS



**PW7130** 1/4" FNPT  
**PW7131** 1/4" MNPT

MAX O.P. 4000 PSI MAX TEMP 300°F

## 3/8" BRASS COUPLERS



**PW7140** 3/8" FNPT  
**PW7141** 3/8" MNPT  
**PW7152** M22 Male  
**PW7154** M22 Female

MAX O.P. 4500 PSI MAX TEMP 300°F

## 1/2" BRASS COUPLERS



**CNV880B** 1/2" FNPT

MAX O.P. 4500 PSI MAX TEMP 300°F

## STAINLESS STEEL COUPLERS



**PW7135** 1/4" FNPT  
**PW7136** 1/4" MNPT  
**PW7144** 3/8" FNPT  
**PW7147** 3/8" MNPT  
**PW7223** 1/2" FPT  
**PW7224** 1/2" MPT

MAX O.P. 5200 PSI MAX TEMP 300°F

## BRASS PLUGS



**CPNV440B** 1/4" FNPT  
**CPNV441B** 1/4" MNPT  
**CPNV660B** 3/8" FNPT  
**CPNV661B** 3/8" MNPT  
**CPNV880B** 1/2" FNPT

MAX O.P. 1/4" 4500 PSI / 3/8" 2700 PSI / 1/2" 4500 PSI  
MAX TEMP 300°F

## STEEL PLUGS



**PW7132** 1/4" FNPT  
**PW7133** 1/4" MNPT  
**PW7142** 3/8" FNPT  
**PW7143** 3/8" MNPT  
**PW7155** M22 Female  
**PW7156** M22 Male

MAX O.P. 4500 PSI MAX TEMP 300°F

## STAINLESS STEEL PLUGS



**PW7134** 1/4" FNPT  
**PW7137** 1/4" MNPT  
**PW7145** 3/8" FNPT  
**PW7146** 3/8" MNPT  
**PW7225** 1/2" FPT  
**PW7226** 1/2" MPT

MAX O.P. 5200 PSI MAX TEMP 300°F

## M22 x NPT BRASS, ADAPTERS



**PW7150** M22 Male x 1/4" FNPT  
**PW7151** M22 Male x 3/8" FNPT  
**PW7153** M22 Female x 3/8" MNPT  
**PW7122** 1/4" FNPT Rotary Nozzles  
3000 PSI

MAX O.P. 4500 PSI MAX TEMP 300°F

## WATER FILTERS



**PW7160**  
1/4" Stainless Steel  
Plug x 1/4" MNPT 10.5 GPM

MAX. OP 5000 PSI MAX. TEMP. 300°F



**PW7162**  
Filter with 3/4" Female GHT x  
1/2" Male NPT 10.5 GPM

MAX. OP 300 PSI MAX. TEMP. 140°F

## ADJUSTABLE SOAP INJECTOR



**PW7161**  
Soap Injector with  
3/8" Plug x 3/8" Coupler  
Max. Pressure 4000 PSI  
Flow 2.1 to 3.5 GPM  
Max Temperature 300°F

## STAINLESS STEEL SWIVEL FITTINGS



**PW7165** 1/4" MNPT x 1/4" FNPT  
**PW7166** 3/8" MNPT x 3/8" FNPT

MAX. OP 4000 PSI MAX. TEMP. 300°F



**3/8" QUICK CONNECT COUPLER & PLUG WITH 1/4" FPT PRESSURE GAUGE PORT****PW7163**

Inlet & Outlet: 3/8"  
Gauge Port: 1/4" FPT  
Brass Construction

**QUICK CONNECT PIVOTING COUPLER****PW7164**

1/4" Quick Connector  
Rotation Angle of 90°  
MAX O.P. 4500 PSI  
MAX TEMP 300°F

**PRESSURE WASHER GAUGE KIT 3/8" QUICK CONNECT - 5000 PSI OIL FILLED****PW7167**

2-1/2" dial size, stainless steel case and easy to read, 0-5000 PSI single scale, oil filled for vibration proof  
Universal 3/8" quick connect socket and plug  
For pressure measuring on high pressure washer equipment

**PRESSURE WASHER PRESSURE GAUGE BOTTOM MOUNT - 6000 PSI OIL FILLED****PW7168 1/4" MPT****PRESSURE WASHER NOZZLE****PW7105**

Pressure Washer Nozzle, Protector with Bushing 1/4" Female NPT

**SURFACE CLEANER NOZZLE****PW7106**

1/4" Male NPT Stainless Steel Surface Cleaner Nozzle, 25 Degree, 10 GPM

**PRESSURE WASHER INLET FILTER****PW7108**

1" FNPT x 1" FNPT

**WATER INLET FILTER****PW7204**

3/4" Female NH x 1/2" MNPT

**PRESSURE WASHER UNLOADED VALVE****PW5311**

3/8" MNPT x 3/8" FNPT

**PRESSURE WASHER SAFETY VALVE****PW5313**

MAX O.P. 5000 PSIA

**GARDEN HOSE PLUG - BLACK PLASTIC****PW5312**

3/8" MNPT x 3/8" FNPT  
MAX O.P. 4000 PSI

**PW7138**

3/4-11.5 (GHT) Female

**PW7139**

3/4-11.5 (GHT) Male



## BRASS THERMAL VALVE



**PW7216**  
1/2" MNPT  
**PW7217**  
3/8" MNPT



**PW7218**  
1/4" MNPT

## PRESSURE GAUGE COUPLER



**PW7220**  
3/8" MNPT x 3/8" Quick Connect  
x 1/4" FNPT - Brass



**PW7222**  
3/8" Quick Connect x 3/8" Plug  
x 1/4" FNPT - Stainless Steel

## GARDEN HOSE QUICK CONNECT



**PW7157**  
3/4" Male GHT x  
1/4" Quick Coupling

## BRASS SWIVEL ADAPTER WITH FILTER SCREEN FOR PRESSURE WASHER PUMP



**PW7227**  
3/4" Female GHT  
x 1/2" MNPT

## 16-INCH WATER BROOM



**PW7203**  
3 fixed spray nozzles on rolling spray bar. Great for cleaning and rinsing any flat surface. Offers shorter cleaning times, energy savings and ease of use.

## PRESSURE WASHER ROTATING BRUSH



**PW7205**  
Feathered rotating bristles to avoid scratching painted surfaces; made of high-quality materials

## FIXED NYLON BRUSH



**PW7207**  
Inlet 1/4" Male Thread, 140 Degree, 3000 PSI

## CHROME GUTTER CLEANER



**PW7206**  
12" Chrome Gutter Cleaner (Gooseneck) Attachment  
Coupled with 1/4" Brass Quick Coupler x 1/4" Plug

## PRESSURE SWITCH



**PW7219**  
MAX. OP 4000 PSI



## PRESSURE WASHER NOZZLE

**PW7107**

Pressure Washer 6 In 1 Nozzle



## STANDARD THUMB LEVER SIPHON SPRAYGUN

**PW7126**

Pressure Washer Wand Side Handle with C-Clamp



## HANDLE ASSEMBLY

**PW7199**

Handle Assembly for PW7190



## PRESSURE WASHER OIL - 30WT (NON-DETERGENT) (ISO 100-S)

Model No.	Description
<b>PW30-016</b>	16 oz - Non Detergent Pressure Washer Pump Oil 30 Wt
<b>PW30-032</b>	32 oz - Non Detergent Pressure Washer Pump Oil 30 Wt
<b>PW30-016-12CS</b>	16 oz - Non Detergent Pressure Washer Pump Oil 30 Wt - 12/Case
<b>PW30-032-12CS</b>	32 oz - Non Detergent Pressure Washer Pump Oil 30 Wt - 12/Case





## SEALING TAPES

**4400155 (Packaged)**  
**6311098 (Bulk)**

1/2" x 100"



**4400156 (Packaged)**  
**6311099 (TT33) (Bulk)**

1/2" x 300" PTFE Thread



**4400157 (Packaged)**  
**6311100 (Bulk)**

1/2" x 600"



**4400160 (Packaged)**  
**6311102 (Bulk)**

3/4" x 520"



**MIL: T-27730A**

**Features:**

- Help create a secure seal
- Thread Seal tape made with PTFE for longevity
- Packaged on spool in convenient dispenser box
- Suitable for plastic, brass, copper, aluminum, and iron piping



## 12" x 14" SHOP TOWELS (RED)



PT722	3/pk
PT723	6/pk
PT725	12/pk
PT725-Carton	24/pk

**Features:**

- Easily absorbs liquids, oil, & grease
- Ideal for changing oil, refilling fluids & general automotive maintenance
- Great for cleaning most surfaces
- Strong, durable & great absorbent
- Washable & reusable

## 14" x 17" TERRY BAR MOP TOWEL (WHITE)



PT727	3/pk
PT728	6/pk
PT726	12/pk
PT729	25/pk

**Features:**

- 100% Super absorbent cotton ribbed terry towel
- Ideal for cleaning glasses, dishes, kitchen related utensils
- Widely used in countertops, hotels, bars, homes, restaurants and offices etc.
- Machine washable, tumble dry
- Extra absorbent, great strength, durable & soft

## 1 LB. BAG OF RAGS



PT710

**Features:**

- Multi-Purpose, absorbent & soft for small projects
- Excellent for staining, painting or general cleaning
- Perfect for auto, home, marine & shop use
- Soft & durable texture that won't scratch delicate surfaces
- Machine washable - Reusable - 100% New Material
- Multi-color assorted pack

## 3" x 4" TERRY STAINING PADS (WHITE)



PT705 4/pk

**Features:**

- Terry cover cloth is soft & absorbent, inner sponge soaks up excessive liquid
- Ideal for furniture, cabinets, hard floors, and all woodworking projects
- Woodworkers alternative to shop rags, foam brushes, paint pads & paint brushes
- Also perfect for automotive wax application

## 16" x 27" CAR WASH TOWEL



PT730 - 3/pk

**Features:**

- Perfect for interior & exterior car detailing
- All-purpose lint free, scratch free terry towel for car wash
- Machine washable, high absorbency towel

## 11" x 17" POLISHING CLOTH



PT731 - 3/pk

**Features:**

- Soft durable 2 Ply Cotton
- Perfect for polishing & buffing & wax removal
- Lint free & clear coat safe
- Washable & Reusable



This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.



This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.



[illegible]





# BRINGING YOU THE WIDEST RANGE OF PNEUMATIC PRODUCTS

With decades of experience in the industry, **Interstate Pneumatics®** is a brand that offers a complete range of professional-grade pneumatic products, parts, accessories, and other related items.

At Interstate Pneumatics we combine cutting-edge design and engineering with the highest quality manufacturing standards and rigorous quality assurance to yield a product range that ticks all the right boxes in terms of quality, performance, and durability. Interstate Pneumatics is committed to offering products that can go toe-to-toe with big name brands at a fraction of their prices.



Quality Assurance Commitment



Durable Craftsmanship



Cost-Effective Solutions

A Subsidiary of



**American**  
General Tool Group

Interstate Pneumatics Manufacturing

📍 Vista, CA 92081

[www.interstatepneumatics.com](http://www.interstatepneumatics.com)

